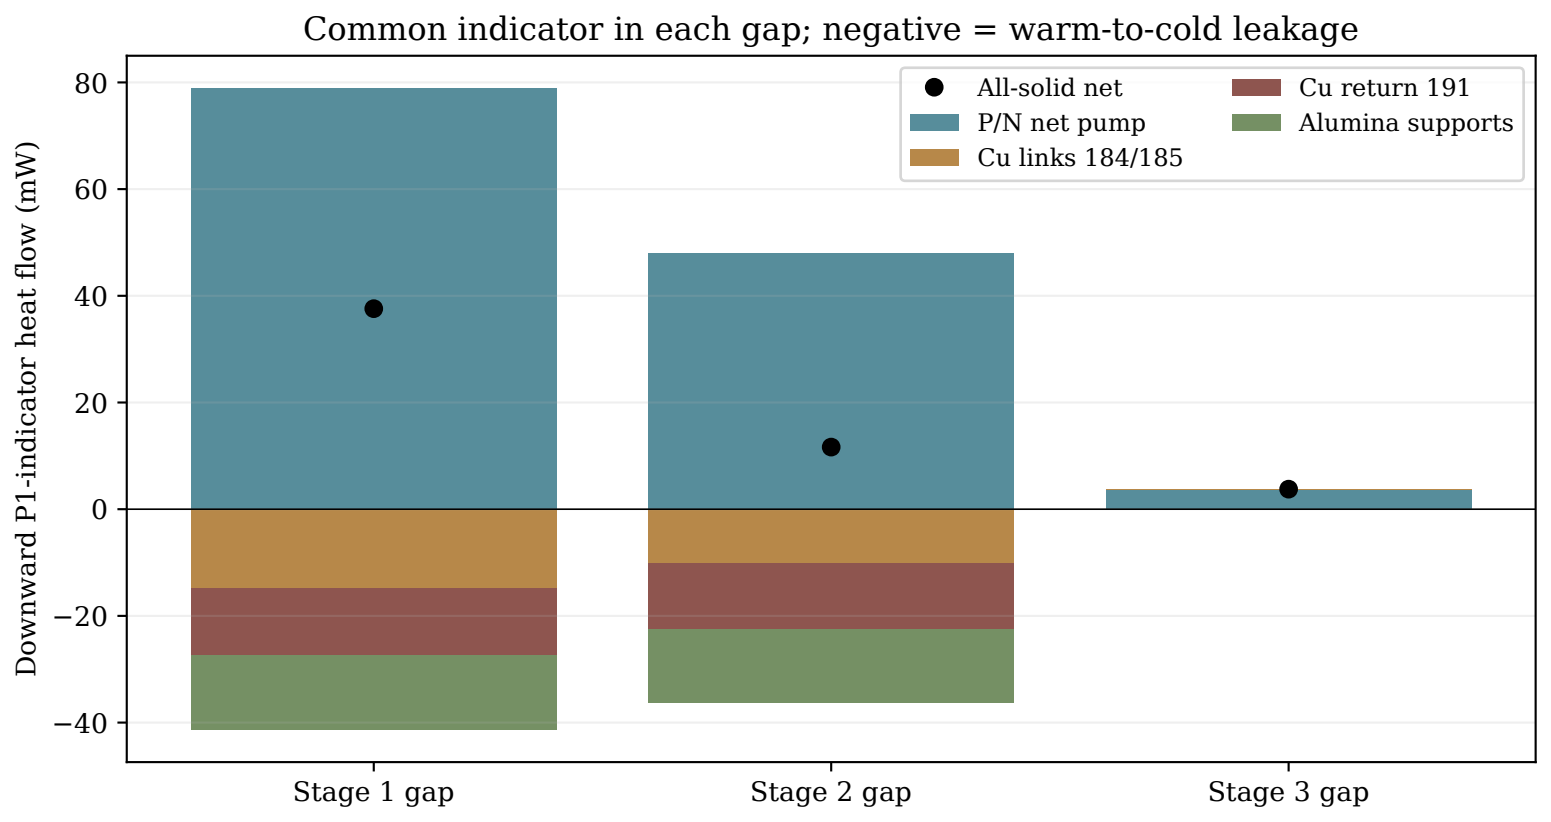
Common indicator in each gap; negative = warm-to-cold leakage
Downward P1-indicator heat flow (mW)
80
60
40
20
0
−20
−40
All-solid net
P/N net pump
Cu links 184/185
Cu return 191
Alumina supports
Stage 1 gap
Stage 2 gap
Stage 3 gap