
Thermoelectric Cooling of an HgCdTe Detector

Device Design, Heat Flow, and Electrical Performance

Three-stage cooler in a nine-pin package | 9 November 2026

PHYSICAL SCOPE. A three-stage cooler with a HgCdTe detector is evaluated using literature-informed thermoelectric properties, explicitly chosen package and joint assumptions, and calculated heat and current flow. The results describe a synthetic reference device, not a measured commercial product. Interstage foil heat leakage is now included through a conditional, source-CAD-based electrothermal multiport. True three-dimensional metal current spreading, deposited-film heat flow and measured joint impedances remain unresolved.

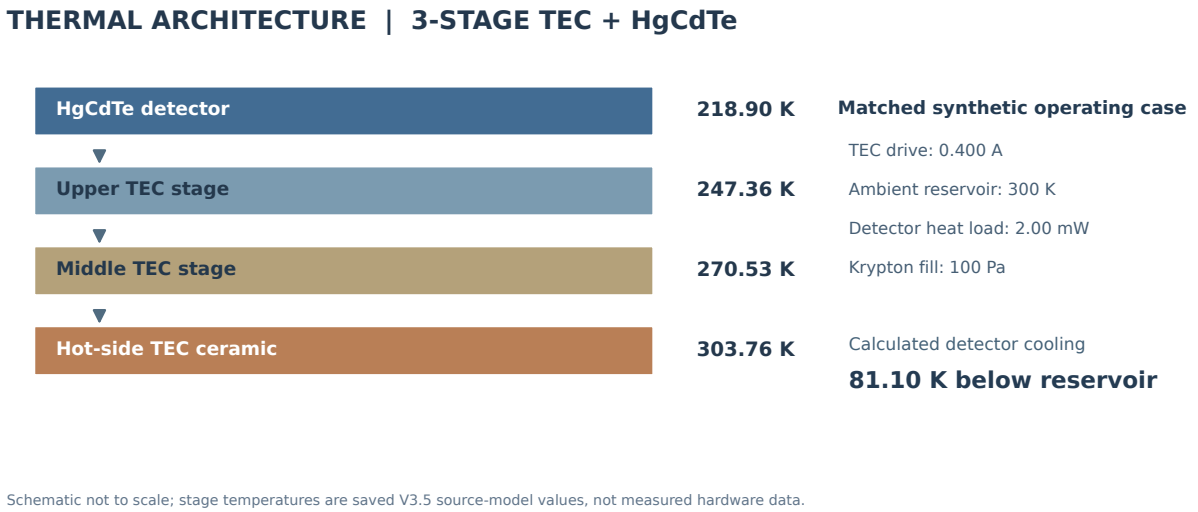

Conceptual thermal architecture of the current V3.5 operating point, with calculated hot-side ceramic and detector temperatures. This is a source-data schematic, not a geometrically scaled rendering or measured device. The true formed-foil CAD is shown later in the cooler-layout section.

Evidence standard. Calculated performance, material-property assumptions, source dimensions, and unresolved physical losses are separated throughout. A low residual demonstrates energy accounting, not measured detector performance.

Engineering summary

Question. How cold can a compact, three-stage thermoelectric cooler hold an HgCdTe photoconductor when heat must leave through a real package, and what thermal or electrical losses most threaten its performance?

A synthetic cooler is examined with four alumina substrates, 44 P/N thermoelectric couples divided among three stages (29 hot-side, 11 middle, 4 cold-side), soldered contacts, patterned metallization, supported formed copper-foil electrical transitions, and a HgCdTe die mounted at the cold end. The device occupies a proposed nine-pin metal package with a window. The interior is *physically designed*, but its material grades and joint specifications are not measurements of a commercial cooler.

Nominal operating condition: 0.400 A applied TEC current; 300 K ambient thermal reservoir; 2.00 mW imposed detector heat; 100 Pa krypton in the enclosure; literature-derived P/N transport curves and selected contact/heat-sink parameters. The calculated operating point is

$$\boxed{T_{\text{detector}} = 218.900\ \text{K}} \qquad \boxed{V_{\text{TEC}} = 1.489\ \text{V}} \qquad \boxed{P_{\text{electrical}} = 0.596\ \text{W}}.$$

This corresponds to an *approximately 81.10 K detector-to-reservoir temperature difference*, not a validated maximum TEC temperature drop or measured commercial specification. V3.3 without the formed copper bridge gave 210.625 K, while V3.4 with interstage copper and a combined power-lead approximation gave 218.833 K. The current V3.5 model resolves both TEC supply leads on their actual ceramic contact faces and produces 218.900 K, a total **8.275 K** above V3.3 under the declared reference hypotheses. The original V3.3 cavity-off/on comparison remains useful but is a separate earlier model-generation experiment.

Most important physical qualification: The newer electrical design removes the long unsupported copper-bar arrangement in favor of short formed foil links and a three-foot return, with defined ceramic landing pads. The current thermal calculation includes individually modeled P/N legs, 3D heat spreading through the four ceramics, solder/contact *electrical* losses, and effective package heat exchange. V3.5 retains the actual formed copper bridges and their three-foot return as an energy-conserving *reduced* electrical/thermal network, and corrects the two package-pin supply wires to original ceramic face 8 and 36. Its nominal Cu-lead temperature is 218.900 K. The nickel-like lead hypothesis differs by only +0.015 K, while a deliberately severe Cu interstage thermal-interface resistance changes the nominal result by **-6.276 K**. The extreme contact case is a sensitivity, not a recommended solder design. True 3D metal current crowding, solder thermopower and measured material/contact properties remain unqualified. Neither the former 210 K result nor the new 219 K result constitutes hardware validation.

Engineering use: The calculation identifies where energy is pumped, dissipated, parasitically imported or rejected, including about 110.6 mW removed from the hotter substrate through the V3.5 formed copper interstage connections, of which 87.2 mW enters the upper substrate; it predicts temperature, voltage and stage-by-stage heat loads under declared assumptions; and it provides a reusable starting point for evaluating metallurgy, foil geometry, contact thermal resistance, gas pressure and heat-sink design. Numerical mesh details and document-history evidence appear *after* the physical assessment.

Expanded TEC/TO design studies (9 November 2026). New separately audited source-architecture results examine matched P/N material transport screens, finite TO mounting resistance and matched-temperature TEC power, high-temperature transport-law continuation, and eight cavity gas/pressure and current cases. At 0.400 A and 30 kPa, the predicted top ceramic is 218.845 K with Kr, 219.277 K with Ar and 219.703 K with nitrogen; these values use a declared effective 3 mm gap, not a native three-dimensional cavity solution. The original geometric, electrical, temperature-field and numerical appendices are retained.

Contents

Engineering summary **2**

1 Device construction and thermal architecture **5**

2 Cooler layout and supported interstage connections **5**

3 Thermoelectric material behavior and heat pumping **7**

4 Heat spreading through ceramic substrates **7**

5 Electrical routing and interstage heat leakage **10**

6 Electrical contacts, solder joints and dissipative heating **11**

7 Package parasitic heat loads and thermal rejection **11**

8 Terminal wires, soldered TO pins, and thermal uncertainty **12**

9 Original V3.4 copper-bridge result and its physical explanation **15**

10 Current versus cooling performance: an operating envelope (V3.6) **17**

11 Thermoelectric transport sensitivity in the current cooler **20**

12 Package mounting and power required to hold a cold temperature **21**

13 Effect of cavity backfill on the TEC top stage **23**

14 Gas heat-transfer mechanism and its uncertainty **24**

15 Thermal loading, electrical demand, and engineering optimization **25**

16 Interstage copper, solder interfaces, and the TO mounting path (V3.12) **26**

17 Native foil-port qualification and the remaining 3D electrical gate (V3.13) **28**

18 Native electrical-contact spatial resolution: failed P2 qualification (V3.14) **29**

19 Lead9 contact-perimeter field attribution (V3.15) **30**

20 Independent finite-contact method benchmark and sharp-edge stress test (V3.16) **31**

21 Pellet size and electrical power: a frozen-boundary transport screen **33**

22 Taller pellets: historical assembly feasibility **35**

23 Original-device spatial gas coupling on native ceramic meshes **42**

24 Source-connected local copper temperatures and gas coupling **43**

25 Original detector-to-window gas path **44**

26 Geometric fidelity and remaining discretization risk **44**

27 Predicted detector temperature under enclosure loading **45**

28 Historical V3.3 stage temperatures, heat flow, and electrical input **45**

29 Historical V3.3 energy conservation and numerical credibility **46**

30 Device engineering implications and next experiment **47**

31 Model provenance and numerical evidence hierarchy **48**

32 Physical assumptions and reproducibility specification **49**

33 Scientific and engineering references **49**

A Complete 14-knot P and N transport source tables **50**

B All original 88 P/N leg centers **51**

C Native ceramic-face geometric and solved heat ledger **52**

D Verification boundaries and remaining work **54**

Reader navigation. The main assessment follows the physical device: construction and governing transport, interconnects and TO thermal paths, accepted operating conditions and sensitivity studies, then historical baseline comparisons, numerical verification and reproduction details. Historic simulations are retained as distinct source-model generations; the latest contact and material studies have explicit qualification limits.

1 Device construction and thermal architecture

Four nominal ceramic plates have square footprints 6.4, 5.2, 3.8 and 2.4 mm, each 0.5 mm thick. Eighty-eight P/N legs are 0.4 by 0.4 by 0.5 mm each, grouped into 58, 22 and 8 legs from hot to cold. The TEC supply is connected to header pins 1 and 9; the HgCdTe photoconductor has separate bias contacts on pins 7 and 8. The gold-colored contact patterns on the ceramic are internal series metallization and solder lands, *not* the external positive and negative power terminals. The exported reference contains 824 CAD solids and 176 solder joints, 89 insulated TEC electrical nets, and formed internal metal links. The original long, unsupported copper routing

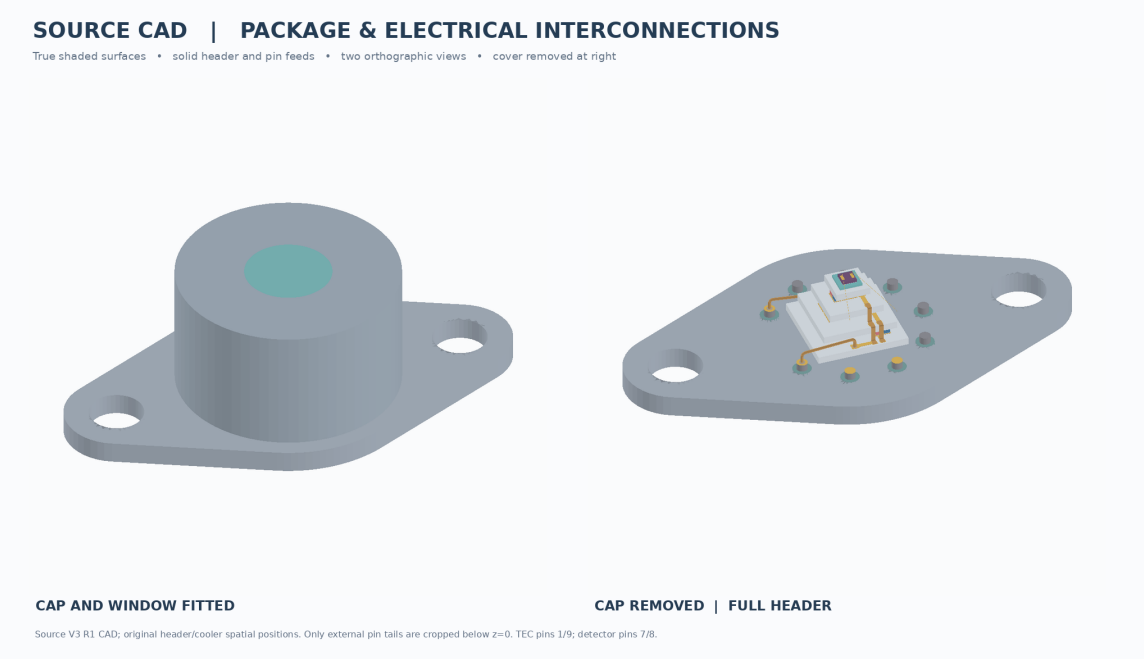


Figure 1: Physical arrangement of the proposed packaged HgCdTe device. Left: closed metal cap and optical window above the nine-pin header. Right: identical source-derived assembly with cover removed, exposing the thermoelectric stack, foil connections, TEC supply leads, and separate detector wiring. The external lead tails below the header are cropped for clarity; the mechanical assembly is synthetic, not a manufactured module.

was rejected. The replacement has formed Cu-family foil tabs across nets 58 and 80, plus an extended three-foot return net 88 with a real middle thermal landing. Its design uses patterned ceramic metallization and finite solder footprints. The selected foil section is 0.300 by 0.030 mm; its bend radius is 0.075 mm; finished foot joints are specified at 20 plus/minus 5 micrometres. No measured current rating or fatigue qualification follows.

2 Cooler layout and supported interstage connections

The shaded views below tessellate the original 824-body source geometry using a true per-pixel depth buffer. The previous mean-face-depth renderer wrongly displayed hidden metallization through ceramic solids. This rendering is neither a reconstructed cooler nor an exploded assembly. All plates, P/N legs and analytically bent copper foil links retain the source positions, widths, heights, polarities and original path radii. Compared with the wireframe, the opaque solid bodies make the differences from the rejected long copper-post construction readily visible.

2.1 Actual interstage foil cross-sections

The design uses two short supported formed copper-foil stage links (nets 58 and 80), and a longer stepped return (net 88). The last has two vertical steps and three physical feet, including an intermediate thermal landing. Unlike

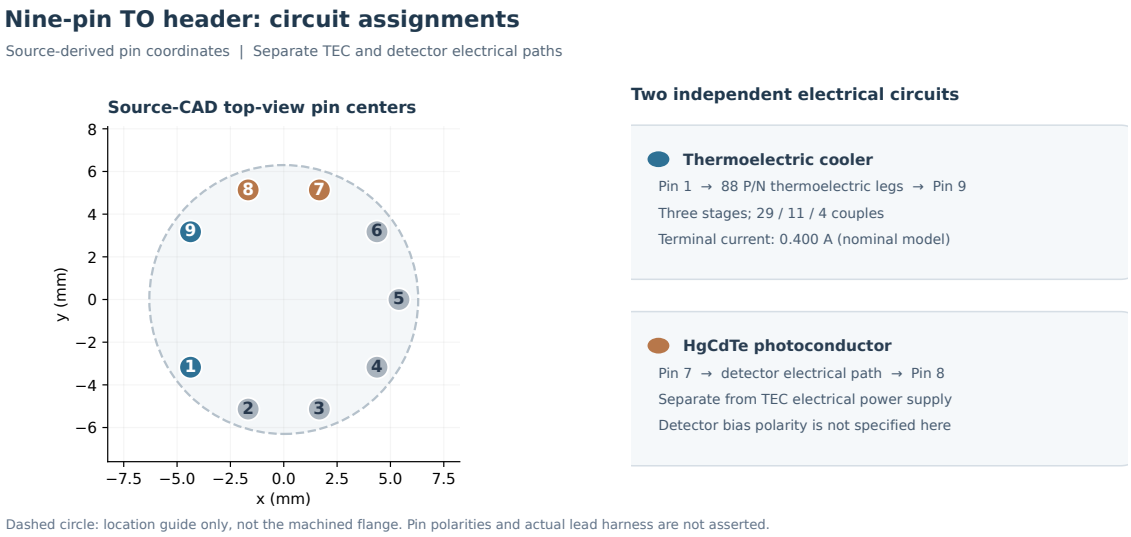


Figure 2: Source-registered physical top-projection of all nine header feedthrough centers in millimetres. Blue pins 1 and 9 connect the thermoelectric series path; orange pins 7 and 8 connect the separate HgCdTe photoconductor circuit. The pin-location guide is not the real machined header outline. No unverified polarity or wire-harness assignment is implied.

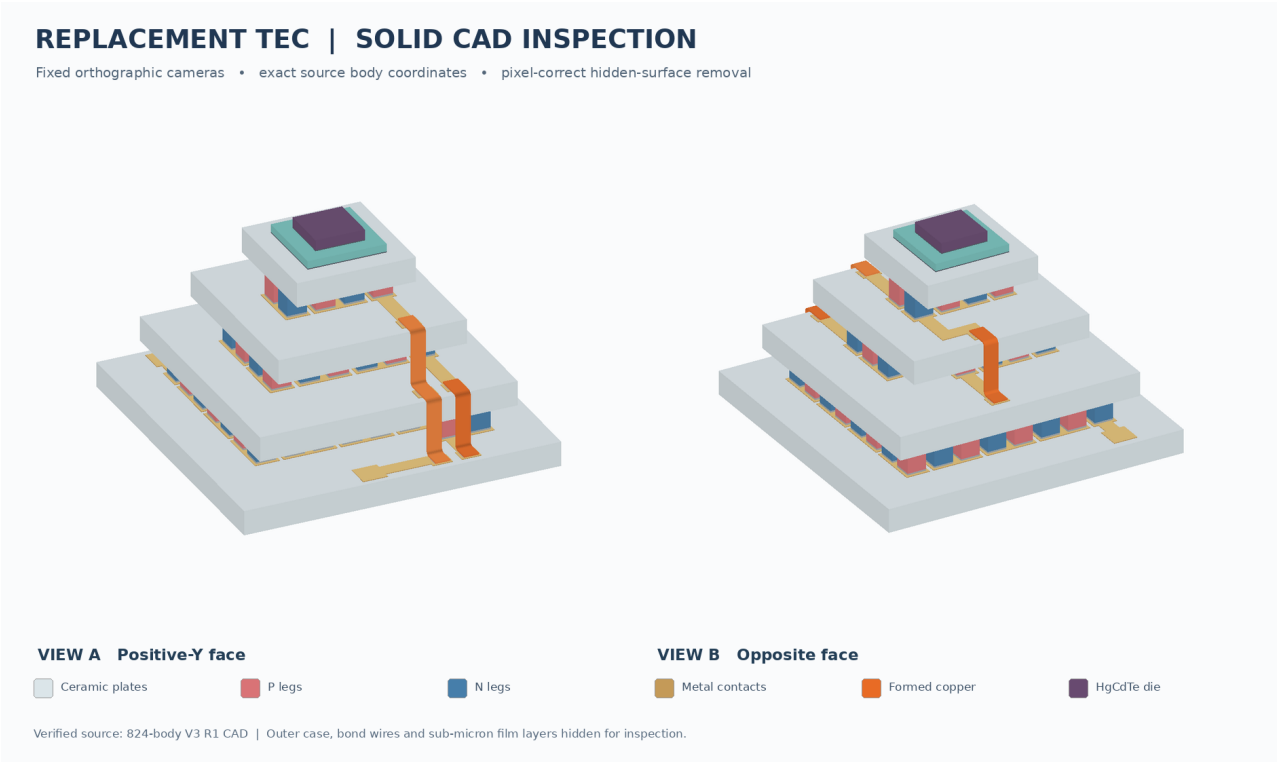


Figure 3: Correctly depth-occluded replacement geometry from two orthographic views: four ceramic stages, 58/22/8 P/N legs, visible exposed metallization only, and actual formed copper-foil connections. The external case, leads and very thin buried film layers are intentionally omitted. Original analytic foil-bend paths are sampled for shaded display, without relocating any CAD features.

a generic connecting rod, its cross-section has nominal width 0.300 mm, thickness 0.030 mm and bend radius 0.075 mm. The foil is represented at actual thickness, not enlarged for visibility.

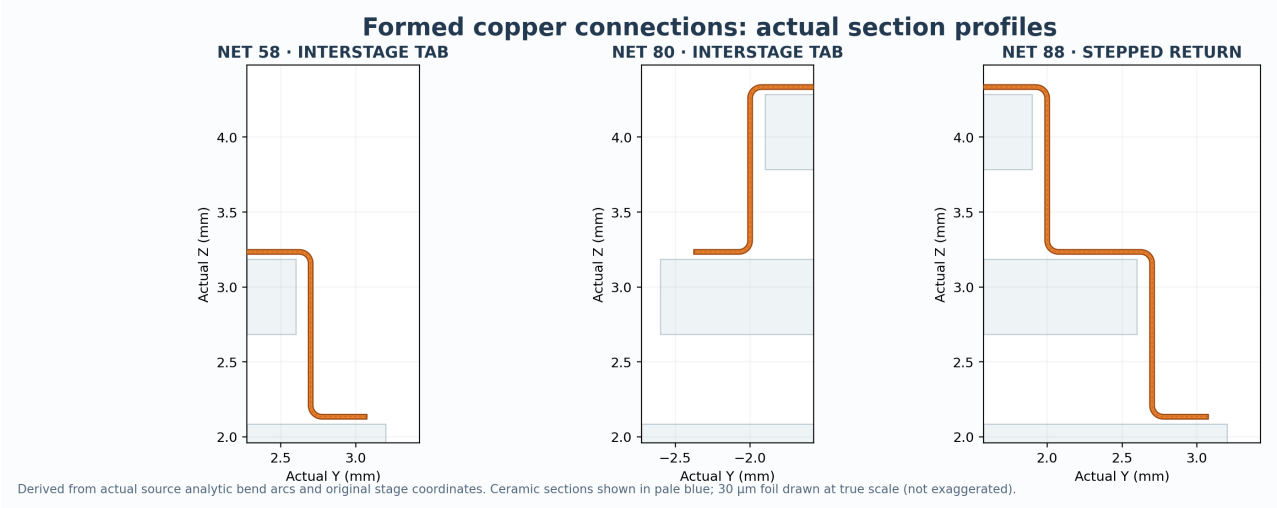


Figure 4: Y–Z sections reconstructed from the source analytic straight and circular-arc geometry at original coordinates, without exploded offsets. Pale blue regions indicate where ceramic cross-sections intersect each foil plane. The 30-micrometre copper thickness is drawn at true scale.

This original-CAD visualization establishes the mechanical design, rather than a simulated copper current or temperature field. V3.4 and V3.5 now account for foil conduction, Joule loss and finite metal/ceramic thermal contacts with a conservative reduced multiport. True three-dimensional current crowding, metallization-sheet spreading, measured joints and actual fabrication remain outside the qualified model.

3 Thermoelectric material behavior and heat pumping

Each of the 88 axial P/N legs uses a signed 0.4 A series current and 32 longitudinal intervals. With z directed hot-to-cold, $S(T)$ Seebeck coefficient, $\rho(T)$ resistivity, $k(T)$ conductivity, and signed current density J, the constitutive conservation model is

$$q = S(T)TJ - k(T)\frac{dT}{dz}, \qquad \frac{dq}{dz} = J\left[\rho(T)J + S(T)\frac{dT}{dz}\right], \qquad \frac{dV}{dz} = \rho(T)J + S(T)\frac{dT}{dz}.$$

Midpoint constitutive evaluation and damped Newton iterations enforce thermal and electrical conservation at local temperatures, including the boundary identity $Q_h - Q_c = IV_{\mathrm{leg}}$. The material source is a 14-knot figure digitization of research P-HE and N-HE-1 specimens over 40–300 K. Above 300 K the code uses an *unmeasured* one-quarter final-segment slope continuation; this is not a production material characterization.

4 Heat spreading through ceramic substrates

Each ceramic independently solves

$$-\nabla \cdot (k_c \nabla T) = 0, \qquad K_{ab} = \sum_e \int_{\Omega_e} k_c \nabla N_a \cdot \nabla N_b \, d\Omega, \quad b_a = \sum_f \int_{A_f} N_a q_f \, dA,$$

with $k_c = 30\,\mathrm{W/(m\,K)}$ a selected constant-property alumina analogue. Original face-specific P/N leg heat and assumed joint/cavity contributions are distributed over native TRI3 pad faces; source-local pad means feed back into leg end temperatures. Four archived source meshes contain 4,936 / 4,085 / 1,986 / 784 TET4 elements, totaling 11,791 tetrahedra.

4.1 Preserved spatial evidence: original V3.3 and current V3.5

The original source-ceramic temperature field from the earlier V3.3 reference is retained below as a *historical baseline*. Its thermal state omits the later copper-interstage multiport and independently located TEC lead boundary conditions; it must not be mistaken for a field from the present operating-point calculation.

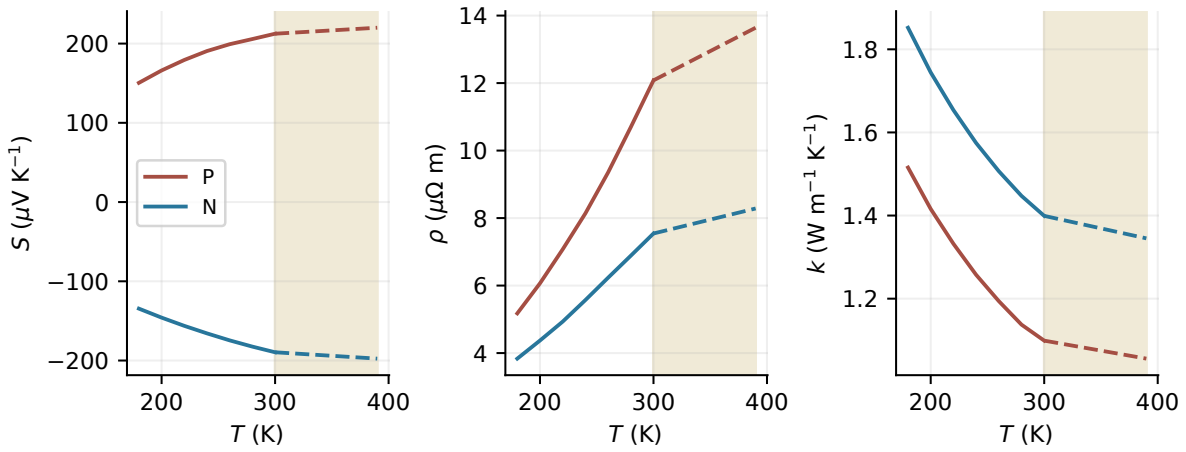


Figure 5: Source-derived P/N research analog properties. The shaded/dashed extension beyond 300 K is explicitly assumed; 58 hot-stage leg contacts exceed the research marker range.

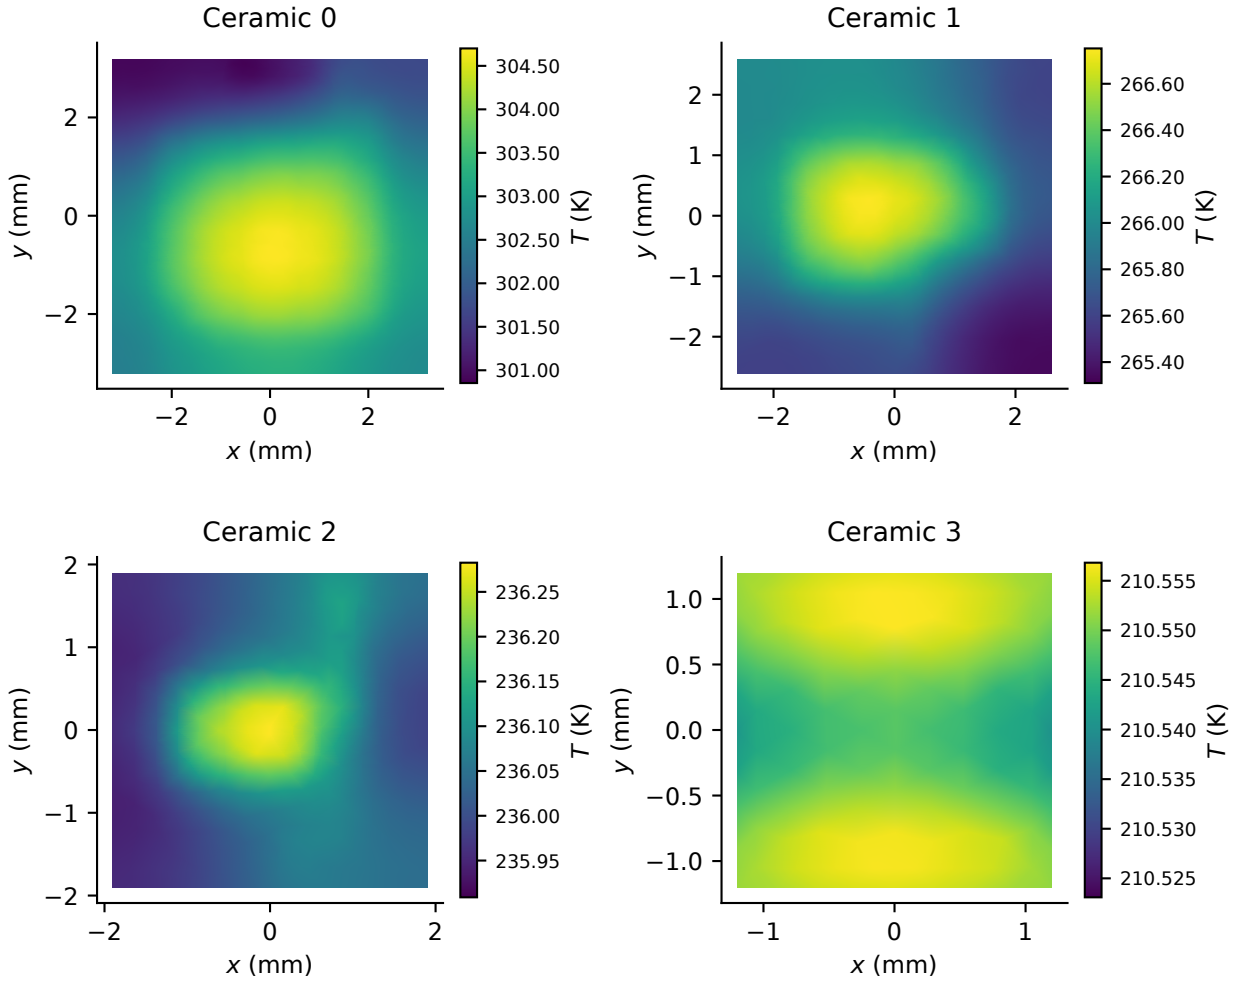


Figure 6: Preserved original V3.3 four-ceramic spatial FEM fields and source tetrahedral surface triangulations, calculated for the older reference without the V3.4 formed-copper heat network or V3.5 corrected TEC lead-pad heat. This is the original evidence, not a replacement or a claim of validated device temperature.

4.2 Current V3.5 source-ceramic temperature field

The revised V3.5 temperature plots use the *same original ceramic discretization* but a different, more complete interstage copper/terminal-wire heat budget. These two figures intentionally coexist: the old field is preserved, and the updated field is appended with its own physical assumptions. The four fields share their temperature gauge

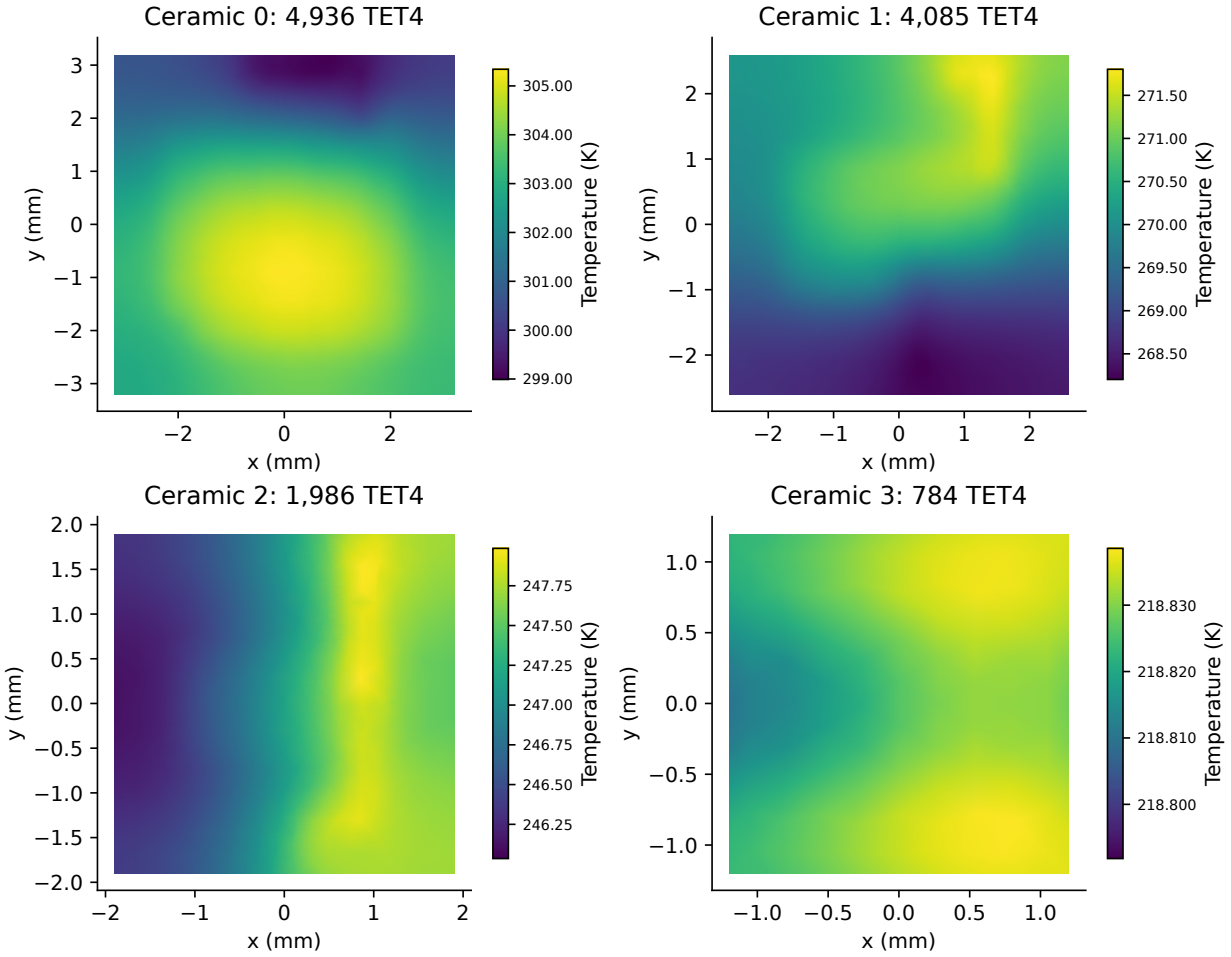


Figure 7: Accepted current V3.5 operating-point temperature on the original frozen 11,791 source-ceramic TET4 elements. The original upper-surface TRI3 boundary is colored by the saved spatial FEM nodal solution at 0.400 A, 300 K, 2 mW detector load, 100 Pa krypton and nominal Cu contacts. These are actual solved ceramic temperature fields; there is no claim of full 430-domain bulk-metal electrothermal FEM.

and stage heat exchange with the nonlocal reduced network. This is a single-mesh spatial result; no independent mesh-converged thermal accuracy bound is available.

5 Electrical routing and interstage heat leakage

The CAD conductor graph verifies all 88 legs as articulation vertices in the pin-1-to-pin-9 series circuit: removing any one leg disconnects the two terminals. Native transitions pass from P leg 57 to N leg 58 through tab 58, and from P79 to N80 through tab 80. The final leg P87 is connected to pin 9 through stepped return 88. These checks prove intended topology but not the temperature-dependent electrical or thermal properties of the connections. For a uniform slender conductor with temperature-dependent material properties,

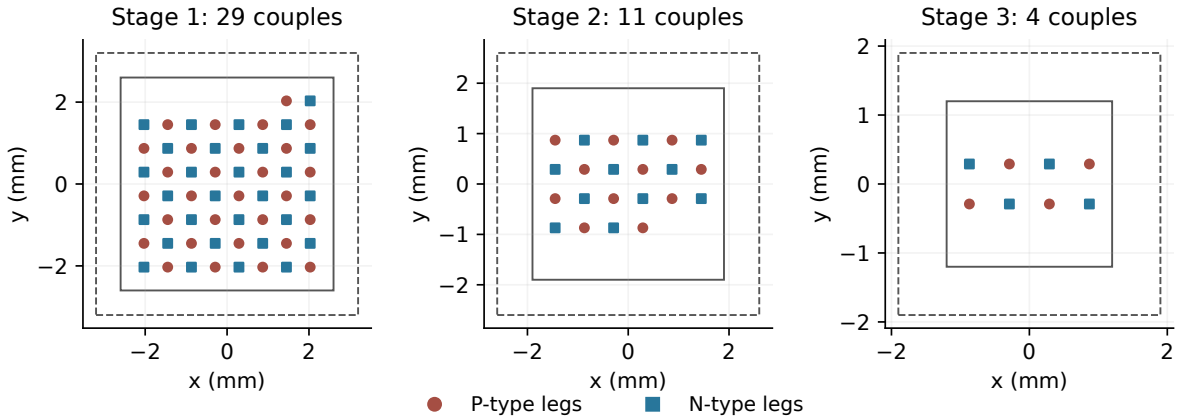


Figure 8: Actual saved stage-specific P/N leg centroids and plate footprints. This verifies the source positions used in the working hybrid; it does not depict a solved copper-tab thermal field.

$$R_e = \int_0^L \frac{\rho(T,s)}{A(s)}\,ds, \qquad G_{\text{th}} = \left[\int_0^L \frac{ds}{k(T,s)A(s)}\right]^{-1}, \quad P_J = I^2 R_e.$$

The registered neutral path lengths are 1.96062 mm (net58), 1.97062 mm (net80), and 3.70624 mm (return88). Using a uniform 0.300 by 0.030 mm section, illustrative $\rho_{\text{Cu}} = 1/(58\times10^6)\,\Omega\text{m}$ and $k_{\text{Cu}} = 385\,\text{W/(m K)}$ yields the approximate geometry-only screen below. The competing design goals are explicit: reducing electrical resistance

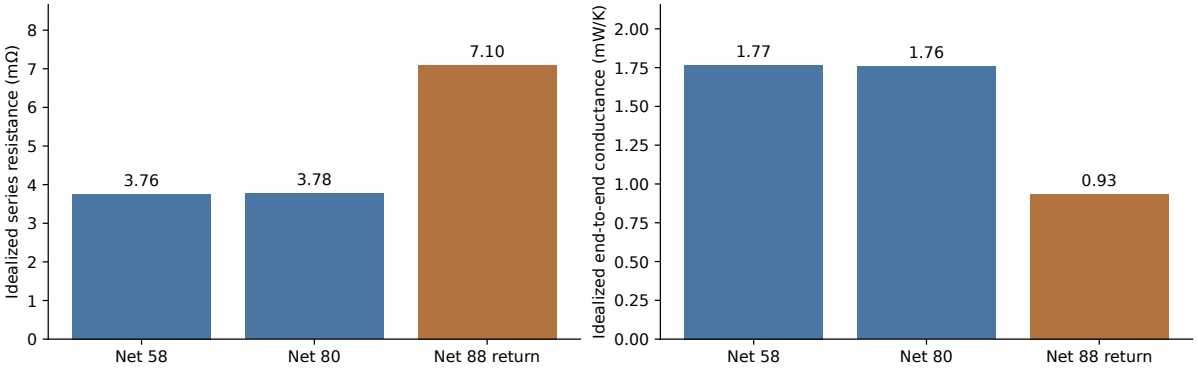


Figure 9: Historical pre-V3.4 screening of idealized uniform-bar electrical and thermal copper coefficients. Actual formed-tab bends, patterned multilayer film, contact drops, variable temperatures, Joule partition and intermediate return landing are not resolved. The return is not correctly represented by a single two-terminal thermal conductance.

through a larger cross-section increases passive thermal coupling. This geometry-only conductance screen is archived from the pre-V3.4 design assessment; the source-face, three-terminal return multiport is now included in V3.4/V3.5 and documented earlier. Its assumed interface and bulk properties, rather than the electrical path topology, now dominate outstanding thermal uncertainty.

6 Electrical contacts, solder joints and dissipative heating

The preserved source-solder model assumes 176 solder bodies of 35 micrometres thickness and 0.16 mm^2 area, with assumed SnSb resistivity $1.7 \times 10^{-7}\ \Omega\,\mathrm{m}$ and 352 assumed metal-interface specific resistances $r_c'' = 10^{-11}\ \Omega\,\mathrm{m}^2$. For each joint the resistance is

$$R_j = \rho_{\mathrm{SnSb}} \frac{L_j}{A_j} + 2\frac{r_c''}{A_j}, \quad R_{\mathrm{all}} = 0.028545\ \Omega, \quad I^2 R_{\mathrm{all}} = 4.56720\ \mathrm{mW}.$$

The implementation places 25.950 micowatts per source joint into its neighboring ceramic pad. This assumes the entire joint Joule heat reaches a ceramic and omits finite thermal-contact drops, interfacial thermopower and nonlocal copper-network heating. The four ceramic applied-joint terms, in mW, are [1.50510, 2.07600, 0.77850, 0.20760]. External TEC supply Cu wires and detector Au bonds are separate electrical/thermal links. *The formed tabs/return are accounted for by the separate V3.4/V3.5 reduced copper network described earlier, not by the solder-only term above.*

7 Package parasitic heat loads and thermal rejection

The reference forward case imposes a 300 K cap/window/ambient thermal reservoir, a 100 Pa krypton environment, an effective 3.0 mm gas gap, accommodation 0.8, and nominal gas conductivity knots $k_{\mathrm{Kr}}(200, 300, 400\,\mathrm{K}) = (0.0064, 0.0095, 0.0122)\ \mathrm{W/(m\,K)}$. Gray radiation uses assumed emissivities $\epsilon_{\mathrm{cap}} = 0.20$, $\epsilon_{\mathrm{ceramic}} = 0.80$, and $\epsilon_{\mathrm{window}} = 0.10$, with selected effective view factors. The source effective exposed surface areas are [12.60, 8.68, 4.76, 1.00] mm^2. The generic exchange terms are

$$Q_{\mathrm{gas},i} = G_{\mathrm{eff,i}}(p,T)(T_\infty - T_i), \qquad Q_{\mathrm{rad},i} = \epsilon_{\mathrm{eff},i}\sigma A_i F_i (T_\infty^4 - T_i^4).$$

These are *effective engineering closures*, not cavity fluid dynamics, true free-molecular transport, exact exposed-face loads, spectral window modeling or full radiosity.

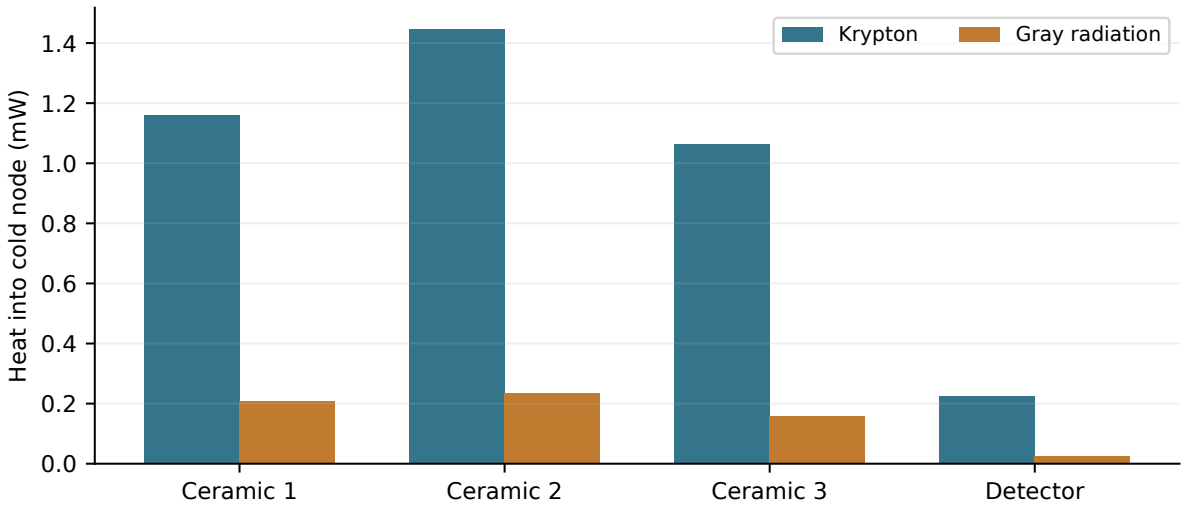


Figure 10: Archived V3.3 cavity contributions: total gas 3.892553 mW, gray radiation 0.624076 mW, combined heat into cold components 4.516629 mW. The reservoir carries an equal and opposite signed load.

Cold destination	Kr gas (mW)	Gray rad. (mW)	Total (mW)
Ceramic C1	1.15901	0.20874	1.36775
Ceramic C2	1.44533	0.23389	1.67923
Ceramic C3	1.06469	0.15770	1.22239
Detector	0.22352	0.02375	0.24726
TOTAL	3.89255	0.62408	4.51663

An effective header/TIM/radiator resistance of approximately 4.8334 K/W carries heat to the warm sink. Neither mount pressure nor material lot is an experimental datum. The cavity load is redistributed to native *upper metal-pad* sources in the current model; thermal gradients on exposed bare ceramic faces are not thereby demonstrated.

8 Terminal wires, soldered TO pins, and thermal uncertainty

The TEC power supply must reach the miniature cooler through real wires soldered to the metal-package feedthrough pins. As supplied, these wires may be substantially longer than the *installed* length and are cut to fit the TO header. Only the final internal conductor from the cooler landing to each package pin contributes to the source ceramic-to-pin heat and current path; factory surplus outside the completed joint does not add thermal length to that connection.

The current source-derived layout has two independent, 0.200 mm diameter power leads. Pin 1 is connected to original ceramic face **8** over a 3.451 mm route; pin 9 is connected to original ceramic face **36** over a 4.965 mm route. The V3.4 average-hot-temperature model incorrectly combined both heat loads onto face 36. In the original saved ceramic field the two landings were near 303.94 and 298.39 K, respectively; they therefore need not exchange heat in the same direction with the 300 K header.

At *matched* 0.400 A, 300 K external reservoir, 2 mW detector heat and 100 Pa krypton, the improved three-stage calculations give:

Selected physical hypothesis	Detector (K)	TEC V	Input (mW)
V3.4 legacy lead map	218.833	1.48944	595.776
V3.5 Cu native pad	218.900	1.48917	595.668
V3.5 Ni-like wire	218.915	1.49525	598.100
V3.5 high Cu joint R	212.624	1.51877	607.509

The source-corrected copper-wire model predicts **218.900 K**, 0.067 K above the original V3.4 218.833 K. A same-geometry pure-nickel-like assumption raises that value by **0.015 K**. In contrast, raising the *interstage formed-copper joint* thermal-interface areal resistance from 10^{-6} to an extreme 10^{-4} m^2K/W lowers calculated die temperature to **212.624 K**. This is a deliberately severe interface hypothesis, not measured solder behavior or an endorsement of unreliable joints.

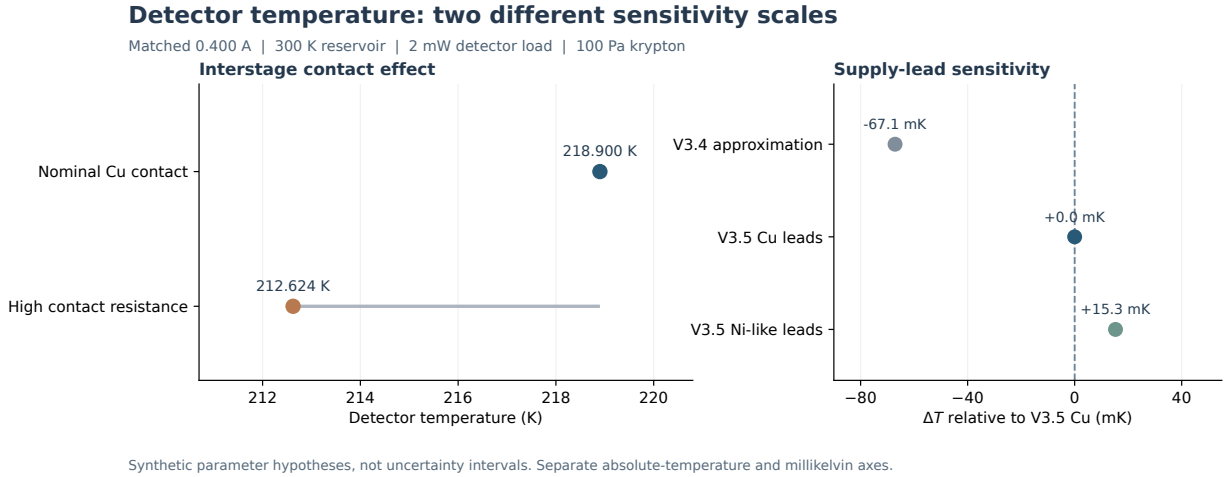


Figure 11: Two explicitly different horizontal scales for accepted full-system simulations at the same 0.400 A, 300 K, 2 mW and 100 Pa condition. Left: 6.276 K sensitivity to an extreme Cu interstage thermal-contact hypothesis. Right: millikelvin departures associated with the corrected terminal-lead model and selected Cu/Ni-like material properties. These are hypothetical design sensitivities, not measured uncertainty intervals.

8.1 Separate source contact heat, lead material, and cut length

For lead i with source internal length L_i, radius r_i, electrical resistivity ρ_i and thermal conductivity k_i, use

$$A_i = \pi r_i^2, \quad R_i = \rho_i L_i / A_i, \quad G_i = k_i A_i / L_i, \quad Q_{i\to c} = G_i(T_{\text{pin}} - T_{c,i}) + \tfrac{1}{2} I^2 R_i.$$

The one-half lead Joule partition is a reduced axial model assumption; the remaining half is rejected at the external pin. All terminal electrical I^2R enters the TEC voltage/power balance, without double counting the externally rejected half as cold-side heat.

Fully solved wire case	Pin 1 heat (mW)	Pin 9 heat (mW)	Wire Joule (mW)
Copper	-11.873	+1.948	0.737
Nickel-like	-2.446	+1.309	3.000

Signed heat is positive *into* the ceramic. With 300 K pin temperatures, pin 1 removes heat from its warmer ceramic while pin 9 imports heat to a cooler landing. Thus calculating both leads from one average hot-side temperature loses genuine local heat-flow information.

Nominal copper properties are $k = 400$ W/(m K), $\rho = 1.72 \times 10^{-8}$ Ωm; the illustrative nickel-like case uses $k = 90$ W/(m K), $\rho = 7.00 \times 10^{-8}$ Ωm. Actual manufacturer supplies should not be identified by color or visual impression: TEC Microsystems and RMT specify *tinned copper* as default, with manufacturer-dependent terminal options. The FeCrAl/Kanthal-like resistance-wire case is included only as a fixed-field counterfactual: at 0.400 A and the same 0.200 mm diameter geometry, its assumed resistance is 0.3884 Ω, generating *62.15 mW* of electrical heat. No such lead alloy has been identified on this physical cooler.

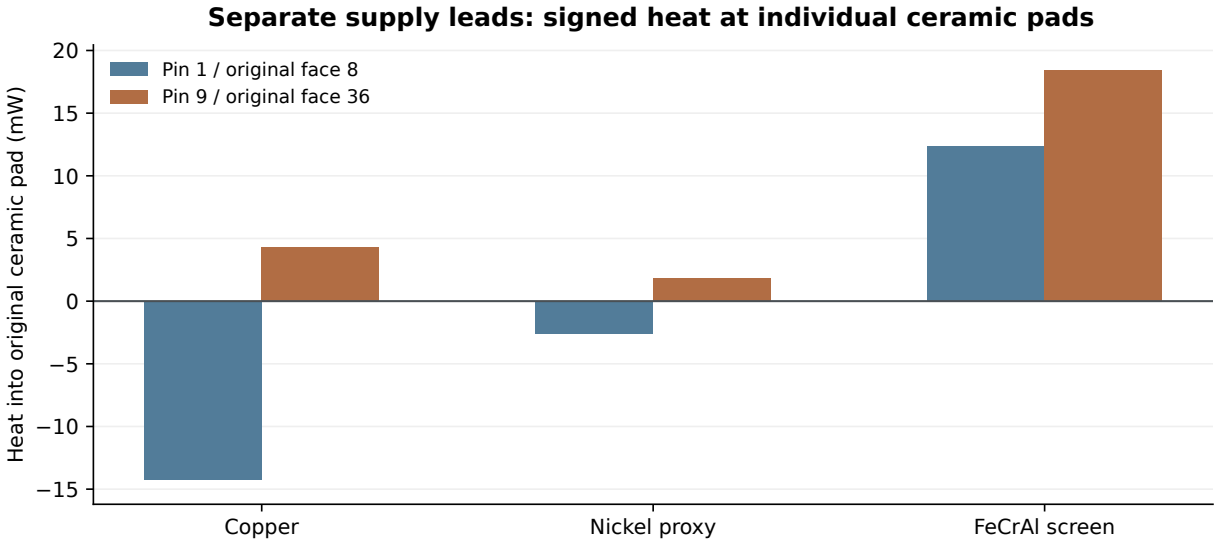



Figure 12: Lead material comparison at one frozen real V3.4 3D ceramic temperature field. Unlike the operating-point table above, this diagnostic is a fixed-field thermal/electrical source screen, not a nonlinear detector-temperature prediction.

8.2 The larger uncertainty: interstage copper and ceramic joint conductance

The three formed stage bridges carry both electrical current and parasitic heat. At each source-defined foil foot of area $A_c = 0.060$ mm^2, the provisional thermal contact conductance is $G_c = A_c / r''_{T,c}$. The nominal $r''_{T,c} = 10^{-6}$ m^{2}K/W is a selected non-measured contact assumption. A higher areal resistance reduces the conductive bypass in this model, but may be impractical or conflict with electrical continuity, solder fatigue, and actual fabrication.

Holding the *original* V3.4 source pad temperatures fixed, the first-pass upper-ceramic copper heat is:

Assumed $r''_{T,c}$ (m^2 K/W)	Upper-plate Cu heat (mW)
1e-07	90.611
1e-06	86.989
1e-05	62.664
1e-04	17.493

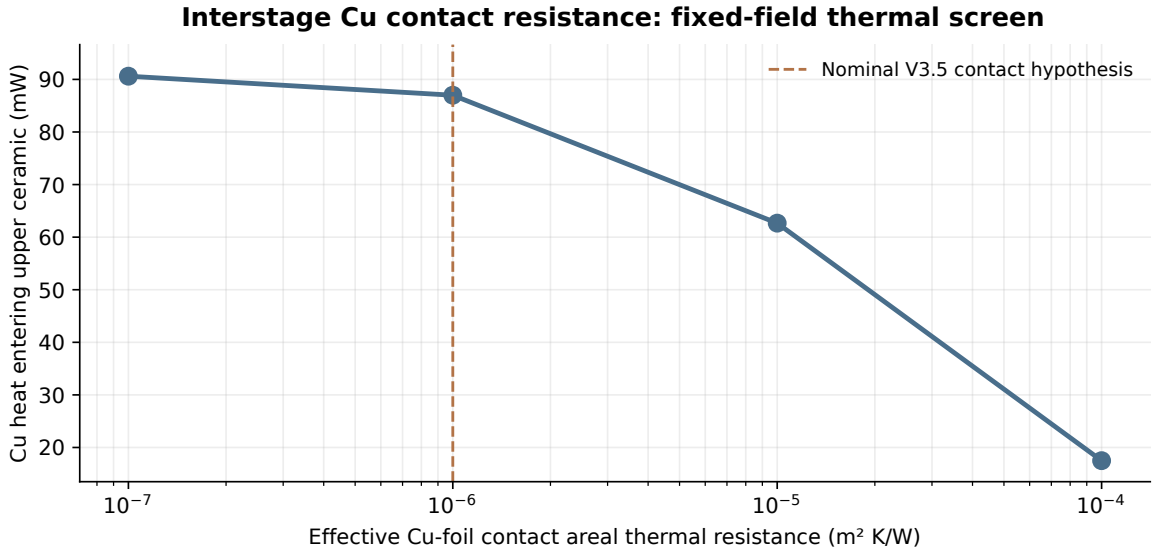

Source V3.4 pad temperatures held fixed; this is NOT a coupled Tdetector sweep.

Figure 13: Source-pad-fixed heat-flux response to copper-foil interface assumptions. These intermediate screening fluxes are deliberately distinct from the three accepted fully coupled V3.5 operating-point results.

In the full-device copper-reference calculation, the upper plate receives **87.173 mW** through the Cu network and its hot stage-3 boundary is **247.359 K**. Under the severe interface hypothesis, those values become **21.697 mW** and **238.856 K**; the detector then equilibrates to 212.624 K. An 0.015 K lead-material change versus a 6.276 K copper-joint sensitivity identifies the next physically important question: *what is the realistic electrical and thermal interface law for the formed Cu foil, its solder feet, and the plated ceramic?*

8.3 Independent verification, limitations, and model use

Each V3.5 case uses the original 88 nonlinear axial P/N legs and four spatial ceramic FEMs with native source face heat. Three matched reference conditions converged with the following independent checks:

Scenario	Max pad update (K)	Stage residual (W)	Global residual (W)
Copper	1.767e-07	1.083e-09	9.376e-10
Nickel-like	2.441e-07	1.410e-09	1.205e-09
High R	1.456e-07	5.633e-11	4.577e-11

The stricter requirements remain below 3×10^{-7} K for the spatial update and 10^{-8} W for independently reconstructed stage and global energy balances. A separate audit re-evaluates both wire conductances/resistances from the unmodified source CAD, all three Cu bridge metal/contact networks (including the third thermal return

port), all stage energy budgets and terminal voltage. The documentation and plots consume only frozen accepted results; no new PDE solve is performed during report generation.

The wire and Cu laws are declared approximations, not measured low-temperature transport, OEM process tolerances or an as-manufactured TO feedthrough temperature solution. Neither the 0.200 mm diameter nor the installed route exactly identifies a vendor assembly. The next physical priority is credible solder/joint thermal resistance, plated-film heat spreading and conductor temperature-dependent properties. Cut-to-size factory terminal leads should be assigned the *installed* ceramic-to-pin length; an off-device surplus must never be treated as extra insulation that improves TEC temperature.

9 Original V3.4 copper-bridge result and its physical explanation

A thermoelectric cooler transfers heat toward its hot side while electrical interconnects must also cross between ceramic stages. The three short formed copper-foil connections in the current cooler provide a real electrical path, but they simultaneously create passive conductive paths that partially undo the cooling. This effect is absent from the original V3.3 prediction. A new V3.4 calculation adds the actual two-foot and three-foot link topology with physically separate ceramic-pad thermal terminals.

At the *same* 0.400 A input, 300 K heat reservoir, 2.00 mW detector heat and 100 Pa krypton setting:

Calculated quantity	V3.3	V3.4 with copper	Change
Detector temperature (K)	210.625214	218.832895	+8.207681
Terminal voltage (V)	1.522462	1.489440	-0.033023
Electrical input (W)	0.608985	0.595776	-0.013209
Sink heat rejection (W)	0.594044	0.579830	-0.014214

Although the predicted electrical power falls, the detector is **8.208 K warmer**. The important loss mechanism is *parasitic stage-to-stage conduction* through the copper, not simply additional resistive power dissipated in the tabs.

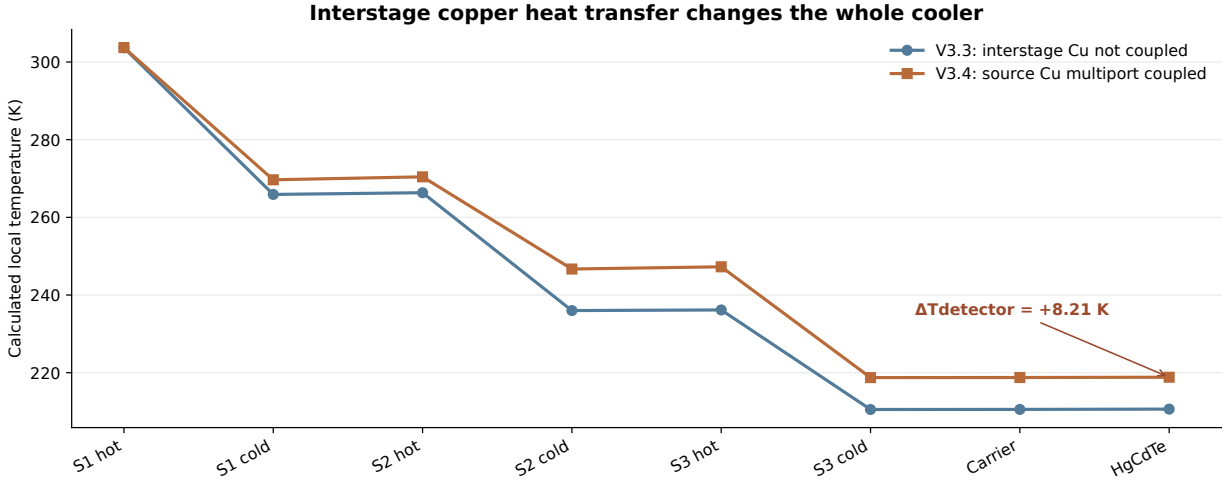


Figure 14: Solved source-ceramic stage and detector temperatures in V3.3 versus V3.4 at matched source assumptions. V3.4 adds a geometry-derived, finite-contact copper heat network; this is a conditional theoretical comparison, not measured or full 3D copper-metal fields.

9.1 Copper heat paths and their thermal consequences

The original CAD includes copper-foil tabs across electrical nets 58 and 80 and a stepped return at net 88. Their original contact sites on the three source ceramic planes are:

$$\text{net58}: \ 38 \to 75, \qquad \text{net80}: \ 79 \to 105, \qquad \text{net88}: \ 36 \to 74 \to 104.$$

The actual bridge foil width/thickness are 0.300/0.030 mm. Heat transfer uses the actual *center-to-center* solder-foot spans, not the full unsupported length of each tab. Net88 has an intermediate supported landing and therefore three separate thermal terminals. The model does not treat that landing as insulated.

For a foil segment i, j and finite contact c, i:

$$G_{ij} = k_{\mathrm{Cu}} A / L_{ij}, \qquad R_{ij} = \rho_{\mathrm{Cu}}(T_{ij}) L_{ij} / A, \qquad G_{c,i} = A_{c,i} / r''_{T,c},$$

where the provisional material laws use $k_{\mathrm{Cu}} = 385\ \mathrm{W/(m\,K)}$, $\rho_{\mathrm{Cu}}(T) = 1.724 \times 10^{-8}[1 + 0.0039(T - 293.15)]\ \Omega\,\mathrm{m}$, $r''_{T,c} = 10^{-6}\ \mathrm{m^2K/W}$, and $r''_{e,c} = 10^{-11}\ \Omega\,\mathrm{m^2}$. These are **selected engineering hypotheses**, not identified foil or solder-lot properties.

The node equation

$$\sum_j G_{ij}(T_i^{\mathrm{foil}} - T_j^{\mathrm{foil}}) + G_{c,i}(T_i^{\mathrm{foil}} - T_i^{\mathrm{ceramic}}) = P_{J,i}$$

sends local conduction and Joule heat to the original 3D ceramic-pad faces. The signed results below are reported as *heat into ceramic*; negative values indicate the foil removes heat:

Foil connection	Hot (mW)	Mid (mW)	Upper (mW)	Joule (mW)
Net 58	-54.594	+55.141	+0.000	0.547
Net 80	+0.000	-40.619	+41.115	0.496
Net 88	-53.881	+9.044	+45.875	1.038
ALL	-108.475	+23.566	+86.989	2.080

The copper network removes approximately 108.5 mW from the hot ceramic while depositing 87.0 mW in the upper ceramic. These are *redistributed* heat flows, not net external heat creation. Their stage total equals the copper circuit's 2.080 mW of electrical Joule dissipation.

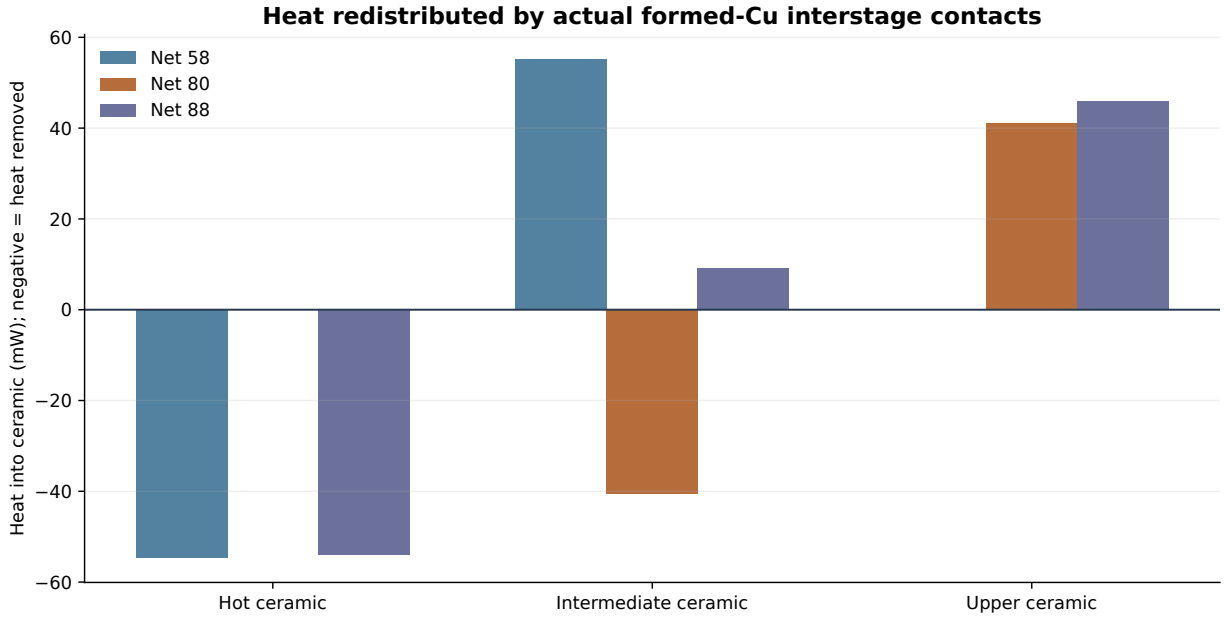


Figure 15: Original-CAD-face copper heat flows from accepted V3.4: individual networks at nets 58, 80 and 88. Positive denotes heat entering ceramic. Net88's middle contact has its own nonzero heat flux.

9.2 Resulting three-stage heat pumping and numerical checks

TEC stage	Number of legs	Q_c (mW)	Q_h (mW)	Voltage (V)
1	58	287.265	709.342	1.055194
2	22	136.178	260.411	0.310583
3	8	4.910	46.991	0.105201

The upper-stage hot boundary increases from 236.16 K (V3.3) to 247.27 K (V3.4). The stage therefore operates across a materially altered thermal environment while still providing approximately 4.910 mW of cold-side heat pumping.

Two earlier fixed-point attempts remain archived as **STOP**; the second passed a coarse pad-temperature threshold but failed the final energy test. The accepted third attempt meets the tighter 3×10^{-7} K temperature-update criterion after **19** outer steps, without changing the source physics:

Independent engineering check	Absolute residual
Final pad update (K)	1.399e-07
Independent stage heat residual (W)	7.959e-10
Global energy residual (W)	6.775e-10
Copper Joule/heat mismatch (W)	8.405e-16

A separately implemented read-only audit reconstructs copper Joule, all three stage heat balances and the hot-reservoir balance from the saved original-face and node data, without rerunning the coupled PDE. The 3D FEM still solves *only the ceramics*; the copper model remains a source-connected 1D heat/electric network with assumed contacts. These residuals establish internal conservation, not an experimental uncertainty interval. The principal next uncertainty is whether actual copper conductivity, foil/joint resistance, plated sheet spreading and geometry tolerances preserve the calculated 8.2 K shift.

10 Current versus cooling performance: an operating envelope (V3.6)

The previous V3.5 model demonstrated a realistic source-connected 0.400 A operating point, but a hardware engineer needs to know how detector temperature and dissipated electrical power change with *TEC drive current*. V3.6 varies only the imposed current and detector heat load, using the *same* 88 source P/N transport legs, 11,791 ceramic tetrahedra, copper-foil interstage links, actual terminal feedthrough connections, krypton cavity and mounting sink assumptions. No material law or geometry was fitted to produce this curve.

At 300 K mounting reservoir, 2.00 mW detector heat and 100 Pa krypton, four independently conserved operating points give:

TEC current (A)	HgCdTe T (K)	Terminal V (V)	Input (W)
0.250	238.568	1.00644	0.25161
0.400	218.900	1.48917	0.59567
0.550	205.992	1.93574	1.06466
0.600	202.777	2.08091	1.24855

The upper-stage hot substrate cools from 260.43 K at 0.25 A to 237.36 K at 0.60 A, while the mounting-side TEC ceramic warms from 301.66 to 307.71 K because it must reject more heat through finite package impedance. The extra electrical cost of a further kelvin of detector cooling rises markedly:

Current step (A)	Cooling gained (K)	Extra input (mW)	Incremental mW/K
0.25–0.40	19.668	344.06	17.49
0.40–0.55	12.908	468.99	36.33
0.55–0.60	3.216	183.89	57.18

No minimum in detector temperature or safe current rating is claimed beyond the four tested conditions; increasing current still improved cooling at the upper tested 0.60 A boundary. The power budget is *module terminal input*, not the entire external power-supply wall consumption.

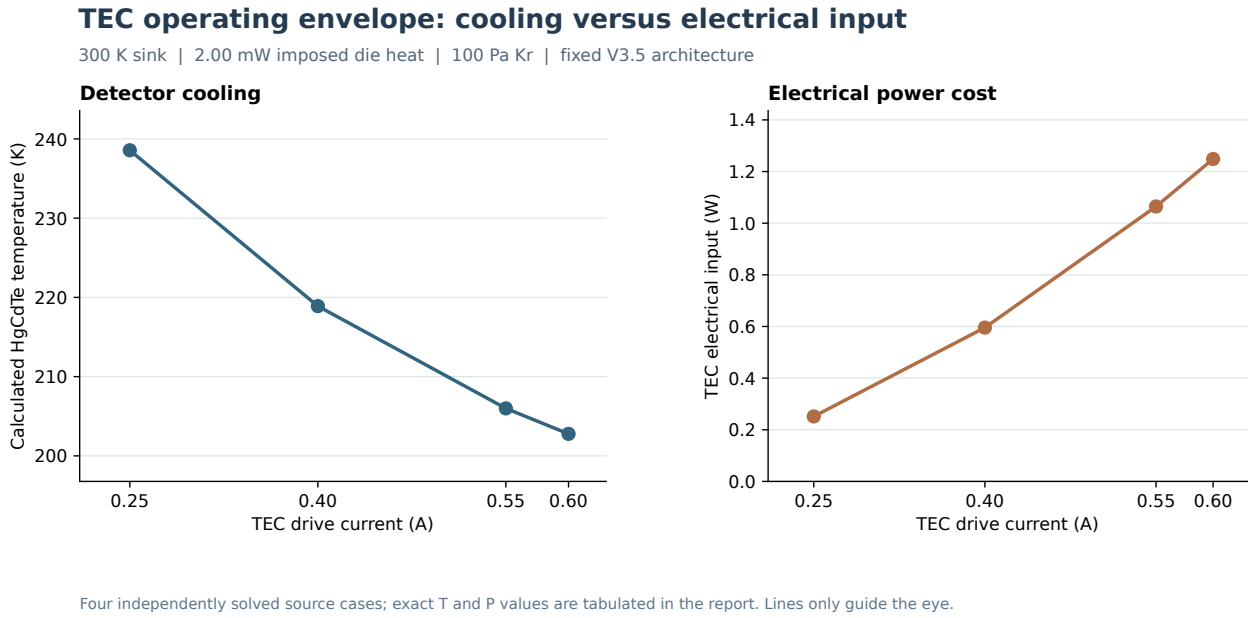


Figure 16: Four full-system source-model cases showing the decrease in detector temperature and increasing electrical input from 0.25 to 0.60 A. The line segments connect individually solved points; they are not a fitted continuous performance or safe-current curve. Other parameters are fixed at the nominal V3.5 physical hypotheses.

10.1 Sensitivity to real detector heating

At fixed 0.400 A, an imposed thermal load is an essential proxy for absorbed photons, bias heating and parasitic package heat before the HgCdTe transport physics is self-consistently integrated. The following points resolve the full TEC–ceramic–package feedback, not a single isolated thermal resistance:

Detector load (mW)	HgCdTe T (K)	TEC V (V)	Input (W)
1.00	218.589	1.48968	0.59587
2.00	218.900	1.48917	0.59567
6.00	220.145	1.48714	0.59485

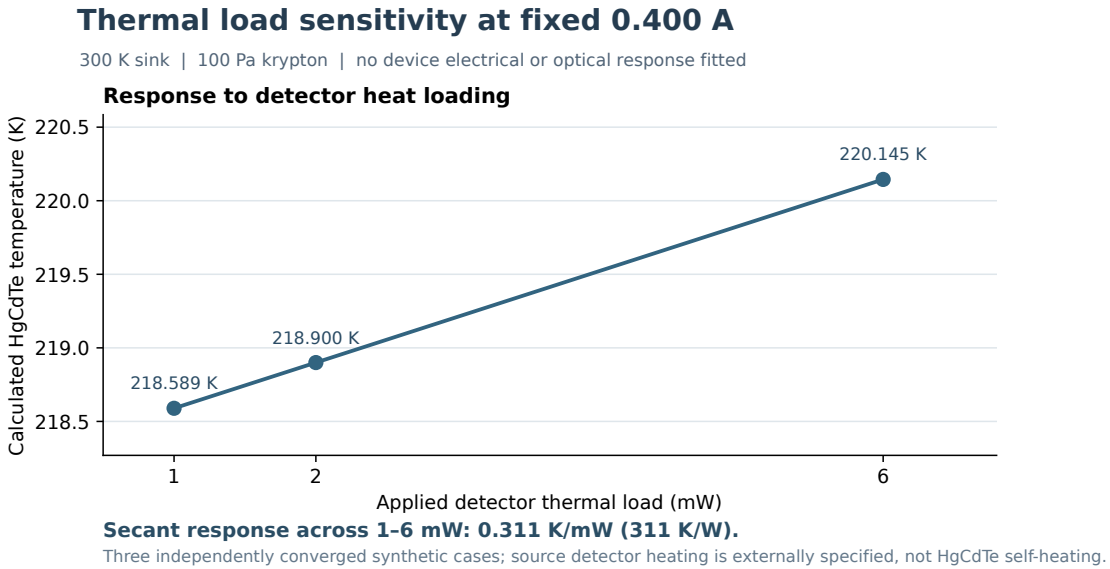


Figure 17: Source-based thermal load sweep at fixed 0.400 A, 300 K sink and 100 Pa krypton. The calculated full-device temperature changes by about 0.311 K per additional milliwatt across the tested 1–6 mW range. The HgCdTe resistance, signal and noise are not yet solved from semiconductor transport.

From 1 to 2 mW the observed secant is 310.734 K/W; from 2 to 6 mW it is 311.184 K/W. This approximately **311 K/W effective device thermal sensitivity** applies to the specified module and drive condition, not a measured intrinsic die thermal resistance. It demonstrates what the platform can now predict about tolerable bias/optical heat and electrical cost *before* an HgCdTe device-transport model supplies that heat self-consistently.

Numerical evidence and limitations. All six cases retain 88 nonlinear leg solutions, original four source ceramic fields and source-to-pin metal face heat accounting; separate no-solve audits recomputed each stage, copper, lead and global balance below 2×10^{-9} W. The unmodified 0.400 A/2.00 mW V3.5 reference is reproduced exactly. Two failed off-reference initializations were preserved and corrected by keeping the frozen 0.4 A heat budget during the first *warm start*; all physical equations and 3×10^{-7} K pad-update gates remain unchanged. These curves remain conditional on selected copper/solder, thermoelectric and mounting properties; no photoconductive gain, infrared detectivity or detector noise is inferred. All original earlier V3.3–V3.5 scientific results follow as independent historical evidence.

11 Thermoelectric transport sensitivity in the current cooler

An operating-temperature prediction depends critically on the actual paired P- and N-type material transport functions. The present synthetic cooler uses the full source-leg count, ceramic spatial fields, and metal heat paths, but its research-specimen $S(T)$, $\rho(T)$, and $k(T)$ curves are not a measured or manufacturer-qualified TEC material pair. It would therefore be premature to quote a narrow error bar on the absolute cold-stage temperature.

To quantify the leverage of these properties, a controlled source-geometry study changed one common P/N property factor at a time, with the original geometry, stage count, foil connections, mounting, gas, and electrical drive held fixed. Each point is a full 88-leg, four-ceramic nonlinear solution, *not* a scaled temperature inferred from an isolated thermocouple. The study applied $I_{\mathrm{TEC}} = 0.400$ A, a 300 K external reservoir, 100 Pa krypton, and a conditional auxiliary detector load obtained from $0.866025^2/R_{\mathrm{die}}(T)$ plus 0.500 mW absorbed heat. The illustrative $R_{\mathrm{die}}(T)$ law in this study is *not* used to infer actual detector performance; the gas study later in this assessment retains a strictly fixed 2.000 mW imposed heat load. Consequently the two experiment families must not be interpreted as identical detector-loading conditions.

P/N property hypothesis	Device mount (K)	Top ceramic (K)	TEC input (W)
All source factors 1.00	218.900	218.807	0.595668
Thermal conductivity ×0.80	207.812	207.716	0.616656
Thermal conductivity ×1.20	227.627	227.536	0.579393
Seebeck coefficient ×0.90	225.833	225.741	0.562663
Seebeck coefficient ×1.10	212.515	212.420	0.631764
Electrical resistivity ×0.80	216.563	216.470	0.523689
Electrical resistivity ×1.20	221.313	221.221	0.668943

Under the *selected, unequal* factor intervals, the total device-mount temperature endpoint spans are 19.815 K for k, 13.318 K for S, and 4.750 K for ρ, respectively. The ranking is an engineering screening result, **not** a statistical sensitivity ranking: the factor ranges are deliberately different, and independently modifying only one material property can be physically incompatible with a real thermoelectric grade.

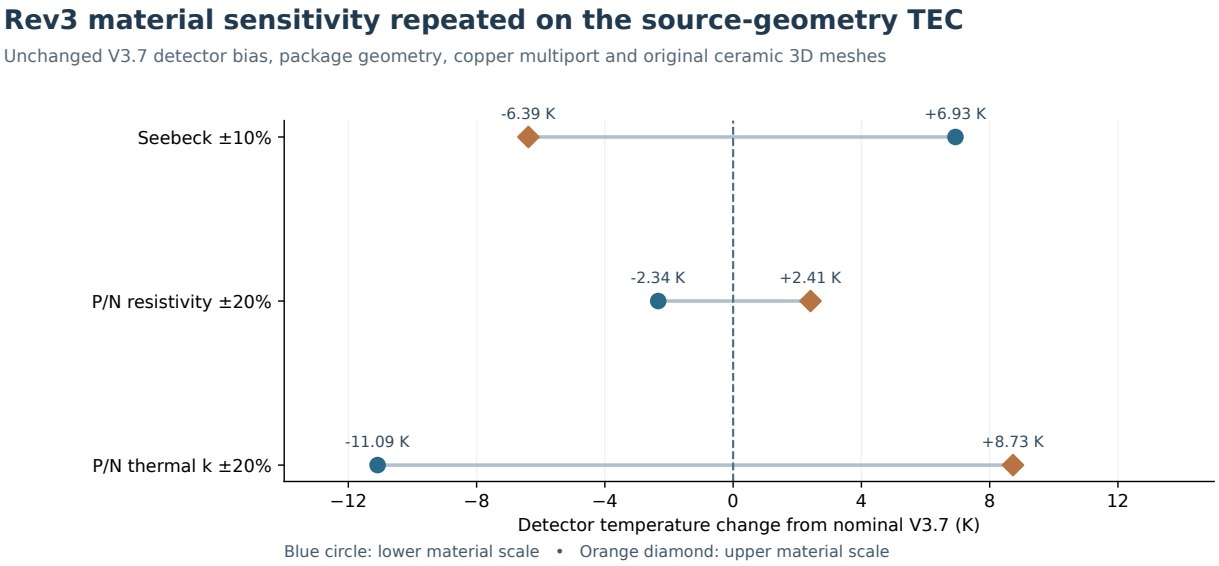


Figure 18. Independently solved P/N transport variations on the current full TEC/TO thermal architecture. Source-property factor ranges are hypotheses, not production tolerances.

12 Package mounting and power required to hold a cold temperature

Even with a fixed 300 K external reservoir, the hot ceramic is not constrained to 300 K. Heat is rejected through an assumed finite package mounting resistance. The nominal current reference uses $R_{\text{external}} = 4.833387$ K/W; the two controlled hypotheses add 5 or 10 K/W *on top of* that reference. The combined source-ceramic and 88-leg transport state was re-solved for each case, with the same stated reference detector thermal-input law and TEC current.

Additional R_{mount} (K/W)	Total R_{external} (K/W)	Device mount T (K)	TEC input (W)
0	4.833387	218.900	0.595668
5	9.833387	220.393	0.604935
10	14.833387	221.856	0.613656

The fixed-current temperature penalties are +1.493 K and +2.956 K for the added 5 and 10 K/W, respectively. Mounting resistance is a package design variable and should not be confused with the cooler's intrinsic material heat lift.

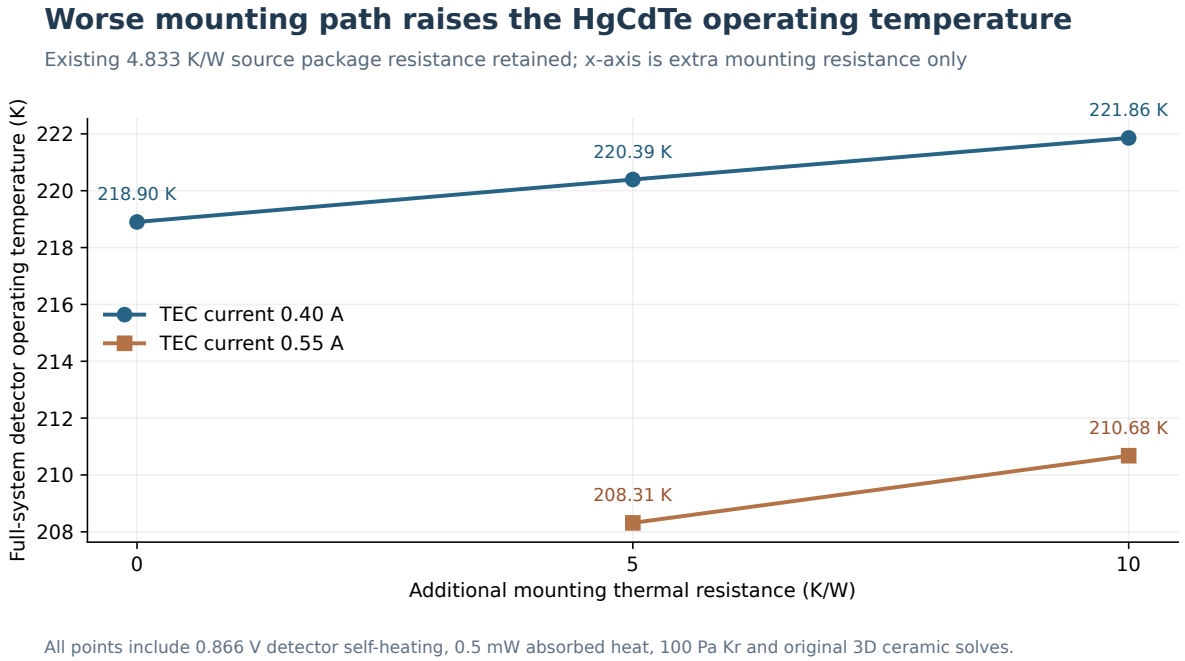


Figure 19. The finite external mounting path changes the nonlinear whole-device temperature distribution; the detector is not assigned a temperature rise algebraically.

A more practical procurement and instrument-design question is how much additional electrical power is required to *recover the same* operating temperature when mounting quality deteriorates. Two new registered, independently audited source solutions were obtained after a bounded current bracket and one numerical correction. These are *actual* full-system solutions, not interpolated electric power values.

Extra R (K/W)	TEC I (A)	Device mount (K)	Input (W)	Power penalty
0	0.400000	218.900024	0.595668	Reference
5	0.415286	218.892717	0.648375	+8.85%
10	0.433174	218.868845	0.712481	+19.61%

The maximum matched-temperature departure is just 0.0312 K. The +10 K/W mounting case demands approximately 116.8 mW more *TEC terminal power* to deliver essentially the same device-platform temperature, under the chosen boundary and material assumptions.

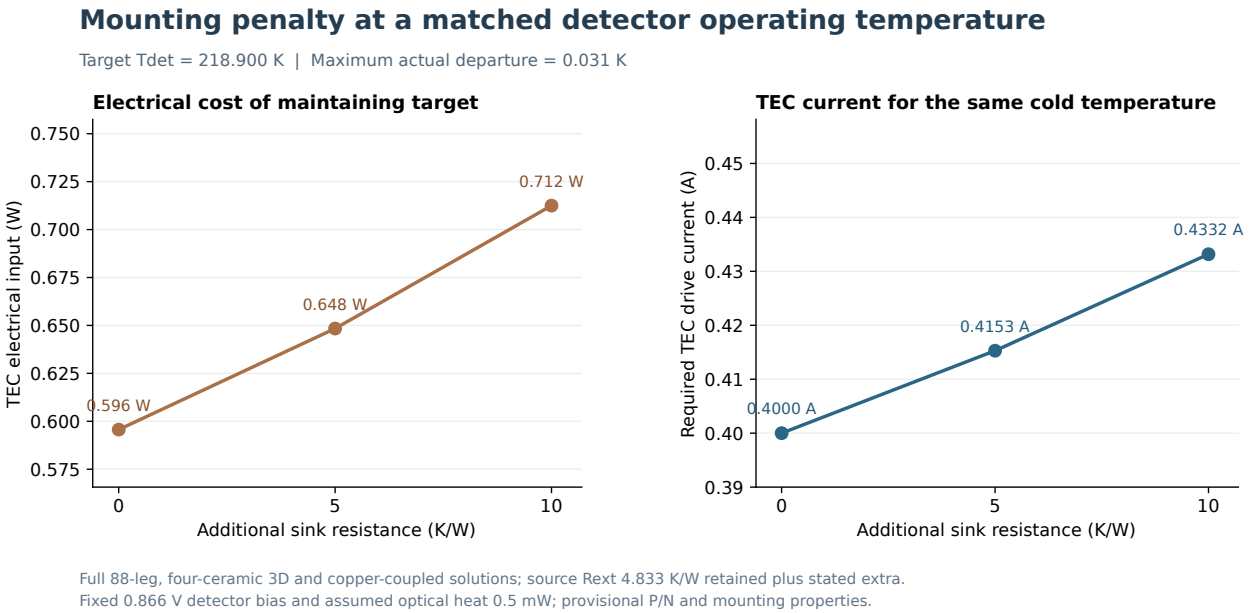


Figure 20. Calculated TEC current and terminal input required to maintain near-equal mounting temperature as external resistance increases. The comparison is not a measured OEM power rating or a global optimum.

12.1 Source-property validity above 300 K

At the reference mounting condition the hot ceramic reaches about 303.8 K; with an additional 10 K/W it reaches about 309.5 K. The P/N research curves have published markers through 300 K only. A separate six-run continuation check held the original 40–300 K curves exactly fixed, while assigning 0, 25, or 100% of the final source-curve tangent beyond 300 K. Across those hypotheses the device temperature spanned only 0.0170 K at nominal mounting and 0.0782 K under the worsened mounting condition. The corresponding total TEC input-power spans were 0.545 and 3.115 mW.

This result helps distinguish a *particular extrapolation parameter* from the much larger unqualified *bulk P/N material grade* question. It does not demonstrate that any of the three continuations is physically correct, nor does it provide a statistical uncertainty interval.

Engineering interpretation. Improving material-grade evidence and the mechanical/thermal TO mounting interface should precede an expensive broad numerical sweep of speculative high-temperature extrapolation functions. For any colder operating point, state current, terminal voltage, heat load, source-temperature coverage, mounting resistance, and the relevant electrical-power budget.

13 Effect of cavity backfill on the TEC top stage

The packaged cooler is also subjected to a potentially substantial heat leak from warm internal surfaces. A controlled eight-case study has now re-solved the *same* source-based TEC with rarefied-to-continuum Kr, Ar and N_2 backfill conditions. To separate cavity transport from detector-specific electronics, these simulations use a fixed $\boxed{Q_{\mathrm{die}} = 2.000\ \mathrm{mW}}$ rather than an electrical-resistance or optical absorption calculation. The principal comparison holds $I_{\mathrm{TEC}} = 0.400$ A and external temperature 300 K.

Backfill	Top ceramic (K)	Device mount (K)	Gas heat (mW)	TEC power (W)
Vacuum, gas off	218.353	218.437	0.000	0.596111
Kr, 100 Pa	218.807	218.900	3.420	0.595668
Kr, 30 kPa	218.845	218.939	3.724	0.595630
Kr, 101.325 kPa	218.845	218.939	3.725	0.595630
Ar, 30 kPa	219.277	219.380	6.966	0.595209
N_2, 30 kPa	219.703	219.815	10.170	0.594792
N_2, 101.325 kPa	219.703	219.815	10.172	0.594792

At the same 30 kPa nominal pressure, nitrogen is 0.8753 K warmer than krypton at the device mounting node and imports an additional 6.446 mW of gas heat. Argon lies between the two. Disabling gas conduction entirely gives a 0.4634 K cooler mounting condition than 100 Pa Kr, while leaving solid and radiative conduction active. No numerical result is assigned to a manufacturer or a known production-gas recipe.

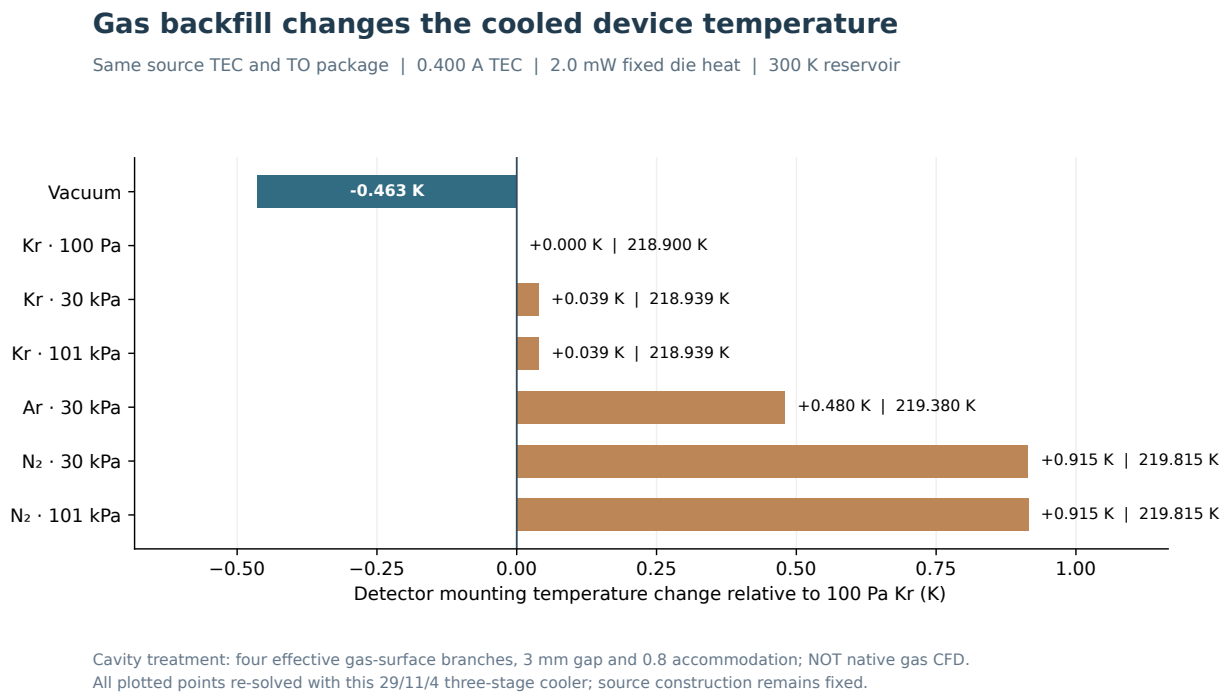


Figure 21. Backfill gas and pressure sensitivity of the device-side mounting temperature. The top TEC ceramic is a distinct lower-temperature node; both are listed in the accompanying table.

14 Gas heat-transfer mechanism and its uncertainty

The current cavity calculation is a *reduced effective-gap* conduction model, not a finite-volume or finite-element solution of gas transport around all 88 exposed thermoelectric legs. For a warm enclosure surface and cold branch i,

$$Q_{\mathrm{gas},i} = G_{\mathrm{gas},i}(T_{\mathrm{env}} - T_i), \qquad G_{\mathrm{gas},i} = \frac{k_{\mathrm{gas}}(\overline{T})A_i}{g + 2\ell_{\mathrm{jump}}(p, \overline{T}, \alpha)}.$$

Here $g = 3$ mm is an *assumed* effective gap, the thermal accommodation coefficient is $\alpha = 0.8$, and the four assigned branch areas are $12.60,\ 8.68,\ 4.76,\ 1.00$ mm^2. Temperature-dependent tabulated Kr, Ar and N_2 conductivities, an Eucken-based viscosity estimate, and a temperature-jump rarefaction correction determine each conductance.

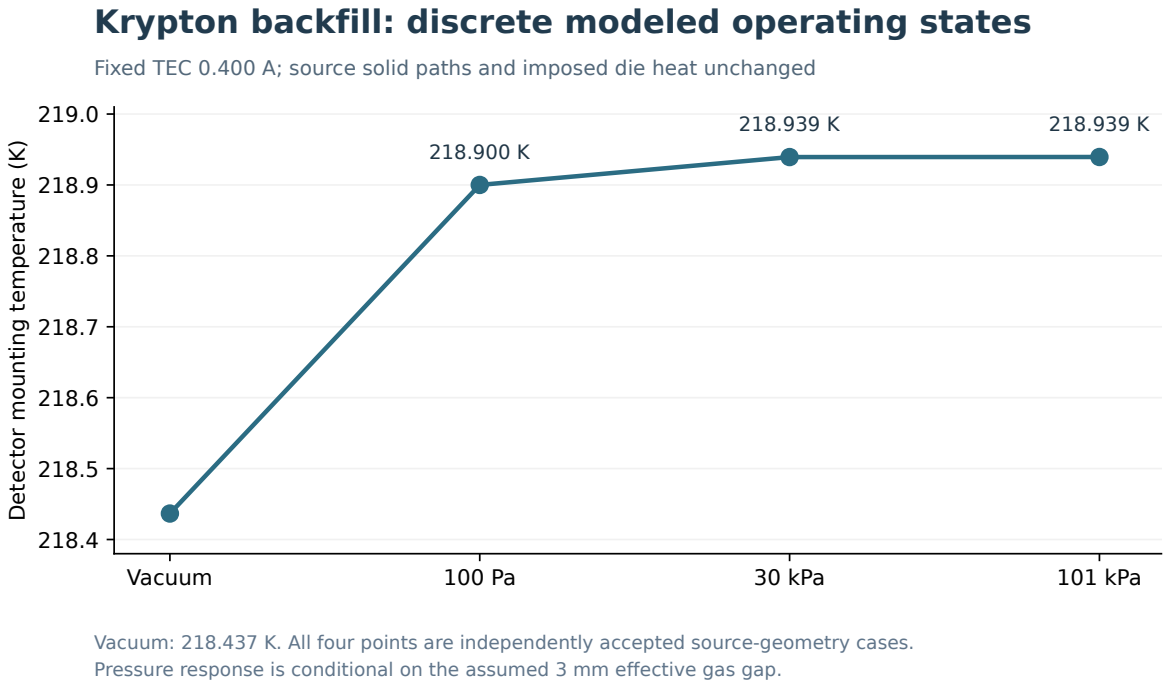


Figure 22. Discrete rarefied-gas/pressure scenarios for Kr in the declared effective-gap model. Connecting lines are guides only, not a measured or independently verified continuum response curve.

Under this particular model, raising Kr pressure from 100 Pa to 30 kPa adds just 0.03930 K to the device temperature; raising it from 30 kPa to 101.325 kPa adds only 0.00010 K. This apparent saturation is largely a consequence of the chosen effective gap, warm-area mapping, and accommodation law. The physically available narrow gaps between 0.40-mm-wide pellets spaced on a 0.58-mm pitch are not represented as independently exposed gas channels. A more faithful cavity model could change both the pressure transition and the gas species ranking. The present data **must not** be used to claim pressure is unimportant in an actual TO package at 100 Pa.

15 Thermal loading, electrical demand, and engineering optimization

Changing TEC drive current is not a gas effect, but it sets the trade-off between cold temperature and electrical power. A separately solved case at $I_{\mathrm{TEC}} = 0.550$ A and 30 kPa Kr, with the same 2 mW die heat and 300 K reservoir, gives

$$T_{\text{top ceramic}} = 205.931 \text{ K}, \quad T_{\mathrm{die}} = 206.032 \text{ K}, \quad P_{\mathrm{TEC}} = 1.06462 \text{ W}.$$

Relative to 0.400 A at 30 kPa Kr this lowers device temperature by 12.908 K while raising terminal input by 0.469 W. Such a trade-off is useful only when a real operating envelope and safe current/voltage limits are independently established.

15.1 Prioritize physical knobs before creating a broad optimization surface

The existing new-architecture studies support the following *engineering experiments*, with their distinction between real geometric variables and screening assumptions preserved.

Construction or operating knob	Existing conditional effect	Next physical qualification
P/N material transport k, S, ρ	19.8, 13.3, 4.75 K source-factor spans	Real matched P/N grade and correlated properties
External mounting resistance	+2.96 K at +10 K/W, fixed 0.4 A	TO contact patch, heat spreader and interface pressure
Formed-Cu foil/joint thermal path	6.276 K for an *extreme* contact hypothesis	Solder/plating area, Cu bending, electrical resistance and current crowding
Gas species, 30 kPa, Kr to N_2	+0.875 K	Native cavity exposure and inter-pellet gap distribution
Detector prescribed load, 1–6 mW	About 1.56 K span at 0.4 A	Define die/power budget, attach and carrier conductivity
TEC drive current, 0.4 to 0.55 A at 30 kPa Kr	−12.908 K at +0.469 W	Rated current, lifetime and allowable package dissipation

A physically credible optimization of top-stage temperature should vary the pellet area A, height L, stage placement, current and source-grounded package thermal boundaries *jointly*, subject to specified electrical and mechanical constraints:

$$\min T_{\mathrm{top}}(I, A, L, Q_{\mathrm{die}}, T_{\mathrm{sink}}, R_{\mathrm{mount}}, p_{\mathrm{gas}}, \ldots).$$

A transport-only A, L sweep can isolate competing $R_{\mathrm{leg}} \sim \rho L/A$ and $K_{\mathrm{leg}} \sim kA/L$ effects. It cannot by itself be called a fabricated pellet-geometry variant: changing width or height also changes solder pad area, foil contact location, ceramic spacing, interleg gas gaps and insulation clearance.

15.2 Evidence quality and outstanding physical work

All eight gas cases and the material/mounting studies archive original 88-leg nonlinear states, source native four-ceramic 3D nodal fields, input registrations and independent audits. The eight gas cases all pass direct independently reconstructed gas conductance, source Cu/lead Joule, three-stage and global heat balances; their maximum global energy residual is below 2×10^{-9} W. This demonstrates conservation *of the declared model*. It does not identify actual P/N pellet batches, solder thermal impedances, or exposed package gas paths, nor does it establish a full multi-material 430-domain current and thermal PDE.

The next high-value releases should therefore be: a source-grounded pellet width/height feasibility screen, a native exposed-surface cavity network, and a quantified TO mounting/contact construction study. For each, report *top ceramic temperature*, die mounting temperature, thermoelectric input, package rejected heat, and individual component heat-flow budgets. Semiconductor signal/noise and photodetection belong to the separate specialist model; they are not necessary to answer these package thermal-design questions.

16 Interstage copper, solder interfaces, and the TO mounting path (V3.12)

The interstage metal paths are one of the largest existing construction sensitivities in this source-geometry cooler. At the accepted 0.400 A, 300 K reservoir, 100 Pa krypton, and 2.000 mW imposed device heat reference, the three formed-copper networks 58, 80, and stepped three-foot return 88 are conservative electrical/thermal multiports. Their total signed heat delivered to the hot, middle, and upper ceramics is −110.578, +25.487, and +87.173 mW, respectively. The sum is +2.082 mW, equal to the source Cu Joule generation; the 87.173 mW entering the upper ceramic is a *redistributed* parasitic heat flow, not 87.173 mW of extra electric input.

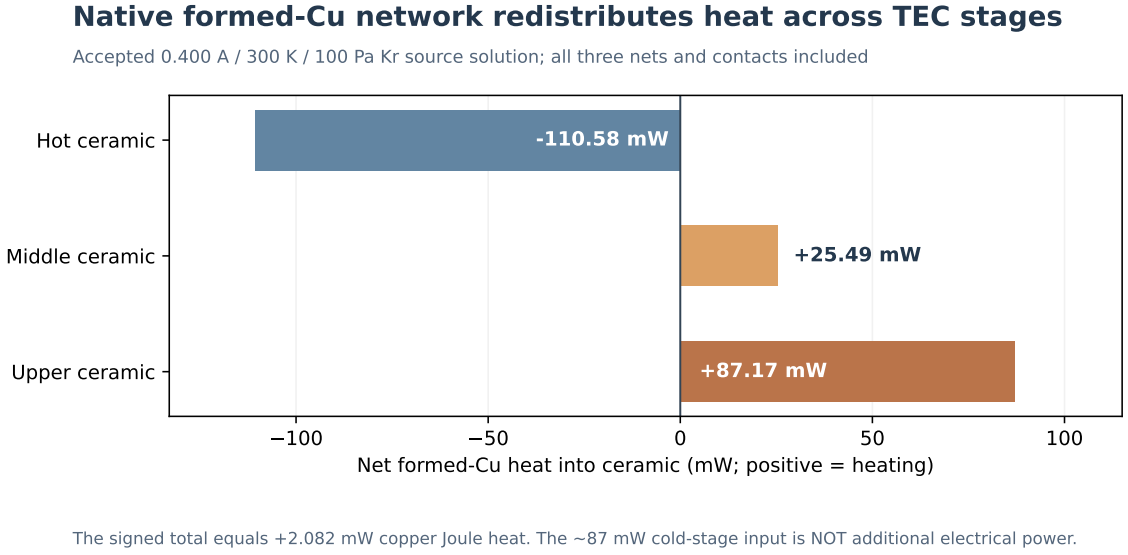


Figure 23: Original accepted source-geometry V3.5 native copper multiport heat balance. Negative signed values remove heat from the named ceramic. These three components cannot be added as if they were independent heat sources, and the values are not new fitted operating points.

The upper stage receives +41.058 mW from net 80 and +46.116 mW from the upper foot of the stepped return net 88. In contrast, the four effective cavity gas branches transfer a total +3.420 mW from 100 Pa Kr and the cavity radiation approximation adds +0.563 mW, to *several different thermal nodes*. The two copper supply leads exchange −11.873 and +1.948 mW at separate hotter ceramic landings. These are source-specific heat-port values, not a directly additive thermal-load budget for the detector cold tip.

16.1 Corrected BiSn foil-foot bondline and contact resistance

Each formed foil has a CAD section 0.300×0.030 mm and each source joining foot has contact area $A_c = 0.060$ mm^2. Its existing effective thermal areal resistance is the *assumed* $r''_c = 10^{-6}$ m^{2}K/W. For an ideal, completely wetted single solder layer, the bulk-only limit is

$$r''_{\text{bulk}} = \frac{t}{k_s}, \qquad R_{\text{foot,bulk}} = \frac{t}{k_s A_c}.$$

The actual formed-foil source joint is **Bi57Sn43**, not the Sn95Sb5 used at the different P/N leg interfaces. Indium Corporation lists $k_s = 19$ W/(mK) at 85 °C for the adjacent eutectic Bi58Sn42 (Indalloy 281), used here only as an *alloy-family proxy at a different temperature*, and 61 W/(m K) for counterfactual SAC305. These are bulk-material reference values, *not* qualified low-temperature interface data for this synthetic source. The nominal model resistance equals the ideal BiSn-family proxy bulk resistance of a **19 micrometre** bondline. By contrast, the earlier extreme 10^{-4} m^{2}K/W contact hypothesis is bulk-equivalent to **1.9 mm** of this solder and should not be mistaken for a realistic intact solder-foot tolerance. Real wetting, intermetallic layers, plated-film lateral spreading, and interface conditions remain unresolved. The SAC305 comparison is *counterfactual*, not a claim about the source solder composition.

Ideal-bulk solder hypothesis	Bondline (μm)	r'' (10^{-6} m^{2}K/W)	Upper Cu (mW)	ΔQ (mW)
BiSn proxy, $k = 19$	20	1.053	86.973	-0.201
BiSn proxy, $k = 19$	25	1.316	85.985	-1.189
BiSn proxy, $k = 19$	35	1.842	84.079	-3.094
SAC305 (alternative), $k = 61$	20	0.328	89.825	+2.651
SAC305 (alternative), $k = 61$	35	0.574	88.835	+1.662

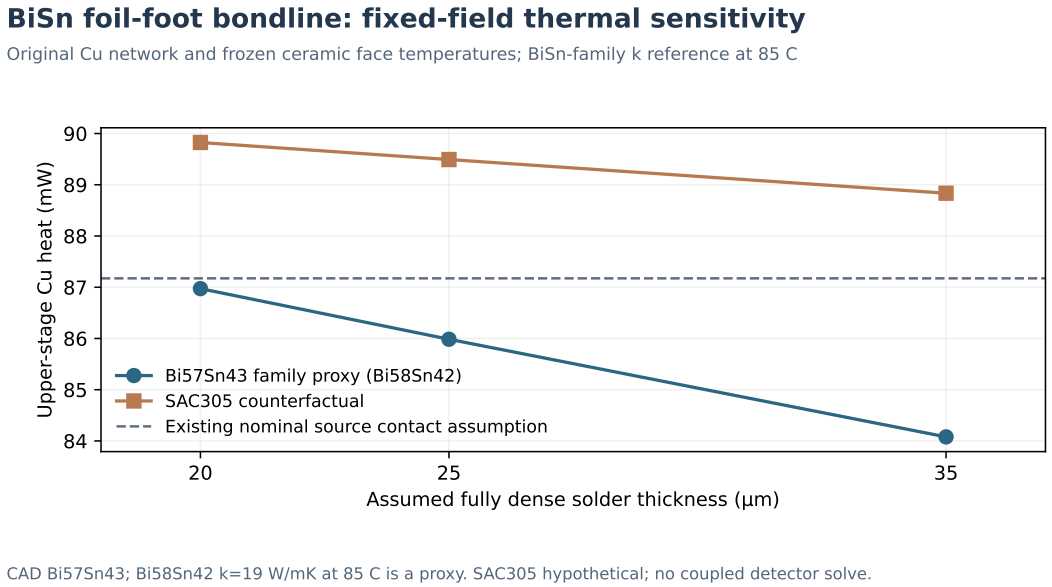


Figure 24: Source-native ceramic face temperatures are frozen while only the ideal bulk-only solder contact conductance varies. This is a conditional, fixed-field copper-flux screen, not a full-system detector-temperature sweep. All heat inputs are reconstructed from saved data without new FEM solves.

Under these selected hypotheses, 20–35 micrometre BiSn-family proxy bonds change the source upper-stage Cu heat from 86.973 to 84.079 mW at fixed face temperatures, a 2.894 mW span. The original CAD joining foot is 20 micrometres thick; these larger values are a thickness experiment, not the as-built design. In comparison, the prior 100-fold hypothetical contact resistance produces a 6.276 K *fully coupled* detector-temperature decrease; the latter is an extreme interface-isolation experiment, *not* a manufacturable cooler improvement. Net 58 has source-segment thermal conductance 0.002087 W/K (about 479 K/W along the foil) versus 16.67 K/W per nominal foot, illustrating why ideal solder thickness alone is unlikely to eliminate the formed-Cu bypass.

16.2 Matched-temperature TO mounting penalty and engineering priorities

An independently accepted V3.8 finite-mount experiment, using its *own provisional temperature-dependent detector Joule load*, increased external mounting resistance by 5 and 10 K/W *in addition to* the existing 4.8334 K/W source package resistance. At fixed 0.400 A this raised the detector temperature from 218.900 K to 220.393 and 221.856 K. Bringing the detector back to within 0.032 K of the reference required currents of approximately 0.4153 and 0.4332 A and increased TEC terminal input from 0.595668 W to 0.648375 (+8.85%) and 0.712481 W (+19.61%). These mounting results must not be conflated with the fixed-2 mW solder screen.

The next physical qualification should therefore investigate **(1)** actual copper-foil, landed solder, and plated-film three-dimensional spreading with electrical continuity; **(2)** the installed TO mounting/contact geometry and thermal impedance; and **(3)** narrow exposed cavity-gas paths before geometry-consistent pellet-height and cross-section design optimization. The material and contact parameter intervals are test hypotheses rather than measured statistical tolerance distributions. Full source/audit hashes, the fixed-face solver, and original figures are available in the dedicated V3.12 technical record and its machine-readable result manifest.[1]

[1]Technical record: `docs/V3_12_COPPER_JOINT_MOUNTING_EVIDENCE_20261109.md`. Bulk properties: Indium Corporation, Solder Thermal Interface Materials (Bi58Sn42 Indalloy 281, 85 °C analog) and Indalloy 256 SAC305 preform data.

17 Native foil-port qualification and the remaining 3D electrical gate (V3.13)

The next engineering step is not a blind global remesh. For the three-foot source return net88, the existing 1D/effective-contact thermal multiport can be reduced to an explicit three-port response for ceramic faces 36, 74 and 104. Using the current accepted source geometry and independently archived native ceramic-face temperatures, the conductance law for heat *into* the interstage conductor is

$$\mathbf{Q}_{\text{foil}} = \mathbf{G}\mathbf{T}, \quad \frac{\mathbf{G}}{10^{-3}\,\text{W/K}} = \begin{bmatrix} 1.952853 & -1.892256 & -0.060596 \\ -1.892256 & 3.695323 & -1.803067 \\ -0.060596 & -1.803067 & 1.863663 \end{bmatrix}.$$

The exact assembled matrix is symmetric and positive semidefinite, has zero row/column sum to numerical precision, and reconstructs accepted 0.400 A copper interface heat to below 10^{-11} W. This is a verified *reduced source-geometry port operator*, **not a 3D FEM measurement of foil/spreading conductance**. The actual thermally active middle landing is retained.

Electrical topology requiring prospective correction. In the historical source-registered 3D net88/lead9 coupon, the middle foil foot (‘tab_joint5‘, source Bi57Sn43) is an electrical dead end. The reduced V3.4–V3.12 copper law instead includes all three foil-foot electrical contacts in the through-current resistance and allocates current-driven contact heat to all three. At 0.400 A the middle-foot term corresponds to $R_c = 0.000166667\ \Omega$ and $P_J = 0.026667$ mW. Omitting this dead-end electrical term in a prospective new source model must not remove the real middle *thermal* contact. Correcting an isolated series coefficient does not establish a new coupled detector temperature or full-module voltage.

Historical 3D stop condition. The original complete 12-region, 28,691-TET4 net88/lead9 physical coupon’s fine P1 solution had a worst independent raw one-sided interfacial current-cut mismatch of **85.63%**; the subsequent same-mesh P2 mathematical refinement reduced that mismatch to **8.10%**, but still failed 11 of 16 mandatory cuts against the original **0.1%** criterion. The P2 electric potential also undershot zero by about 9.15×10^{-7} V, outside the 10^{-8} V bound. Its excellent terminal power conservation does not override those failures. Thus **electrical Gate B remains FAIL/STOP, and physical thermal Gate C and coupled Joule Gate D remain NOT RUN**. The bounded next attempt should qualify the current field and interface ownership first, then compare a genuinely spatial thermal coupon against the matrix above. The archived source mesh, unsuccessful results and gate thresholds remain unchanged.

V3.12 correction notice. Formed-foil feet are *Bi57Sn43*, not the Sn95Sb5 solder used at other TEC P/N junctions. The preceding contact screen is corrected using a *nearby Bi58Sn42 85 °C conductivity as an unvalidated family analog*; the source alloy’s low-temperature transport is not qualified. Neither correction changes an accepted full-device operating state. Full source hashes, gate records and implementation notes are in `docs/V3_13_NATIVE_FOIL_PORT_AND_3D_GATE_20261109.md`.

18 Native electrical-contact spatial resolution: failed P2 qualification (V3.14)

The next physical coupon experiment tests whether smaller source-CAD elements materially reduce the original 3D lead9/solder contact-gradient mismatch. The same native net88/lead9 12-region BREP, 11 physical contacts, P87-to-pin9 electrical cuts, assumed NOM material tensors and $r_e'' = 10^{-11}\ \Omega\,\mathrm{m}^2$ were retained. Only the Gmsh maximum element size changed, from 0.045 to 0.035 mm. No new physical contact law or geometry was fitted, and the middle Bi57Sn43 foil-foot remains a *thermal* landing but an electrical dead-end. The one preregistered, bounded P2 test used 47,277 TET4 geometric cells and 92,495 separate-material quadratic potential DOFs. An independent no-solve saved-field auditor later reconstructed both one-sided interface and terminal current integrals on all 2,178 registered contact triangles, agreeing with the saved producer at 4.52×10^{-13} relative. The three internal-plane cuts remain producer-only evidence.

Registered observable	Prior P2	New finer P2	Gate
Original geometric tetrahedra	28,691	47,277	Same BREP
P2 scalar DOFs	58,993	92,495	Same physical regions
Worst raw-current mismatch	8.0993%	**7.0193%**	**FAIL** ($\leq 0.1\%$)
Current cuts passing	5/16	**5/16**	**FAIL** (16/16)
Minimum electric potential	-9.15×10^{-7} V	-5.56×10^{-7} V	**FAIL** ($\geq -10^{-8}$ V)
Unit-excitation coupon resistance	0.0295489 Ω	0.0295302 Ω	Conditional
Relative IV–dissipation mismatch	6.34×10^{-9}	1.43×10^{-10}	PASS ($\leq 0.5\%$)

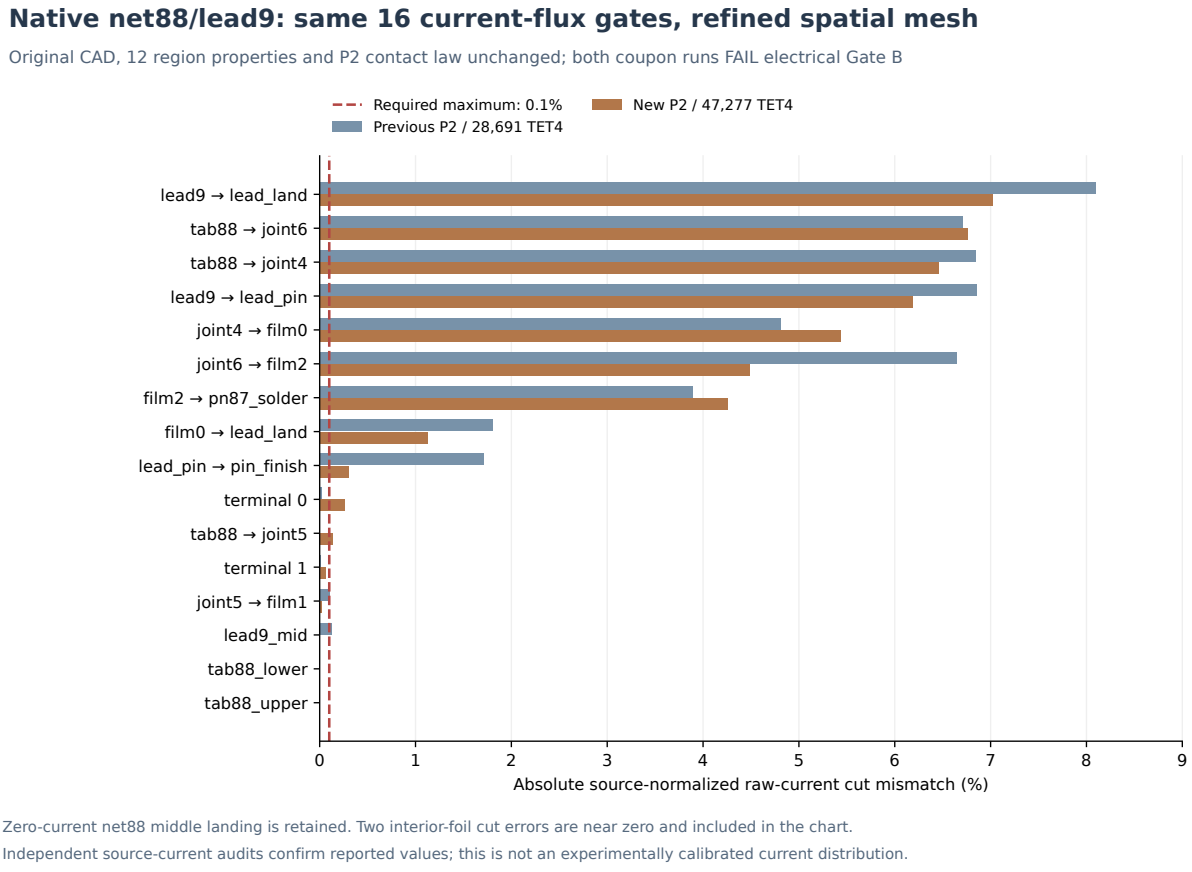


Figure 25: All sixteen original source-identified raw-gradient electrical current-cut mismatches, using the same physical interfaces and criterion before and after the single geometric mesh-size reduction. Eleven of sixteen still fail. Weak/contact-reaction fluxes do not replace these independently verified one-sided element-gradient fluxes. This is not experimental validation or a full-TEC electrical resistance measurement.

The worst mismatch decreased about 13.33% relative, yet remains **70.19 times above the release threshold**. Nine individual raw-cut errors improved, seven worsened. The finer source mesh also has a remaining 0.989% volume deficit compared with the registered CAD. More importantly, even though the discretized terminal power balance remains excellent, the source contact/lead9 P2 normal-current gradients are not locally accurate to the original standard.

Qualification and decision. The original 3D electrical Gate B remains **FAIL/STOP**; thermal Gate C and spatial Joule Gate D remain **NOT RUN**. No new detector operating point, current rating, copper heat-spreading coefficient or manufacturable geometry optimum follows from this failed local coupon. A future approach would need a new separately preregistered source-contact perimeter discretization/field formulation with independent interface and cut-port verification, not an unsupervised mesh sweep or altered acceptance criteria. The full diagnostic and source hashes are archived in `docs/V3_14_NATIVE_NET88_P2_REFINEMENT_20261109.md`.

19 Lead9 contact-perimeter field attribution (V3.15)

The source-native 3D lead9/solder electrical contacts remain the limiting raw-current-gradient problem even after the separate V3.14 fine-mesh P2 solve. This study uses *only the two archived P2 fields*, their unchanged original 12-region source geometry, and the existing 11 finite-contact ownership rules. No new PDE is assembled or solved. On each physical contact facet the two raw currents come from $-\boldsymbol{\sigma}\nabla V$, whereas the distinct finite-contact-law current is evaluated from $(V_1 - V_2)/r_e''$ using the saved material-separated quadratic traces. The original contact areal resistivity hypothesis is $r_e'' = 10^{-11}$ $\Omega\mathrm{m}^2$, not an OEM measurement.

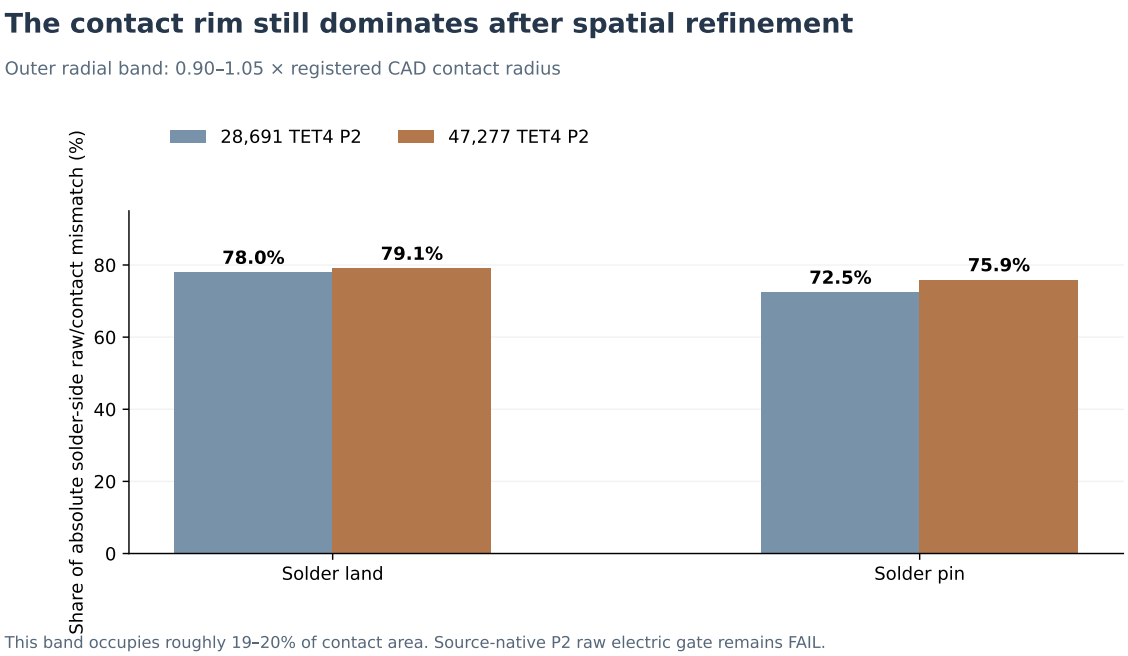


Figure 26: Source-native radial TRI3 centroid study of the solder-side absolute raw-gradient/contact-law mismatch. The annular diagnostic bin $0.90 \le r/r_{\mathrm{CAD}} < 1.05$ covers about one-fifth of each registered contact surface. The ordinate is the *fraction of that contact's absolute total mismatch* associated with that radial bin, not the local current or a prediction of a newly modified contact.

For lead9 to the BiSn land, this outer band contains **78.01%** of the earlier P2 solder-side absolute mismatch and **79.11%** after refinement; for lead9 to the InSn pin joint the corresponding fractions are **72.47%** and **75.94%**. The registered rim area fractions remain between 19.2% and 20.4%. Meanwhile the full-interface raw-current cut errors reduce from 8.0993% to 7.0193% (land) and 6.8529% to 6.1887% (pin), still greatly exceeding the unchanged **0.1%** release limit.

Frozen-field negative control. A counterfactual that zeroes *all of the existing rim's signed raw-minus-contact-law bias* but leaves the interior solved field unchanged would still yield worst signed-side errors of **2.123%** at the land and **1.304%** at the pin for the finer P2 solution. The counterfactual is not a PDE solution or error bound for a newly solved field, but establishes that removing the currently observed rim discrepancy *alone* is not sufficient. The original physical electrical Gate B remains **FAIL/STOP**; thermal Gate C and coupled Joule Gate D remain **NOT RUN**. Future work should favor a separately registered contact-edge/interface-formulation study with original

raw-gradient comparisons rather than a generic mesh-size sweep. The complete numerical decomposition and source hashes are documented in `docs/V3_15_LEAD9_CONTACT_PERIMETER_FIELD_DIAGNOSIS_20261110.md`.

20 Independent finite-contact method benchmark and sharp-edge stress test (V3.16)

The V3.14/V3.15 studies show that detailed source-native 3D current-gradient/contact-law discrepancies persist near the physical solder-contact perimeter, despite low global power and algebraic residuals. Before further attempts on the full lead9/net88 coupon, a separate *two-dimensional nondimensional* method benchmark was solved with a manufactured exact potential. It is not a substitute for or calibration of the actual three-stage TEC source geometry.

Consider two regions $\Omega_- = (-1,0)\times(0,1)$, $\Omega_+ = (0,1)\times(0,1)$ with constant conductivities $\sigma_- = 1$, $\sigma_+ = 3$, contact resistivity $r_c = 0.2$, and linearly varying prescribed current $Q(y) = 1 + 0.35(y - 0.5)$. For a full-height imperfect electrical contact, the exact harmonic fields are

$$V_\pm(x,y) = -\frac{Q(y)x}{\sigma_\pm} + 0.2y \pm \frac{r_c Q(y)}{2}, \qquad -\sigma_-\partial_x V_- = -\sigma_+\partial_x V_+ = \frac{V_- - V_+}{r_c} = Q(y).$$

The variational interface bilinear form is $\int_\Gamma r_c^{-1}(V_- - V_+)(w_- - w_+)\,d\Gamma$. Independent raw current gradients were integrated on both material sides; no contact-reaction current was substituted for those gradients. Because the exact solution is bilinear and therefore representable by quadratic triangles, this smooth test yields raw-to-contact integrated relative errors $\mathcal{O}(10^{-15})$ on 578- and 2,178-DOF discretizations, with separate conserved bulk and interface dissipation.

A deliberately separate contact-tip stress experiment retains the original outside boundary forcing but restricts the interface to $0.25 \le y \le 0.75$, insulating the two remaining central boundary segments. The preceding polynomial is no longer an exact solution. The patch test therefore measures *raw-versus-contact internal disagreement*, not physical or mathematical error versus a qualified exact finite-tip field.

2D subdivision count	Scalar P2 DOFs	Left raw/contact	Right raw/contact
8	578	11.87%	12.58%
16	2,178	6.44%	6.81%
24	4,802	4.39%	4.64%

The smooth manufactured benchmark verifies the standard symmetric P2 weak-contact operator in an exactly representable case. The strong tip-case discrepancy, despite consistent power closure, shows why source-net88 contact-edge verification requires additional field-resolved numerical work. It does *not* establish a singularity mechanism, certify a new discretization, qualify the existing 3D metal model, or provide a new detector temperature. The original 3D electrical Gate B remains **FAIL/STOP**; thermal Gate C and Joule Gate D remain **NOT RUN**. Full benchmark code, exact boundary conditions, error norms, and SHA-traceable results are preserved in `docs/V3_16_INDEPENDENT_CONTACT_METHOD_BENCHMARK_20261110.md`.

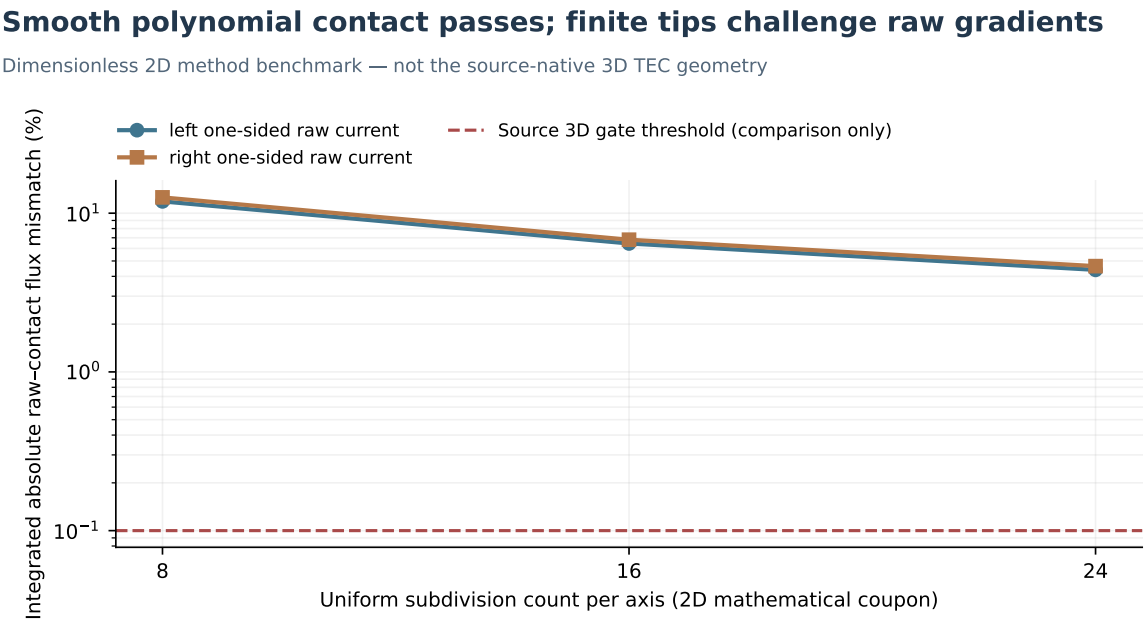


Figure 27: Two-dimensional dimensionless finite-contact method stress case, with sharply terminated contact region and no exact analytic patch solution. The errors are integrated absolute one-sided raw-current versus weak-contact-law discrepancies, *not* the original source-native signed 3D cut-error norm. The displayed 0.1% source gate is comparative only.

21 Pellet size and electrical power: a frozen-boundary transport screen

The engineering target is a lower detector-mount temperature under a specified electrical-power constraint. A source-derived screen changes the common axial P/N pellet dimensions while holding the 88 individually resolved source-pad temperatures, solder/foil electrical resistance, ceramic fields, heat-sink and cavity source state fixed. This is a **transport-only diagnostic**: the source geometry and thermal balances are not rebuilt or re-solved. It does not predict a new cold-ceramic or detector temperature.

The reference is the independently audited 29/11/4-couple, 0.400 A state with a 300 K reservoir, 100 Pa krypton and 2 mW imposed die heat. Source mean hot-ceramic, top-ceramic and mounting temperatures are respectively 303.7623, 218.8067 and 218.9000 K. These are fixed inputs to all variants; individual leg endpoints retain their native-pad differences. The reference electrical input is 0.595668 W. The 3 mm effective gas gap, gray exchange and source Cu multiport are frozen; gas and metal transport are not recalculated for the modified footprints. The frozen return-network resistance retains the previously identified intermediate-contact bookkeeping limitation; the historical net88 3D electrical failure remains unqualified.

For the common width w and height L, let $A = w^2$ and $g = (A/L)/(A_0/L_0)$, with $A_0 = 0.16\,\mathrm{mm}^2$ and $L_0 = 0.50\,\mathrm{mm}$. The independently solved axial constitutive equations retain Peltier, Thomson, Fourier and Joule behavior: $J = \pm I/A$, $q = STJ - k\,dT/dz$, $dq/dz = J\,dV/dz$, $dV/dz = \rho J + S\,dT/dz$, and each leg is checked using $Q_h - Q_c = IV$. The separate P/N research specimens cover 40–300 K; all cases use the unmeasured quarter-slope continuation above 300 K. Constant-property analytic controls check the signs and voltage; the full 430-domain P/N and copper current fields remain unsolved.

21.1 Registered width and height cases

At fixed 0.58 mm pitch the tested widths 0.36/0.40/0.44 mm imply nominal leg-edge separations 0.22/0.18/0.14 mm. A positive leg spacing alone is not a pad or manufacturing qualification. The 0.44 mm width exceeds the 0.40 mm nominal source landing, while a 0.36 mm leg changes the actual solder contact area. Changing height by 0.10 mm also moves a leg endpoint relative to its unchanged ceramic, solder and foil. A physical variant must regenerate those interfaces, copper-tab geometry, source thermal mapping and exposed gas surfaces before any geometry-consistent claim.

Case	Width (mm)	Height (mm)	g	P at 0.4 A (W)	$Q_{c,3}$ at 0.4 A (mW)
Baseline	0.40	0.50	1.0000	0.595668	4.908
Shorter	0.40	0.40	1.2500	0.519658	−18.799
Longer	0.40	0.60	0.8333	0.672149	19.890
Narrower	0.36	0.50	0.8100	0.685423	21.906
Wider	0.44	0.50	1.2100	0.529686	−14.938

At fixed current the input powers are different. Negative cold-stage Q_c denotes net heating of the imposed cold boundary; it is not a solved package equilibrium or evidence of a working cooler under the archived 2 mW load.

21.2 Equal electrical input and stage budgets

To avoid comparing different electrical powers, a bounded root solve holds $P = IV = 0.595668$ W using a 0.25–0.55 A current bracket and the same frozen external series resistance 0.0461675 Ω. Each row is a solved axial state with the target matched within 1 μW. The chosen bracket is a numerical scenario, not an allowable current or voltage rating.

Case	Current (A)	Terminal V (V)	Stage-3 Q_c (mW)	$\Delta Q_{c,3}$ (mW)
Baseline	0.400000	1.489170	4.908	0.000
Shorter	0.435432	1.367993	−9.823	−14.731
Longer	0.372366	1.599683	13.440	+8.532
Narrower	0.368174	1.617899	14.531	+9.623
Wider	0.430163	1.384749	−7.338	−12.246

At these held boundary temperatures, the narrower sample has the highest sampled cold-stage heat lift at equal input power. Its current and heat difference are meaningful only for the axial sensitivity problem. No result

establishes a lower final mounting temperature or an optimal manufacturable geometry: the new stages need a self-consistent package heat balance and revised physical contacts.

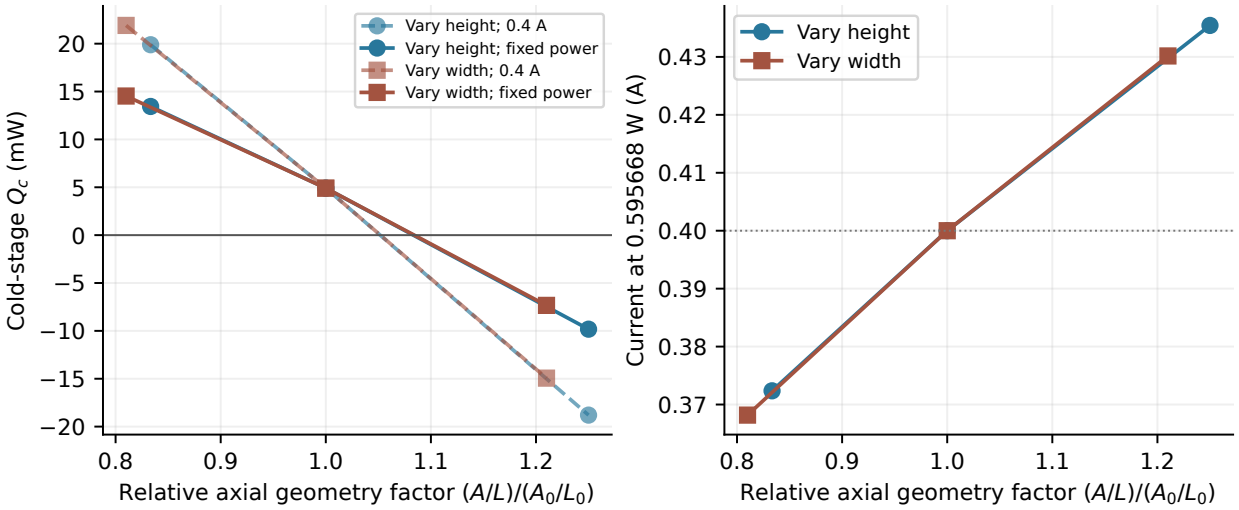


Figure 28: Frozen-pad 88-leg sensitivity. Left: stage-3 cold heat at fixed current and separately at matched terminal input; negative values heat the prescribed cold boundary. Right: solved current for equal 0.595668 W input. Axes describe hypothetical axial geometry, not a rebuilt assembly or a device temperature.

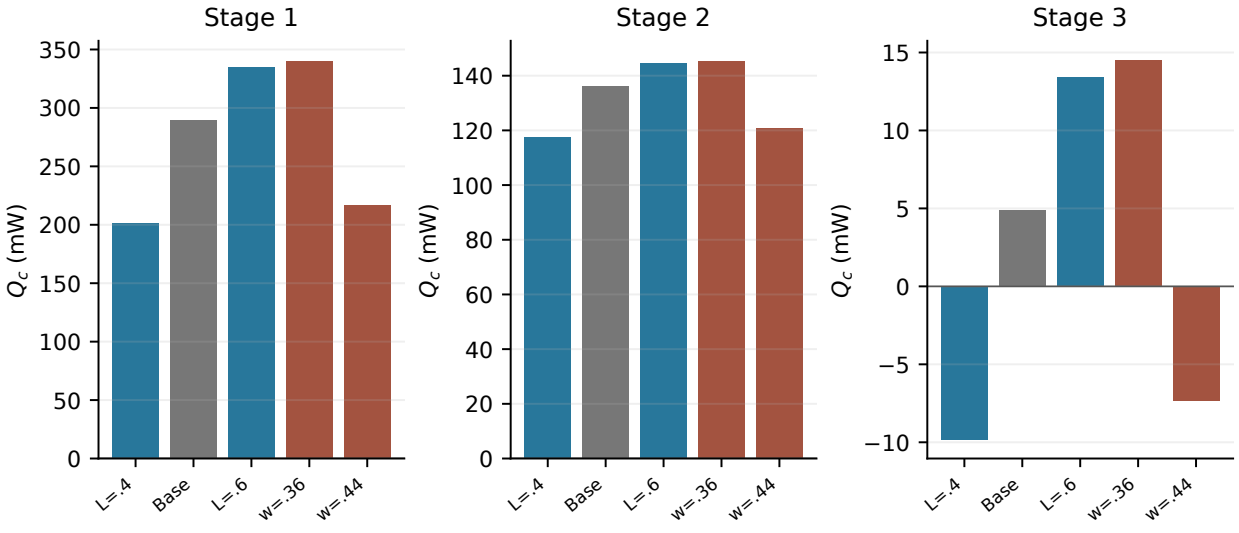


Figure 29: Cold-side heat rate in each P/N stage at the matched-power states. Independent scales show the smaller cold-stage budget. Stage-to-stage differences need not close because all source-pad temperatures and parasitic paths were prescribed rather than jointly solved.

For the length endpoints the matched-power finite-span sensitivity $dQ_{c,3}/d\ln g$ is -57.375 mW; for width endpoints it is -54.489 mW. Divided by the small 4.908 mW baseline these become -11.690 and -11.102. These are different-span secants, not statistical uncertainty estimates or derivatives of final detector temperature.

Five registered cases and ten fixed-current/matched-power states pass separate saved-data leg, stage and $P = IV$ checks; the largest stage residual is 1.025×10^{-12} W. The original source case passes its independently archived full-system audit. The four geometric changes have no rebuilt pads, foil, solder or gas domain and therefore were not promoted to package predictions. The original raw-current failure, gas/cold/bath numerical qualifications, and unknown source material/contact accuracy remain unchanged. A high-value next step is a separately built 0.60 mm-height geometry with aligned contacts and gas paths, followed by a bounded matched-power coupled solve and independent global heat balance.

22 Taller pellets: historical assembly feasibility

Historical exploratory study; the original 0.50 mm reference is the active design. The preceding frozen-boundary screen indicates a possible heat-lift direction, but it does not solve a changed cooler. Here the original 0.50 mm P/N legs are compared with a 0.60 mm *coordinate proposal*; the 0.40 mm square section, 0.58 mm pitch, 29/11/4 couple allocation and bottom mounting datum are retained. The four 0.50 mm ceramic plates require cumulative translations of 0, 0.10, 0.20 and 0.30 mm, respectively. Source-coordinate arithmetic preserves nominal axial alignment of all 88 legs with both 0.035 mm solder interfaces and 0.16 mm^2 contacts. These are geometric construction checks, not a regenerated three-dimensional assembly or validated contact surfaces.

Quantity	Original	Proposed
Core height (mm)	3.80	4.10
Die top above header datum (mm)	5.776	6.076
Axial die–window separation (mm)	3.874	3.574
Total P/N lateral surface (mm^2)	70.40	84.48
Total P/N volume (mm^3)	7.040	8.448
Nominal interleg edge separation (mm)	0.18	0.18

The 4.10 mm proposed stack exceeds the separate 3.80 ± 0.15 mm published product-height envelope; it is a synthetic design proposal, not a claim about a manufacturer's internal assembly. The die–window distance is an axial dimension and is not a collision or optical-clearance certification. The surface and volume changes are not a calculation of native gas conductance or gas volume.

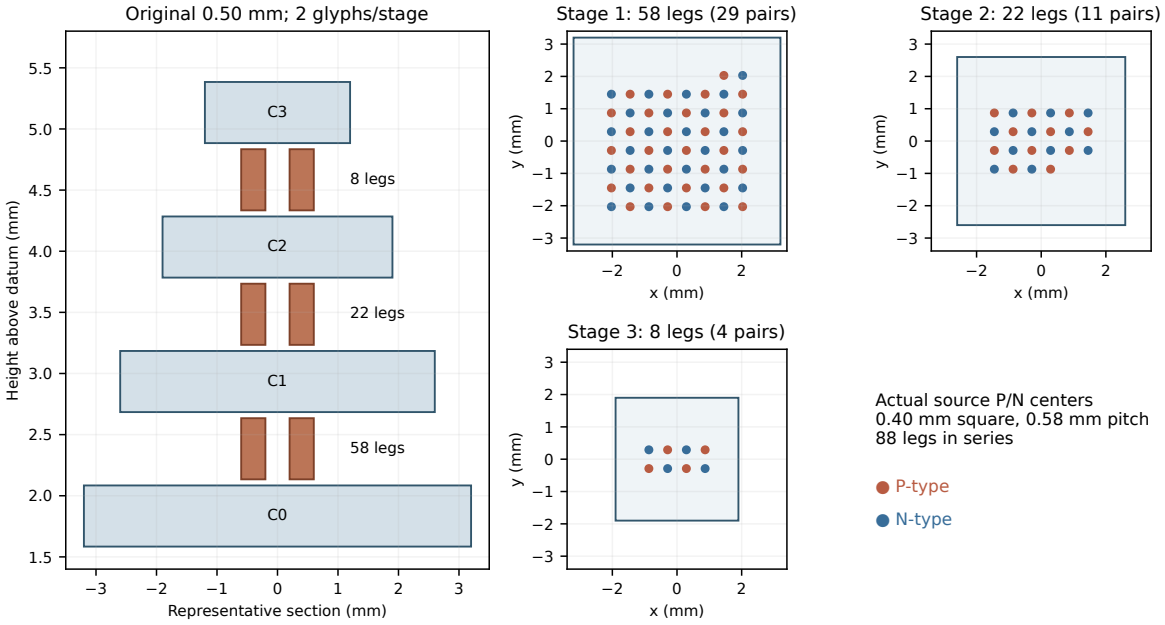


Figure 30: Original source 0.50 mm stack and actual P/N centers. The section shows two representative glyphs per stage; the plan views show all 58, 22 and 8 source legs. The alternative height study described here is archival.

The formed-copper neutral paths 58 and 80 each need 0.10 mm additional rise; the three-foot return 88 needs 0.20 mm. Their source-fillet path lengths become 2.061, 2.071 and 3.906 mm, respectively, before any new interference or contact audit. The original detector bond wire cannot simply remain fixed: after moving its die endpoint 0.30 mm, only 0.065 mm rise remains below the original apex, less than the 0.15 mm bend radius. A raised-apex analytic path can be drawn, but remains unverified for assembly and clearances.

Physical promotion and matched-power comparison remain stopped. Candidate CAD, contacts, clearance checks, ceramic mappings, copper multiport and cavity exchange have not been regenerated and checked. No new detector temperature or package energy balance is reported. The original 3D electrical contact gate remains failed. A rebuilt assembly with independent checks is required before assessing any cooling benefit.

22.1 Constructed custom-height assembly and verification

The preceding feasibility discussion records the earlier coordinate-only status. A separately constructed 0.60 mm-leg *custom* assembly now moves the four ceramic planes, rebuilds the 88 legs and solder joints, shifts the metallization and detector stack, reforms the three copper returns, and raises the two detector-wire paths while keeping their pin endpoints fixed. The source 0.50 mm assembly remains unchanged. The 4.10 mm stack is a design difference from the cited manufacturer's nominal envelope, not a physical impossibility or an assertion of that manufacturer's construction.

Candidate verification	Result
Source identities / altered body geometries	824 / 556
P/N–solder and solder–metallization contacts	176 + 176
Minimum independently calculated rectangular overlap	0.160 mm^2
Series nets; return-foil feet on 58 / 80 / 88	89; 2 / 2 / 3
Imported boundary contact witnesses	923
Curved-body Boolean overlaps / separation certificates	58 zero-volume / 1,250
Conservative shell / roof clearance lower bounds	0.785 / 3.186 mm
Minimum unrelated pin–wire clearance lower bound	1.783 mm

The exported 824-solid STEP was independently imported in SI units. A separate 1 mm cube gave 10^{-9} m^3; the maximum per-solid volume discrepancy was 1.29×10^{-11} relative and the largest bounding-coordinate discrepancy was 1.00×10^{-7} m. Contact witnesses establish imported face membership; the 0.160 mm^2 values are independently computed from the source rectangular solids. The clearance figures are conservative nominal geometric bounds, not manufacturing or tolerance qualification. The older source-audit tolerance table was hard-coded for the 3.80 mm baseline and is not a taller-candidate tolerance result.

This geometry result does not complete the changed cooler's ceramic face/mesh mapping, copper thermal and electrical parameters, native cavity treatment or full-system energy balance. No matched-power comparison or new mounting temperature is claimed. The historical 3D electrical contact gate remains failed; manufacturing capability, current rating and OEM equivalence remain unqualified.

22.2 Matched-power thermal comparison with translated ceramics

The preceding subsection describes the geometry checkpoint; the following results extend it. Two newly solved conditional package cases compare the source 0.50 mm legs with the separately constructed 0.60 mm assembly at 300 K reservoir, 100 Pa krypton and 2 mW imposed die heat. Terminal current is solved as an unknown subject to $IV = 0.595668$ W. The 88 individual nonlinear P/N legs couple to four source TET4 ceramic plates, whose geometry and 95 mapped source-face patches are rigidly translated with the assembly. Copper is a reduced multiport and the cavity is a reduced exchange model, not a full metal or gas field.

A geometry-derived interstage gas sensitivity uses three conservative parallel links,

$$A_j = W_{j+1}^2 - n_j A_\ell, \qquad G_j = \frac{k_g A_j}{d_j + 2b_j}, \qquad Q_j = G_j(T_{h,j} - T_{c,j}),$$

where A_ℓ is the leg footprint, d_j is the gap after the two metal films, and b_j is the temperature-jump length. The areas are 17.76, 10.92 and 4.48 mm^2; d_j is 0.57 mm or 0.67 mm for the two designs. Equal and opposite gas heat is applied to the adjacent ceramic plates. This is an engineering parallel-path proxy, not a solution of the connected interleg void.

Quantity	0.50 mm	0.60 mm
Current (A)	0.400298	0.370631
Terminal voltage (V)	1.488062	1.607175
Terminal power (W)	0.595668	0.595668
Hot ceramic (K)	303.761291	303.764120
Top ceramic (K)	219.297688	215.591806
Die mount (K)	219.368939	215.663617
Cold P/N leg Q_c, before parasitics (mW)	6.099	6.051
Sink rejection (W)	0.592285	0.592474

The custom case is 3.705 K colder at the mount under these particular assumptions. It is not a measured cooling improvement or a global optimum. The fixed external 3 mm gas-to-reservoir proxy and gray view factors are unchanged; their volume may overlap the new interstage approximation. At the archived fixed temperature field, changing only the external proxy gap from 1.5 to 3 to 6 mm gives 6.319, 3.420 and 1.783 mW of external gas heating, respectively; this is a fixed-field sensitivity, not a coupled uncertainty bound.

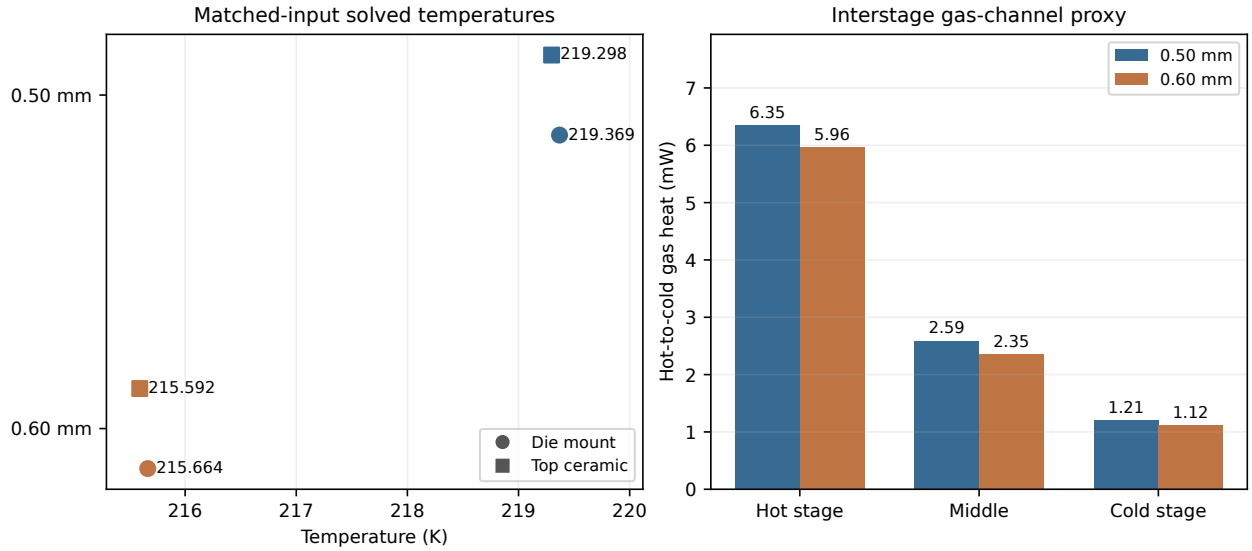


Figure 31: Actual coupled-solver outputs at matched electrical input. Left: solved die and upper-ceramic temperatures; right: calculated interstage gas heat from warmer to colder plates. The external gas and radiation paths and the reduced metal network are conditional proxies.

The source Cu return paths and detector bond lengths are recalculated for the candidate. The middle return foot remains a thermal port; its previously counted electrical series contact is excluded in both cases. Independent reconstruction checks each leg, all stage boundaries, copper and lead Joule heat, gas, die and sink. The largest stage-boundary and global residuals are 1.21×10^{-9} W and 1.05×10^{-9} W; maximum leg residual is 1.48×10^{-13} W. Final spatial updates are below 2.0×10^{-7} K. The source research specimens are unmatched, and temperatures above 300 K use an assumed continuation. The old 3D electrical-contact and raw-flux failures remain unchanged.

22.3 Matched-power robustness of the height comparison

The following paired comparisons vary one uncertain heat path at a time while preserving the 29/11/4 thermocouple layout and solving the actual 88 nonlinear legs and four source ceramic temperature fields at $IV = 0.595668$ W, 300 K ambient and 2 mW imposed detector heat. Both geometries receive the same change. The exterior gas path is a lumped proxy, not a resolved native cavity, and may overlap the interstage approximation; its nominal 3 mm effective distance is compared with 1.5 mm. A separate gas case suppresses all three interstage links, while the sink case adds 5 K/W to the original external sink resistance. These are engineering hypotheses, not measured tolerances.

Case	0.50 mm die (K)	0.60 mm die (K)	Difference (K)
V3.20 reference	219.369	215.664	-3.705
Interstage gas off	218.898	215.159	-3.739
Outer gas gap 1.5 mm	219.743	216.110	-3.633
Sink resistance +5 K/W	221.202	217.437	-3.765

The taller candidate remains colder at the mount in each displayed paired scenario. The sampled difference ranges from -3.765 to -3.633 K; this is a set of model scenarios, not a statistical interval or a guarantee for a manufactured part. All new cases meet the registered matched-power and independently reconstructed stage and whole-package energy gates. A separate fixed-field copper contact-resistance exercise changes the predicted metal heat paths; it is not an additional coupled temperature prediction. Net88's middle foot is a thermal port, not a series electrical contact. The historical spatial electrical-contact gate remains failed, the gas approximations are not validated native-void solutions, the research P/N specimens are not a matched commercial grade, and continuation above 300 K is assumed.

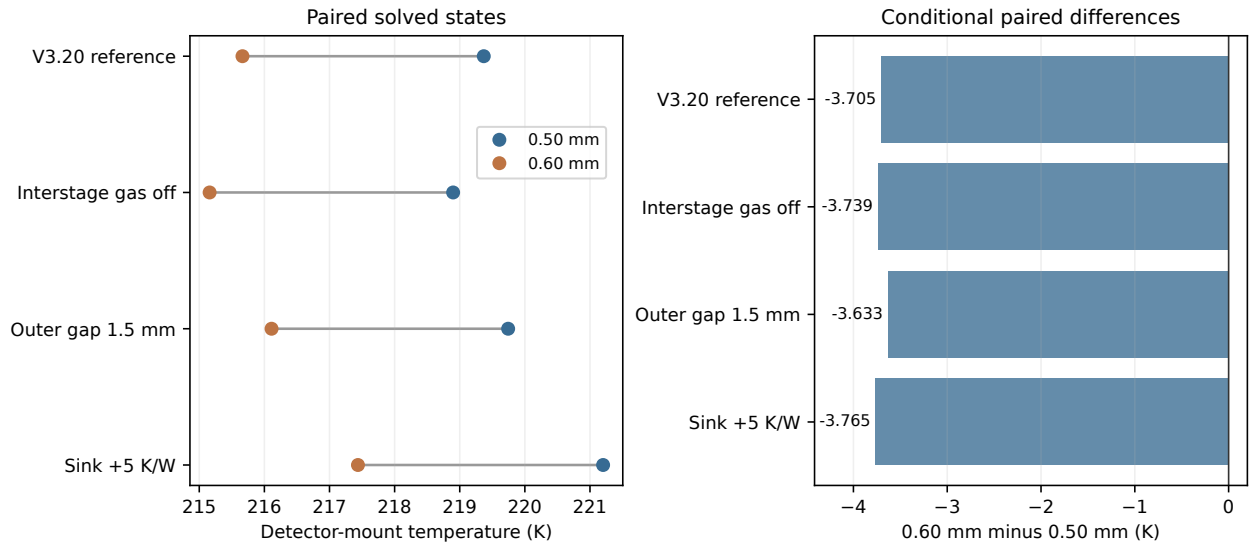


Figure 32: Actual matched-power package solutions for the nominal and custom leg heights. Differences are conditional on the specified gas and mounting models, with no interpolation across uncomputed scenarios. The reference pair is the previously archived result; other pairs are new independently audited solutions.

22.4 Source ceramic gas-face partition and remaining closure

The nominal and taller assemblies have identical source ceramic face areas and 0.600 and 0.700 mm substrate gaps, respectively. Direct metal contact on each ceramic face is partitioned from bare regions, and bare regions are divided into the projection facing the adjacent plate and the remaining area. This is a face-area accounting result, not a three-dimensional gas path or a gas transfer coefficient. For the three lower faces in each interstage gap, direct-contact-free facing areas are 11.218, 8.072 and 3.215 mm^2; on the opposing upper faces they are 11.380, 8.500 and 3.600 mm^2. Patterned metal covers different parts of each face. Gas can also contact those metal surfaces, so bare ceramic areas alone cannot represent total transfer.

The source cap, roof and window are present as ideal solids, and an earlier nominal derived geometry contains a connected gas volume. The taller assembly has not yet received an independently qualified connected-gas and complete gas-facing metal-port mapping. Its seal and gas transport parameters are not measured. Treating the projected ceramic regions as independent gas paths would therefore omit metal and could still double-count connected gas transport. No new paired temperature solve was made, and the preceding conditional comparisons retain their limitations.

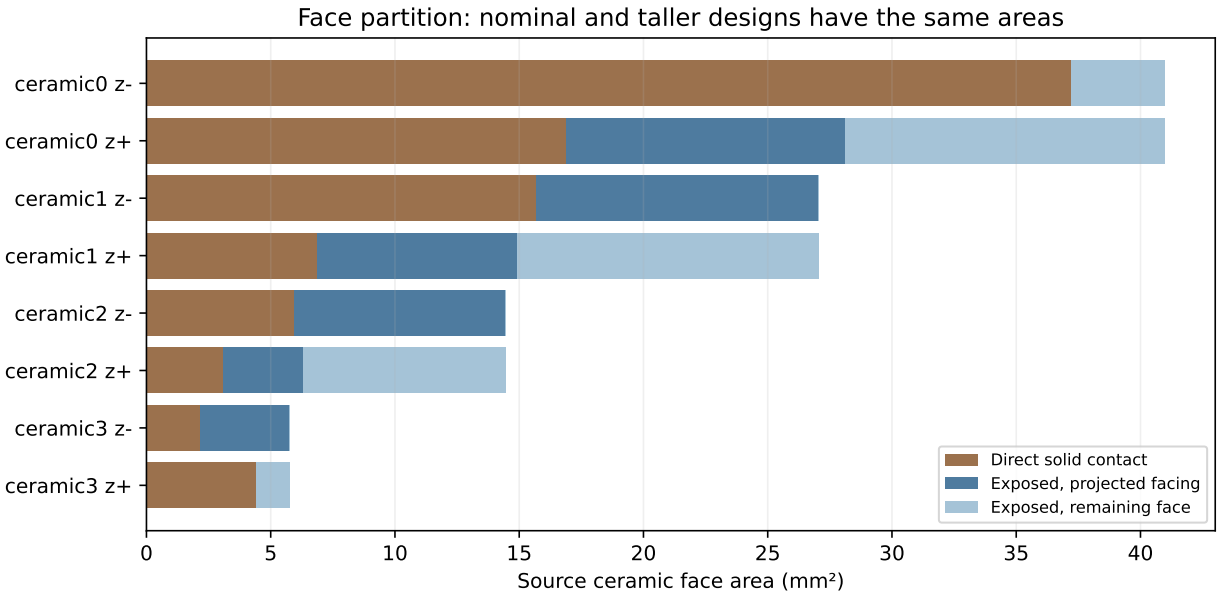


Figure 33: Disjoint rectangular source-ceramic face areas for the two assemblies. “Facing” indicates only the projection of the neighbouring ceramic onto the bare face, not free access through the gap. The source side faces and gas-facing metallization are not shown.

22.5 Original reference: native gas-face ownership and regime

The working reference is the original three-stage 29/11/4-couple cooler, with $0.40 \times 0.40 \times 0.50$ mm P/N legs. At a 300 K reservoir, 100 Pa krypton, 2 mW imposed die heating and 0.595668 W electrical input, the previously solved proxy model gives 219.368939 K at the detector mount. This is a conditional model result, not a measured temperature. Its leg, copper, wire, radiation and gas terms retain the limitations stated above.

The archived nominal connected-gas geometry has 1,840 distinct gas–solid interfaces totaling 903.215 mm^2, attached to 429 solid owners. The inventory records each face's location, source lineage and semantic thermal element. Of these faces, 523 belong to patterned conductor nets, 352 to P/N legs, 760 to joints and fillets, and 24 to ceramics. These semantic identifications are not boundary conditions: the local gas-face temperature and exchange law have not yet been mapped to the spatially varying solid models. Eight lead-joint faces retain unresolved thermal destinations. Thus no new gas-field or coupled detector-temperature solution is claimed.

For an engineering rarefaction screen, using an effective krypton collision diameter of 0.36 nm, the hard-sphere mean free path $\lambda = k_B T/(\sqrt{2}\pi d^2 p)$ is approximately 0.060 mm at 250 K and 100 Pa. It gives Kn $\approx$ 0.105 for a 0.570 mm interstage gas-length approximation and Kn $\approx$ 0.333 for a 0.180 mm interleg gap. The 0.36 nm kinetic-diameter scale is reported by Kwon and co-workers;[2] its use as a hard-sphere Kr–Kr diameter is a modeling assumption. These gaps approach or enter the transition regime; ordinary no-slip continuum convection is not established at this pressure. At atmospheric pressure, a separate continuum Rayleigh screen depends strongly on length, orientation and boundary conditions and does not validate the 100 Pa model.

[2] Y. H. Kwon et al., *Krypton-Xenon Separation Properties of SAPO-34 Zeolite Materials and Membranes*, https://www.osti.gov/servlets/purl/1356958.

22.6 Original source: partial gas exchange at saved ceramic fields

A source-only subset pairs bare ceramic surface patches through vertical columns that avoid the source solid bounding volumes. The three paired unblocked areas are 7.428, 5.498 and 1.979 mm^2. They are disjoint surface allocations, not a complete gas-domain solution or bounds on total physical gas heat flow. The annular enclosure is excluded from the blocking test only where its inner radius is demonstrably outside the working footprint.

For 100 Pa krypton, applying a Maxwell-type temperature-jump conductance to these 752 cells and sampling the archived four ceramic temperature fields gives the following hot-to-cold heat flows. The gas accommodation coefficient α is an assumed sensitivity, not a measured material property.

α	C0–C1 (mW)	C1–C2 (mW)	C2–C3 (mW)
0.5	1.900574	0.918993	0.401021
0.8	2.519773	1.188742	0.506549
1.0	2.826754	1.317665	0.555253

Each link applies equal and opposite heat to its two ceramics; the four resulting loads sum to zero. Node temperatures are nearest-source-node samples, with maximum lateral distance 0.1784 mm. The calculation is one-way: the old ceramic fields are held fixed, other gas surfaces are omitted for this diagnostic, and no new detector temperature is predicted. A physically coupled calculation still requires conservative subface integration and allocation of all other gas-facing surfaces; gas diffusion across the connected cavity is not represented by independent columns.

The eight lead-joint gas faces now have source-backed wire and pad or pin contact identities and provisional endpoint temperatures. The patterned-metal and P/N side temperatures remain approximations, the full metal-field electrical gate remains failed, and no native gas boundary condition has been qualified.

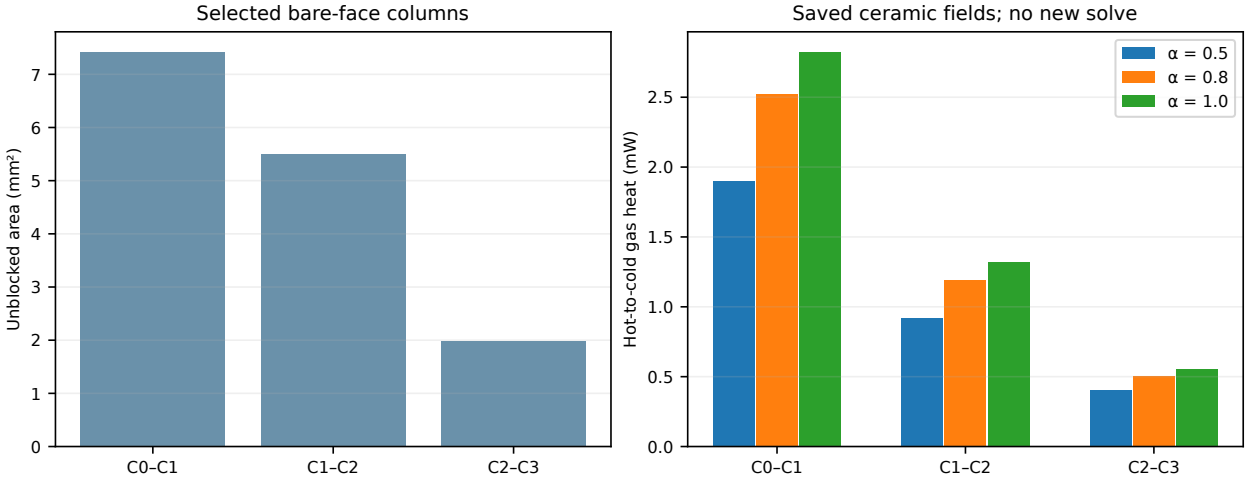


Figure 34: Original-source subset areas and gas-link calculations at archived ceramic fields. The three accommodation settings are hypotheses; omitted cavity paths and the absence of a new coupled solve preclude interpreting the bars as total package gas heat.

23 Original-device spatial gas coupling on native ceramic meshes

The original $0.40 \times 0.40 \times 0.50$ mm, 88-leg reference is retained. In each of the three interstage gaps, source-derived unobstructed rectangular columns were intersected with both native ceramic triangular surface meshes. The common refinement contains 752 columns and 6109 intersection polygons. Exact polygon area and linear P1 shape-function integrals distribute equal and opposite gas heat to the original tetrahedral ceramic nodes; the nonlinear gas flux itself uses one centroid evaluation per intersection polygon. This is a spatial reduced model, not a gas-domain field solution.

Table 1: Area of paired, unobstructed bare-ceramic source regions. Both surfaces of each pair are covered by the same common-refinement area.

Gap	Paired area (mm^2)	Area error (mm^2)
C0–C1	7.428064	-1.8×10^{-15}
C1–C2	5.497517	$+1.8 \times 10^{-15}$
C2–C3	1.979438	-4.4×10^{-16}

For an explicitly conditional original-device case, the previous exterior and interstage gas proxies were disabled; the selected bare-ceramic columns provide the only gas exchange, all other gas boundaries are adiabatic, and gray radiation remains a separate process. At 300 K bath, 100 Pa krypton, accommodation 0.8, 2 mW die heat and 0.595668 W electrical input, the coupled calculation gives 218.659107 K die temperature, 218.591711 K top ceramic, 303.744877 K hot ceramic, 0.399961 A and 1.489316 V. The three gas-link heat flows are 2.534996, 1.197643 and 0.511544 mW. Maximum independent stage and global energy residuals are 1.06×10^{-9} W and 9.15×10^{-10} W. The previous 219.368939 K result used different overlapping gas proxies; the -0.709832 K difference combines omitted and redistributed gas paths and is not a prediction of physical improvement.

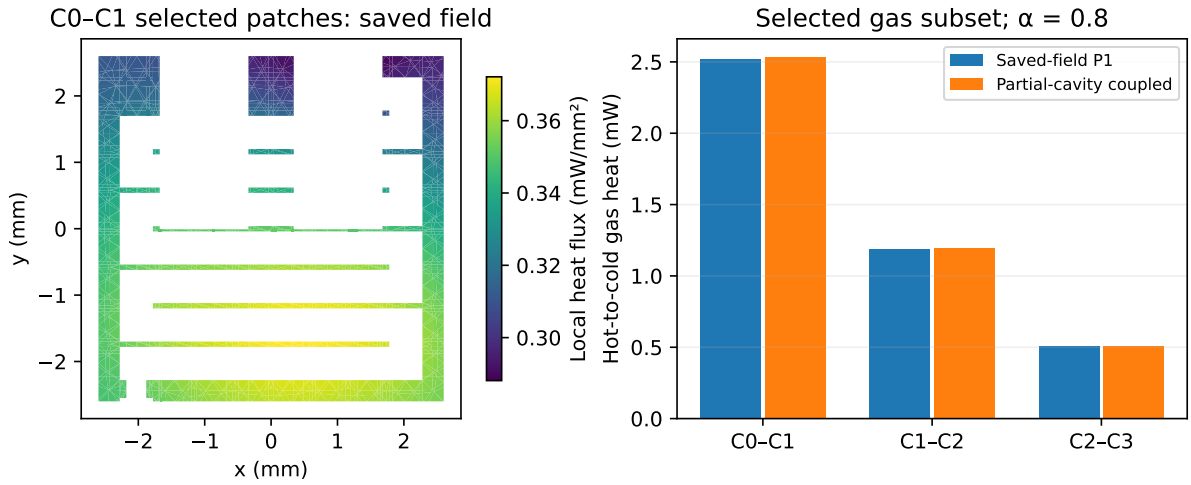


Figure 35: Source-mesh P1 gas exchange over selected bare-ceramic patches and gap heat flows. White areas are not represented gas-exchange surfaces. The saved-field diagnostic and conditional coupled result use the same geometry and assumed accommodation.

The paired surface area totals 29.810036 mm^2, 3.3004% of the registered gas-facing area. Six faces are partly covered; 1834 faces have no P1 patch and 173 temperature-proxy assignments remain unresolved. Patterned metal, lead and enclosure transport are not completed. Krypton conductivity and temperature-jump parameters are assumptions; the coupled result is neither a complete cavity solution nor experimental validation. Native metal electrical current-flux qualification and the historical bath, cold-interface and gas-flux gates remain failed.

24 Source-connected local copper temperatures and gas coupling

The original source defines three formed copper paths rather than isothermal electrical nets. Source line and arc coordinates locate 39 gas-face centroids on the contact-centered foil segments; 18 other formed-tab faces remain unresolved because their centroids do not identify a valid local segment position. The original reduced contact resistance is an assumed thermal input, not a measured interface property. With no gas heat on the foil, each constant-property segment has

$$T(u) = (1-u)T_0 + uT_1 + \frac{I^2R}{2G}u(1-u), \quad 0 \le u \le 1, \tag{1}$$

where $G = kA/L$, R is segment electrical resistance, and the endpoint temperatures are saved foil nodes. This solves the stated one-dimensional energy balance; it does not supply a measured or three-dimensional surface field.

The mapped foil-centroid ranges are 273.844–299.078 K for net 58, 249.439–268.080 K for net 80 and 249.783–298.380 K for net 88; maximum segment Joule curvature is below 0.030 K in this saved state. A separate analytic uniform-bath segment operator satisfies endpoint-plus-Joule energy balance and agrees with a refined independent one-dimensional numerical control. Its bath conductance is an input, not a native-cavity measurement.

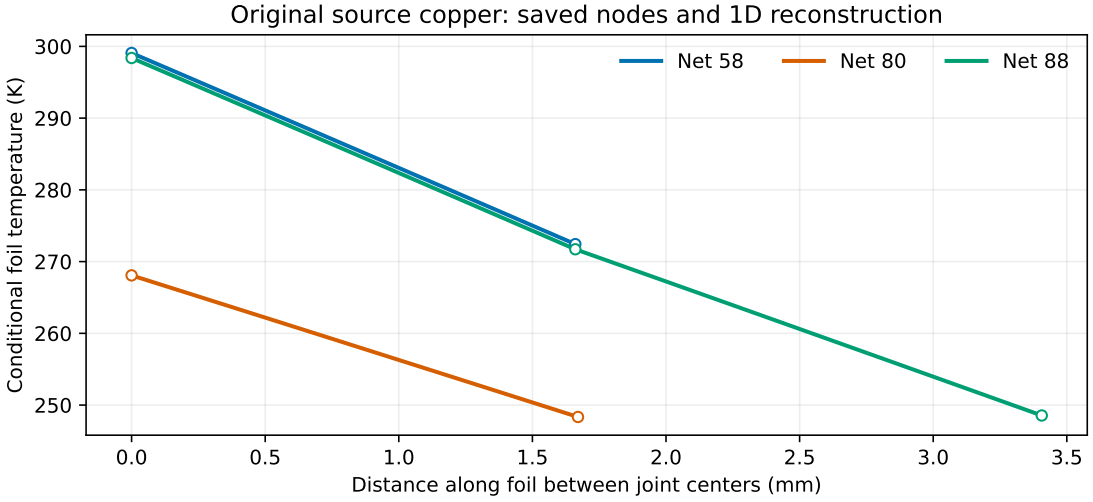


Figure 36: Saved foil contact-node temperatures and conditional one-dimensional interpolation along original source foil paths. The middle net 88 node is a thermal contact and is not an additional series electrical contact.

For illustration only, a 15 μm copper film with assumed conductivity 200–400 W/(m K) and heat flux 1000 W/m^2 has a through-film drop of 0.0000375–0.000075 K; unmeasured metal–ceramic contact and in-plane spreading are excluded. Of 1840 gas-facing faces, 39 have conditional distributed-tab centroid mappings, 1667 retain earlier approximate thermal proxies, and 134 remain unresolved. No additional metal–gas path is yet certified: finite paired areas, obstruction-free paths, and disjoint ownership must first be established from the actual trimmed surfaces. No new coupled temperature was solved, and the earlier electrical and gas-flux failures remain unchanged.

25 Original detector-to-window gas path

The source-native detector top and window underside have opposed surface normals and a 3.873750 mm separation. Their actual triangular meshes were intersected after conservatively excluding the projected bounding boxes of all source solids crossing the gap. Of the 0.995800 mm^2 detector gas face, 0.694600 mm^2 is represented by 301 common projected polygons; the source mesh and CAD face-area disagreement is 0.1711% for the window and negligible for the detector. The old interstage gas columns terminate below the new paths, and no source face or modeled area is reused for the same gas mechanism.

With a 300 K window assumption, 100 Pa krypton and accommodation 0.8, this subset contributes 0.112833 mW into the die in one matched-power coupled calculation. The original 752 ceramic P1 columns are retained, prior overlapping gas proxies are disabled, and gray radiation remains a separate proxy. At 0.595668 W electrical input and 2 mW die load, the modeled die, stage-2 cold-interface and carrier nodes are 218.693303, 218.605250 and 218.623662 K respectively. The die is 0.034196 K warmer than the preceding partial-cavity result. Independent stage and whole-package energy residuals are below 1.1×10^{-9} W.

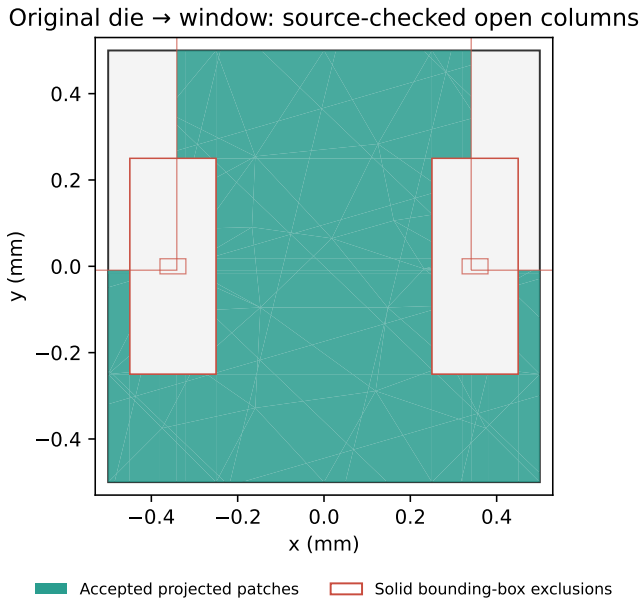


Figure 37: Actual source-mesh die/window common projection. Green polygons are accepted straight geometric columns; red outlines conservatively exclude source contact and bond-wire bounding boxes. These columns are not molecular trajectories or a complete gas field.

The earlier independent-audit label `top_K` refers to the carrier node, not the stage-2 cold-interface node; the distinction is made explicitly here. The modeled two-sided gas patches now cover 31.199236 mm^2, or 3.45424% of registered gas-facing area. The remaining gas surfaces are adiabatic only in this conditional scenario. Lateral gas transport, actual window temperature and contact properties remain unqualified; these results are not complete-cavity or experimental device predictions. Historical gas-flux and three-dimensional metal-electrical gates remain failed.

26 Geometric fidelity and remaining discretization risk

The first full R3.8 TetGen volume candidate contained 1,043,314 tetrahedra over 430 material regions, with all 320,522 registered facets and 378 finite-contact witnesses retained. R3.9 applied 33,195 conservative 3-to-2 internal connectivity operations and reduced the mesh to 1,010,119 tetrahedra with unchanged original surface facets and regional volumes. R3.9 retains 241,754 tetrahedra with mean-ratio quality below 0.05 (23.93 percent) and a minimum of 1.38495×10^{-4}. Thus no global coupled 430-domain electrical and thermal PDE is released. Historical full-solid electrical Gate B is FAIL/STOP; the first source N/P pair had eight raw gradient-current failures; the prospective P2 and global C/D computations are not qualified. Good energy closure in a separate hybrid model does not erase these original raw gates.

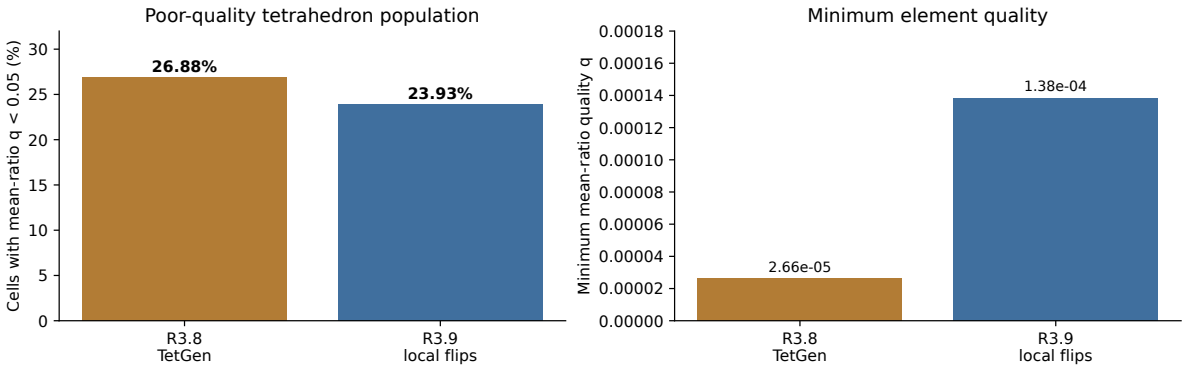


Figure 38: Independent archived global mesh-quality measurements. The 3-to-2 flips improved the poor-cell population, but the minimum quality and remaining weak cells prevent assuming mesh-converged coupled FEM.

27 Predicted detector temperature under enclosure loading

The following **historical baseline** V3.2 versus V3.3 comparison (prior to adding V3.4 interstage copper) uses the same 88-leg source geometry, 11,791 ceramic tetrahedra, 0.4 A input, 300 K reservoir, 2 mW detector load and assumed material/contact parameters. The cavity raises die temperature 0.637233 K, while the nonlinear terminal voltage changes slightly due to changed operating gradients.

Metric	V3.2 (cavity off)	V3.3 (cavity on)
Detector temperature (K)	209.987981	210.625214
Terminal voltage (V)	1.524071	1.522462
Electrical input (W)	0.609628	0.608985
Bath rejection (W)	0.590323	0.594044
Pressure (Pa)	0 (cavity off)	100 (Kr)

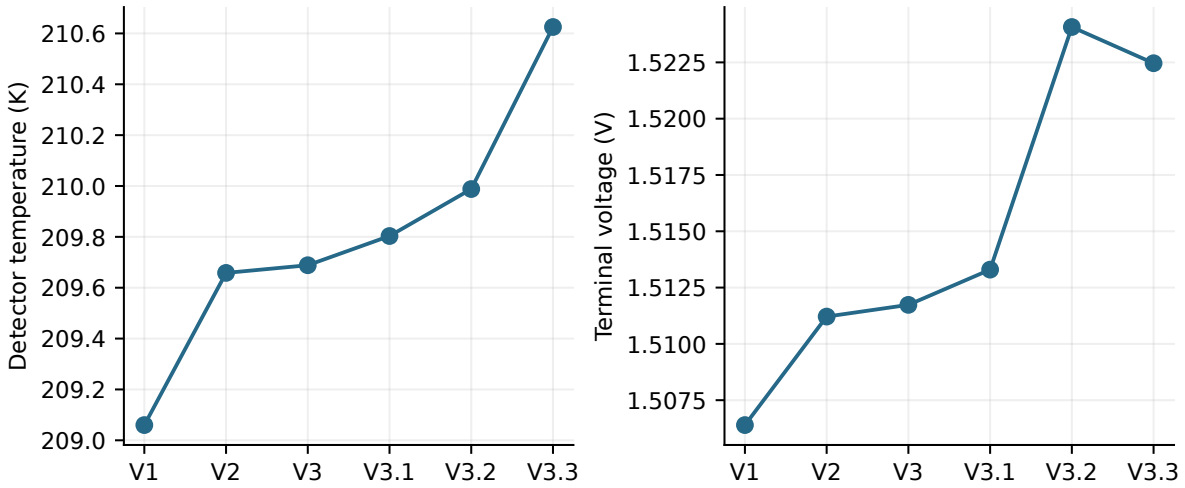


Figure 39: Recorded V1 to V3.3 complete reference-model milestones, all evaluated at the nominal current. These points describe changing model fidelity, not successive mesh convergence or independent measurements.

28 Historical V3.3 stage temperatures, heat flow, and electrical input

Stage	Legs	Cold flux (mW)	Hot flux (mW)	V	Joule (mW)
1	58	179.9602	614.7396	1.086948	262.732
2	22	46.1636	176.5165	0.325882	81.390
3	8	5.1576	43.7058	0.096371	24.642

Coupled node	Temperature (K)
Stage0 Hot	303.65655
Stage0 Cold	265.90329
Stage1 Hot	266.34287
Stage1 Cold	236.00259
Stage2 Hot	236.15716
Stage2 Cold	210.52765
Carrier	210.55066
Die	210.62521

The external terminal voltage includes additional lead and joint contributions beyond summed P/N voltage. Stage energies must account for signed electrical work, source losses, detector heat, cavity sources and external sink. Directly adding cavity milliwatts to input electrical power without solving the changed stage temperatures would be incorrect.

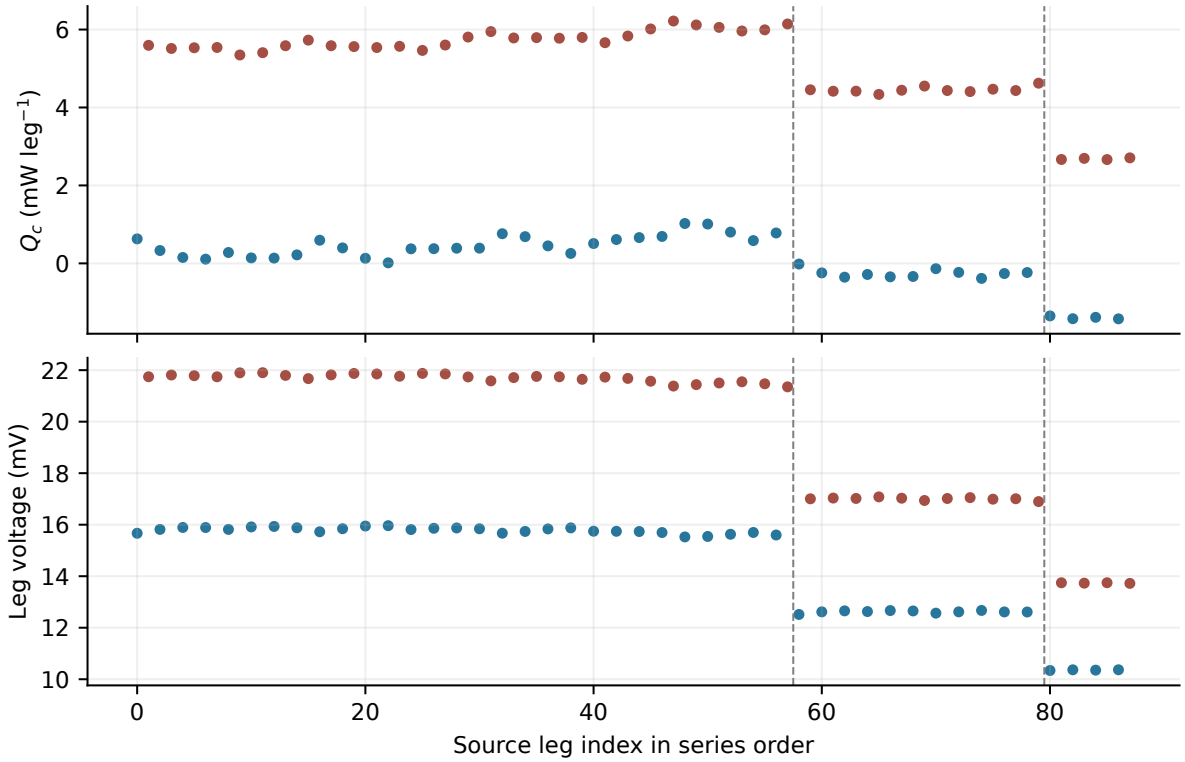


Figure 40: Real saved individual-leg cold-side heat and terminal-voltage contributions. Stage transitions occur after source leg indices 57 and 79. Source material laws and local ceramic pad temperatures determine leg-specific behavior.

29 Historical V3.3 energy conservation and numerical credibility

For the **earlier V3.3 baseline only**, the solver used the previous V3.2 solution as a warm start and iterated five spatial leg/pad updates, stopping at a maximum pad temperature change 1.65345×10^{-5} K below its registered 2×10^{-5} K criterion. That number is a *numerical stopping threshold*, not a temperature accuracy bound.

Iteration	Die T (K)	Max pad update (K)	Local flux mismatch (W)
1	210.599377	1.690e-02	3.914e-15
2	210.624173	2.066e-03	4.580e-16
3	210.625110	4.135e-04	1.478e-15
4	210.625220	8.254e-05	2.928e-15
5	210.625214	1.653e-05	5.503e-15

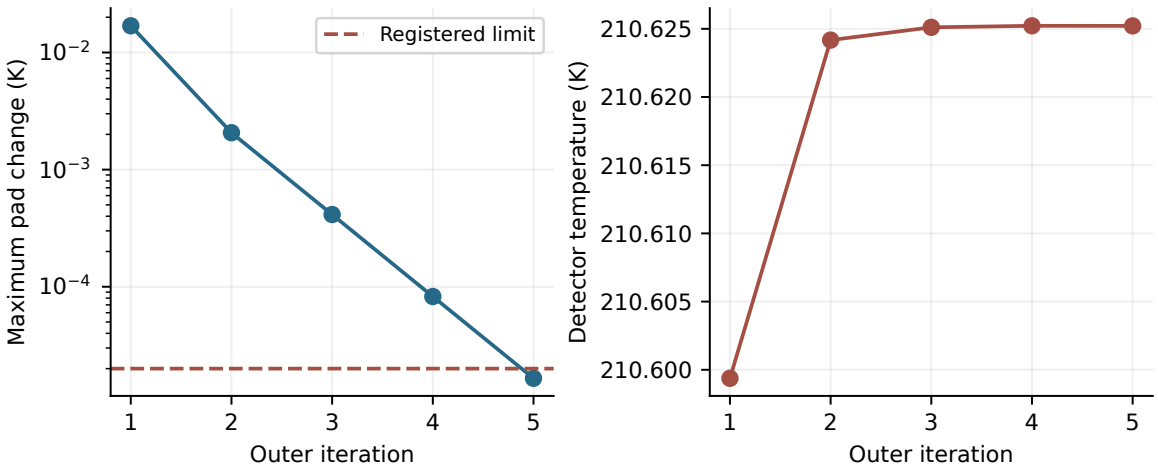


Figure 41: Actual saved spatial fixed-point iteration changes and detector temperature history. The last update meets the registered coarse convergence threshold; no mesh refinement or material uncertainty bound is inferred.

Metric	Absolute residual	Unit
Global energy	8.8674e-09	W
Worst stage balance	4.9061e-09	W
Ceramic pad heat	5.5025e-15	W
Worst individual leg	1.2364e-13	W
Final pad temperature change	1.6535e-05	K

An independent read-only field/load audit reconstructs the saved energy terms without rerunning the original PDE and finds a finite 2.535×10^{-8} W pad/leg update discrepancy. Numerical closure validates the *declared equations and discretization bookkeeping* at this operating point, not prediction fidelity of the as-built cooler.

30 Device engineering implications and next experiment

The physical cooler is now represented by a functioning complete thermal/electrical model including a first conservative three-branch copper network tied to original ceramic pads. The present V3.5 corrected-power-lead reference gives 218.900 K (versus V3.4 218.833 K and earlier V3.3 210.625 K); these are conditional modeled values, not manufactured device temperatures. It is *not* necessary to restart cooler CAD development. However, full three-dimensional copper/metal fields and actual thermal-contact characterization are not yet available. The current and detector-heat-load operating envelope now exists as the accepted V3.6 extension above. The next practical milestone is to couple bounded HgCdTe photoconductor resistance and bias/optical dissipation to that solved thermal environment, while quantifying uncertainty in the *already integrated* multiport: copper conductivity/resistivity versus temperature, joint thermal/electrical impedances, foil thickness and metal-film heat spreading. Use targeted source-informed screening to select conditions that merit expensive full-system recomputation. Full 3D copper FEM may be justified if compact validated metal substructures cannot bound current crowding or nonlocal heat flow. The older 38-page Revision 3 is preserved because of its unusually useful FEM methodology and publication-level plots, *not* because it describes the current metal layout. The 43-page interim extension is historical, not the latest design reference.

31 Model provenance and numerical evidence hierarchy

Artifact	Subject	Verified status
Historical Rev3	Earlier 216-solid 28/12/4 cooler	Detailed field method; raw-gradient release failed
Replacement V3 R1	824 physical STEP bodies, formed tabs and joints	Conditional CAD design acceptance
R3.9 geometry	430 material regions, 2,440 CAD faces	Geometric mesh audit; conditioning unqualified
V3.3 thermal baseline	88 nonlinear legs and four source 3D ceramic fields	Accepted reference without formed Cu network
V3.4 coupled source Cu	Source ceramics plus formed Cu multiport	Archived accepted reference; combined power-lead heat
V3.5 separated TEC leads	Source-local pin 1/9 wire heat and joint sensitivity	Three accepted conditional results; original 3D metal PDE still unqualified

The cooler envelope is informed by TEC Microsystems MC04 family reference geometry; the package by a separate VIGO nine-pin TO-66 drawing. They are not identified as a commercially fabricated composite. The 29/11/4 stage split, material grades, solder properties and fabricated metal details are source-inspired or chosen synthetic hypotheses, *not* proprietary OEM internals.

32 Physical assumptions and reproducibility specification

An independent implementation should use the four 0.5 mm-thick 6.4/5.2/3.8/2.4 mm ceramics, the Appendix B 88 leg centers and polarities, the 29/11/4-couple electrical series order and the source-selected 0.4 by 0.4 by 0.5 mm P/N geometry. Apply all six 14-knot P/N research-material curves in Appendix A; interpolate within the experimental range and explicitly impose the unmeasured quarter-final-segment-slope continuation above 300 K. Solve 88 individually signed 32-interval nonlinear axial thermoelectric legs and four source-geometry P1 ceramic steady conduction systems using local native TRI3 heat-face integrals. Set the declared assumed ceramic conductivity to 30 W/(m K), add the nominal 176 SnSb joints and 352 assumed electrical contacts, Cu and Au external leads, 2 mW detector heat, the stated finite mounting resistance and the effective 100 Pa Kr/gray radiation closure. For V3.5, include distinct pin1/9 supply lead heat on faces 8 and 36, then include the three finite-contact Cu-foil connections from native faces 38/75, 79/105 and 36/74/104 and iterate to a maximum local pad change below 0.0000003 K and independently check all signed stage and total heat balances. The archived Appendix C face centroids, areas and flux totals permit a comparable heat-integral replication, not byte-exact nodal temperatures. Bitwise reproduction requires original tetrahedral connectivity, exact face polygon vertices, quadrature and solver conventions. No unpublished real-world detector measurements are claimed.

33 Scientific and engineering references

1. TEC Microsystems, three-stage 3MC04-044-05 cooler family datasheet (2019), external envelope and thermoelectric reference. Its hidden internal routing is unknown.

2. VIGO Photonics, 3TE TO-66 nine-pin housing reference, Rev. 9 (2024). The cooler and housing are independent reference products.

3. J. Zhang et al., low-temperature bismuth telluride thermoelectric measurement and error-analysis study, *Chinese Physics Letters* 42, 056304 (2025). DOI 10.1088/0256-307X/42/5/056304. Source P-HE and N-HE-1 specimens are not the actual installed module.

4. M. L. Huber, gas thermal conductivity tabulations (NIST/CRC, 2019): krypton material reference, not experimentally measured gap conduction.

5. TEC Microsystems and Kryotherm multistage construction drawings and photographs; Coherent mounting guidelines. These establish process families, not qualification of the selected synthetic formed-tab design.

A Complete 14-knot P and N transport source tables

The following 84 values comprise six figure-digitized research-specimen curves. They do not establish actual commercial material properties. The assumed extension beyond 300 K is

$$f(T) = f(300) + 0.25\,(T - 300)\frac{f(300) - f(280)}{20}, \qquad f \in \{S, \rho, k\}.$$

T K	S_P μV/K	ρ_P $\mu\Omega$ m	k_P W/(m K)	S_N μV/K	ρ_N $\mu\Omega$ m	k_N W/(m K)
40	31.477086	1.226120	2.776424	-39.762194	0.837035	3.928920
60	44.991486	1.550968	2.488935	-53.616397	1.156199	3.246955
80	60.679339	1.955036	2.260290	-67.469437	1.522950	2.816874
100	77.996604	2.446265	2.072406	-81.936140	1.920207	2.536709
120	96.944423	3.004830	1.909416	-95.992742	2.354830	2.310364
140	115.755946	3.567364	1.764537	-109.847998	2.820018	2.129254
160	133.684757	4.343818	1.630978	-122.547039	3.319204	1.973635
180	150.458980	5.175731	1.515526	-134.499967	3.835302	1.851971
200	166.078757	6.067058	1.415926	-145.840430	4.371811	1.744414
220	179.321421	7.073284	1.332165	-156.231255	4.932113	1.653884
240	190.594863	8.138932	1.257469	-165.737958	5.570441	1.574639
260	199.219885	9.351143	1.194083	-174.568277	6.232621	1.506729
280	205.739245	10.694094	1.137484	-182.445326	6.884545	1.447332
300	212.462550	12.080611	1.099006	-189.575244	7.543277	1.399227

B All original 88 P/N leg centers

Each leg has 0.1600 mm^2 area and 0.5000 mm axial length; stage index 0 is the hottest. All coordinates refer to the original selected synthetic CAD x/y frame in mm.

No.	Stage	P/N	x (mm)	y (mm)	No.	Stage	P/N	x (mm)	y (mm)
0	0	N	-2.030000	-2.030000	44	0	N	-0.290000	0.870000
1	0	P	-1.450000	-2.030000	45	0	P	-0.870000	0.870000
2	0	N	-0.870000	-2.030000	46	0	N	-1.450000	0.870000
3	0	P	-0.290000	-2.030000	47	0	P	-2.030000	0.870000
4	0	N	0.290000	-2.030000	48	0	N	-2.030000	1.450000
5	0	P	0.870000	-2.030000	49	0	P	-1.450000	1.450000
6	0	N	1.450000	-2.030000	50	0	N	-0.870000	1.450000
7	0	P	2.030000	-2.030000	51	0	P	-0.290000	1.450000
8	0	N	2.030000	-1.450000	52	0	N	0.290000	1.450000
9	0	P	1.450000	-1.450000	53	0	P	0.870000	1.450000
10	0	N	0.870000	-1.450000	54	0	N	1.450000	1.450000
11	0	P	0.290000	-1.450000	55	0	P	2.030000	1.450000
12	0	N	-0.290000	-1.450000	56	0	N	2.030000	2.030000
13	0	P	-0.870000	-1.450000	57	0	P	1.450000	2.030000
14	0	N	-1.450000	-1.450000	58	1	N	1.450000	0.870000
15	0	P	-2.030000	-1.450000	59	1	P	0.870000	0.870000
16	0	N	-2.030000	-0.870000	60	1	N	0.290000	0.870000
17	0	P	-1.450000	-0.870000	61	1	P	-0.290000	0.870000
18	0	N	-0.870000	-0.870000	62	1	N	-0.870000	0.870000
19	0	P	-0.290000	-0.870000	63	1	P	-1.450000	0.870000
20	0	N	0.290000	-0.870000	64	1	N	-1.450000	0.290000
21	0	P	0.870000	-0.870000	65	1	P	-0.870000	0.290000
22	0	N	1.450000	-0.870000	66	1	N	-0.290000	0.290000
23	0	P	2.030000	-0.870000	67	1	P	0.290000	0.290000
24	0	N	2.030000	-0.290000	68	1	N	0.870000	0.290000
25	0	P	1.450000	-0.290000	69	1	P	1.450000	0.290000
26	0	N	0.870000	-0.290000	70	1	N	1.450000	-0.290000
27	0	P	0.290000	-0.290000	71	1	P	0.870000	-0.290000
28	0	N	-0.290000	-0.290000	72	1	N	0.290000	-0.290000
29	0	P	-0.870000	-0.290000	73	1	P	-0.290000	-0.290000
30	0	N	-1.450000	-0.290000	74	1	N	-0.870000	-0.290000
31	0	P	-2.030000	-0.290000	75	1	P	-1.450000	-0.290000
32	0	N	-2.030000	0.290000	76	1	N	-1.450000	-0.870000
33	0	P	-1.450000	0.290000	77	1	P	-0.870000	-0.870000
34	0	N	-0.870000	0.290000	78	1	N	-0.290000	-0.870000
35	0	P	-0.290000	0.290000	79	1	P	0.290000	-0.870000
36	0	N	0.290000	0.290000	80	2	N	0.870000	-0.290000
37	0	P	0.870000	0.290000	81	2	P	0.290000	-0.290000
38	0	N	1.450000	0.290000	82	2	N	-0.290000	-0.290000
39	0	P	2.030000	0.290000	83	2	P	-0.870000	-0.290000
40	0	N	2.030000	0.870000	84	2	N	-0.870000	0.290000
41	0	P	1.450000	0.870000	85	2	P	-0.290000	0.290000
42	0	N	0.870000	0.870000	86	2	N	0.290000	0.290000
43	0	P	0.290000	0.870000	87	2	P	0.870000	0.290000

C Native ceramic-face geometric and solved heat ledger

For each original ceramic and native thermal face, the table lists source face ID, centroid (mm), original CAD area (mm^2) and the signed integrated solved heat *into* that ceramic (W). Contributions include local P/N transport, provisional joint heating, finite sink, detector and effective cavity loads when applicable. Exact face polygons are not fully specified by centroids and areas.

Cer.	Face ID	x	y	z	Area mm^2	Heat in (W)
0	6	0.000000	0.000000	1.584250	37.21000000	-5.9404375264e-01
0	8	-2.030000	-2.415000	2.084250	0.58100000	+6.9212449542e-03
0	9	-1.160000	-2.030000	2.084250	0.54000000	+2.1001118011e-02
0	10	-0.000000	-2.030000	2.084250	0.54000000	+2.0799385661e-02
0	11	-2.030000	-1.160000	2.084250	0.54000000	+2.1333430585e-02
0	12	-1.160000	-1.450000	2.084250	0.54000000	+2.0925106301e-02
0	13	-1.160000	-0.870000	2.084250	0.54000000	+2.1098181465e-02
0	14	-2.030000	-0.000000	2.084250	0.54000000	+2.1661444954e-02
0	15	-1.160000	-0.290000	2.084250	0.54000000	+2.1280527762e-02
0	16	-0.000000	-1.450000	2.084250	0.54000000	+2.0726535211e-02
0	17	0.000000	-0.870000	2.084250	0.54000000	+2.0872339885e-02
0	18	-0.000000	-0.290000	2.084250	0.54000000	+2.1135046258e-02
0	19	1.160000	-2.030000	2.084250	0.54000000	+2.0762274895e-02
0	20	2.030000	-1.740000	2.084250	0.54000000	+2.0894962316e-02
0	21	1.160000	-1.450000	2.084250	0.54000000	+2.0664089207e-02
0	22	1.160000	-0.870000	2.084250	0.54000000	+2.0730610371e-02
0	23	1.160000	-0.290000	2.084250	0.54000000	+2.0987932670e-02
0	24	2.030000	-0.580000	2.084250	0.54000000	+2.1025501033e-02
0	25	-1.160000	0.290000	2.084250	0.54000000	+2.1501510390e-02
0	26	-2.030000	1.160000	2.084250	0.54000000	+2.2056807823e-02
0	27	-1.160000	0.870000	2.084250	0.54000000	+2.1665224003e-02
0	28	-1.160000	1.450000	2.084250	0.54000000	+2.1972015528e-02
0	29	0.000000	0.290000	2.084250	0.54000000	+2.1329922044e-02
0	30	-0.000000	0.870000	2.084250	0.54000000	+2.1513476612e-02
0	31	0.000000	1.450000	2.084250	0.54000000	+2.1762448001e-02
0	32	1.160000	0.290000	2.084250	0.54000000	+2.1132384800e-02
0	33	2.030000	0.580000	2.084250	0.54000000	+2.1315494607e-02
0	34	1.160000	0.870000	2.084250	0.54000000	+2.1316483722e-02
0	35	1.160000	1.450000	2.084250	0.54000000	+2.1497446937e-02
0	36	0.088570	2.858995	2.084250	0.67225000	-2.2200926469e-02
0	37	2.030000	1.740000	2.084250	0.54000000	+2.1652376653e-02
0	38	1.450000	2.379622	2.084250	0.51850000	+1.4709356454e-02
1	44	-1.740000	-2.030000	2.684250	0.54000000	-6.1717204457e-03
1	45	-0.580000	-2.030000	2.684250	0.54000000	-5.7923394592e-03
1	46	0.580000	-2.030000	2.684250	0.54000000	-5.6313481447e-03
1	47	-1.740000	-1.450000	2.684250	0.54000000	-5.8945158835e-03
1	48	-1.740000	-0.870000	2.684250	0.54000000	-6.1272498337e-03
1	49	-0.580000	-1.450000	2.684250	0.54000000	-5.6677985879e-03
1	50	-0.580000	-0.870000	2.684250	0.54000000	-5.9073535857e-03
1	51	-1.740000	-0.290000	2.684250	0.54000000	-6.2861601984e-03
1	52	-1.740000	0.290000	2.684250	0.54000000	-6.4929448577e-03
1	53	-0.580000	-0.290000	2.684250	0.54000000	-6.1441766581e-03
1	54	0.580000	-1.450000	2.684250	0.54000000	-5.4949366062e-03
1	55	0.580000	-0.870000	2.684250	0.54000000	-5.6165637076e-03
1	56	0.580000	-0.290000	2.684250	0.54000000	-5.9284010470e-03
1	57	1.740000	-2.030000	2.684250	0.54000000	-5.5964450493e-03
1	58	1.740000	-1.450000	2.684250	0.54000000	-5.5750930796e-03
1	59	1.740000	-0.870000	2.684250	0.54000000	-5.5316729855e-03
1	60	1.740000	-0.290000	2.684250	0.54000000	-5.7862099653e-03
1	61	-0.580000	0.290000	2.684250	0.54000000	-6.4257386885e-03
1	62	-1.740000	0.870000	2.684250	0.54000000	-6.8576261766e-03
1	63	-1.740000	1.450000	2.684250	0.54000000	-7.0890067759e-03
1	64	-0.580000	0.870000	2.684250	0.54000000	-6.6249732312e-03
1	65	-0.580000	1.450000	2.684250	0.54000000	-7.0137372522e-03
1	66	0.580000	0.290000	2.684250	0.54000000	-6.1746390641e-03
1	67	0.580000	0.870000	2.684250	0.54000000	-6.3948651910e-03
1	68	0.580000	1.450000	2.684250	0.54000000	-6.7126784447e-03
1	69	1.740000	0.290000	2.684250	0.54000000	-6.0016216656e-03
1	70	1.740000	0.870000	2.684250	0.54000000	-6.1198269805e-03
1	71	1.740000	1.450000	2.684250	0.54000000	-6.5247521871e-03
1	72	1.740000	2.030000	2.684250	0.54000000	-6.8707555753e-03
1	74	0.870000	2.300000	3.184250	0.12000000	+2.3941388903e-05
1	75	1.450000	1.470862	3.184250	0.67900000	+5.1504788556e-03
1	76	-1.450000	-0.580000	3.184250	0.54000000	+1.6210670281e-02
1	77	-0.580000	-0.870000	3.184250	0.54000000	+1.6207954022e-02
1	78	-0.580000	-0.290000	3.184250	0.54000000	+1.6071664242e-02
1	79	0.290000	-1.435162	3.184250	0.65650000	+1.1539642240e-02
1	80	0.580000	-0.290000	3.184250	0.54000000	+1.6217492734e-02
1	81	1.450000	0.000000	3.184250	0.54000000	+1.6376311378e-02
1	82	-1.450000	0.580000	3.184250	0.54000000	+1.6153119097e-02
1	83	-0.580000	0.290000	3.184250	0.54000000	+1.6048683270e-02
1	84	-0.580000	0.870000	3.184250	0.54000000	+1.6098735692e-02
1	85	0.580000	0.290000	3.184250	0.54000000	+1.6138044094e-02
1	86	0.580000	0.870000	3.184250	0.54000000	+1.6218414034e-02

Cer.	Face ID	x	y	z	Area	Heat (W)
2	92	-1.160000	-0.870000	3.784250	0.54000000	-4.1229763184e-03
2	93	-1.160000	-0.290000	3.784250	0.54000000	-4.0325885849e-03
2	94	0.000000	-0.870000	3.784250	0.54000000	-4.3372223253e-03
2	95	-0.000000	-0.290000	3.784250	0.54000000	-4.1255544021e-03
2	96	1.160000	-0.290000	3.784250	0.54000000	-4.2477066490e-03
2	97	-1.160000	0.290000	3.784250	0.54000000	-3.9991911145e-03
2	98	-1.160000	0.870000	3.784250	0.54000000	-4.0132490723e-03
2	99	0.000000	0.290000	3.784250	0.54000000	-4.0452781812e-03
2	100	1.160000	0.290000	3.784250	0.54000000	-4.1617896577e-03
2	101	-0.000000	0.870000	3.784250	0.54000000	-4.1215621922e-03
2	102	1.160000	0.870000	3.784250	0.54000000	-4.3855401752e-03
2	104	0.870000	0.829062	4.284250	0.64000000	+8.5720985048e-03
2	105	0.692720	-0.929413	4.284250	0.81350000	+3.2580848072e-03
2	106	-0.000000	-0.290000	4.284250	0.54000000	+1.1238504436e-02
2	107	-0.870000	0.000000	4.284250	0.54000000	+1.1290111066e-02
2	108	0.000000	0.290000	4.284250	0.54000000	+1.1233859859e-02
3	114	0.580000	0.290000	4.884250	0.54000000	-1.2327805666e-03
3	115	-0.580000	-0.290000	4.884250	0.54000000	-1.2229792254e-03
3	116	0.580000	-0.290000	4.884250	0.54000000	-1.2662612022e-03
3	117	-0.580000	0.290000	4.884250	0.54000000	-1.2279447029e-03
3	119	-0.000000	-0.000000	5.384250	4.41000000	+4.9499656971e-03

D Verification boundaries and remaining work

Technical claim	Actual status	Appropriate requirement for improvement
824-solid replacement V3 CAD	Conditional physical-design PASS	Measured forming, solder, current and reliability capability
Native pin-to-pin topology	88/88 legs PASS	Finite real current density, resistance and contact temperature fields
Global 430-domain R3.9 mesh	Geometric PASS	Improve worst elements and prove solver conditioning/convergence
Original full-solid electrical Gate B	Historical FAIL/STOP	Qualify original raw-gradient tests on a viable mesh
Full 430-domain electrothermal PDE	NOT RUN	Integrated metal/contact/leg/ceramic field solution
V3.5 Cu and source-lead hybrid at 0.4 A	Conditional numerical PASS	Solder/foil interface and plated metal-sheet laws, then current/load response
Rarefied gas and radiation	Effective load model	Native exposed-surface gas/gray/spectral physics
Real thermoelectric grades	Unidentified	Bounded synthetic studies or actual module certificates
HgCdTe photodetection	No carrier/optical PDE	Detector noise/spectral/bias physics if needed
As-built product prediction	Unvalidated	Device measurements; do not claim manufacturer equivalence

Publication policy. The original 38-page Revision 3 remains a sealed separate historical methodology reference. Its later 43-page interim source-mesh integration is likewise archived. This document describes the newer replacement CAD and the most recent completed running hybrid with the unmodeled internal copper paths prominently disclosed. All figures and numerical tables derive from existing saved evidence, and no new physics calculation was performed for this publication.