HgCdTe bias heating coupled to the three-stage TEC

0.400 A TEC | 300 K mounting reservoir | 100 Pa krypton | absorbed optical heat = 0.50 mW

Detector operating temperature

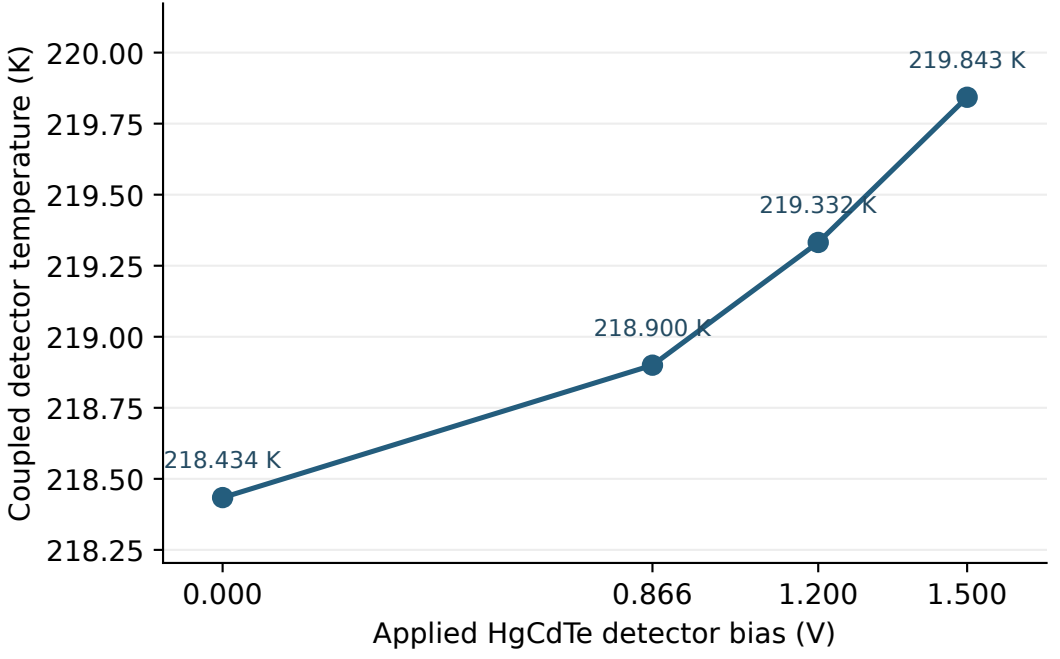

Temperature-dependent bias power

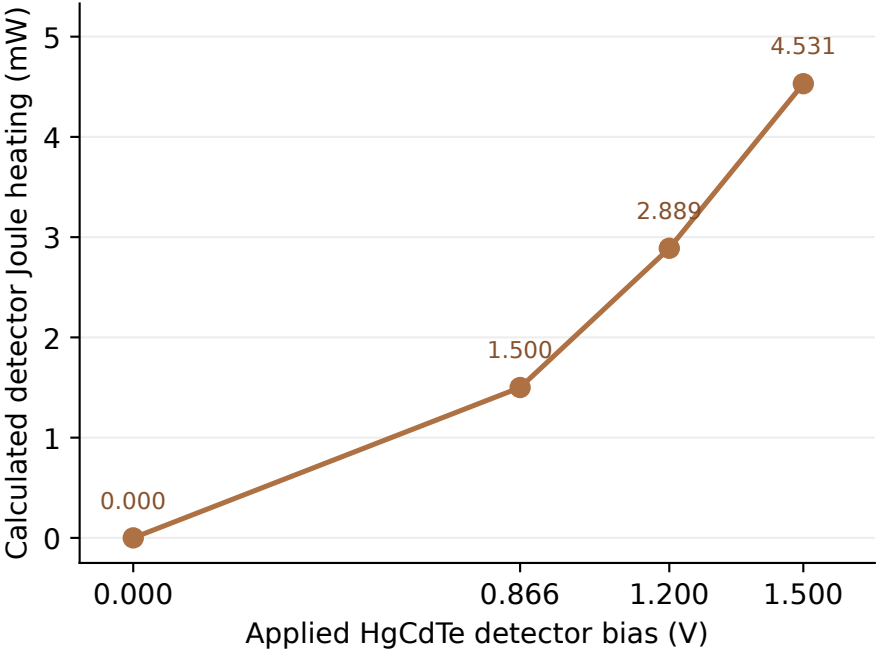

Electrical proxy: R(218.90 K) = 500 Ω; effective activation 30 meV. These are unmeasured design assumptions.
Each point is a nonlinear, separately audited whole-device solution; no responsivity, noise or measured detector I–V.