Thermal load sensitivity at fixed 0.400 A

300 K sink | 100 Pa krypton | no device electrical or optical response fitted

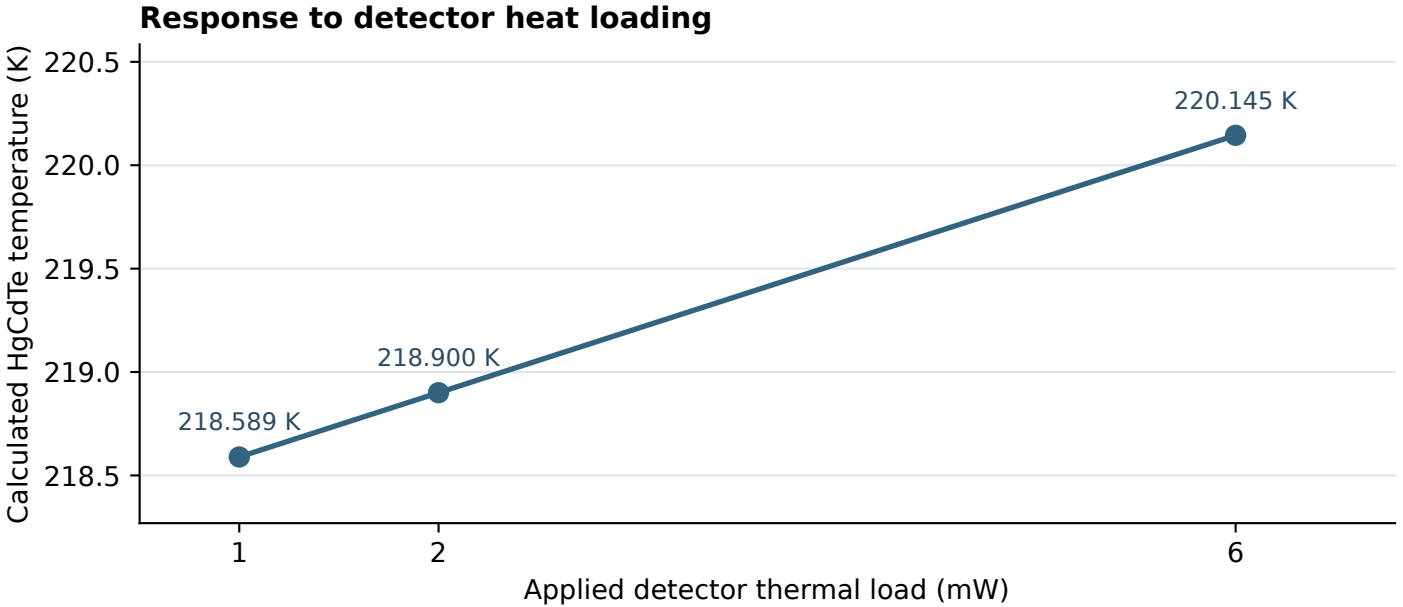

Secant response across 1–6 mW: 0.311 K/mW (311 K/W).

Three independently converged synthetic cases; source detector heating is externally specified, not HgCdTe self-heating.