


ITN Final Skills Exam (PTSA)

ITN (Version 7.00) Final PT Skills Assessment (PTSA) Exam Answers

Topology

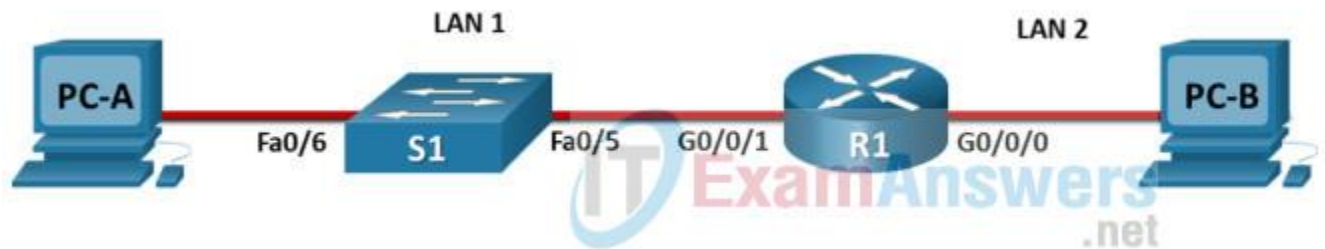

ITN Final PT Skills Assessment (PTSA)

Device Names Table

You will receive one of three possible scenarios. In order to use the logical topology diagram that is provided with the instructions, use the device names in the Device Names Table.


Topology Diagram Name	Your Scenario Name
R1	Central-RT
S1	Central-SW
PC-A	User-A
PC-B	User-B

Addressing Requirements Table

Item	Requirements
Network Address	192.168.10.0/24
LAN 1 subnet host requirements	100
LAN 2 subnet host requirements	50

Item	Requirements
Central-RT G0/0/1	First host address in LAN 1 subnet
Central-RT G0/0/0	First host address in LAN 2 subnet
Central-SW SVI	Second host address in LAN 1 subnet
User-A	Last host address in LAN 1 subnet
User-B	Last host address in LAN 2 subnet

ITN Final PT Skills Assessment (PTSA)

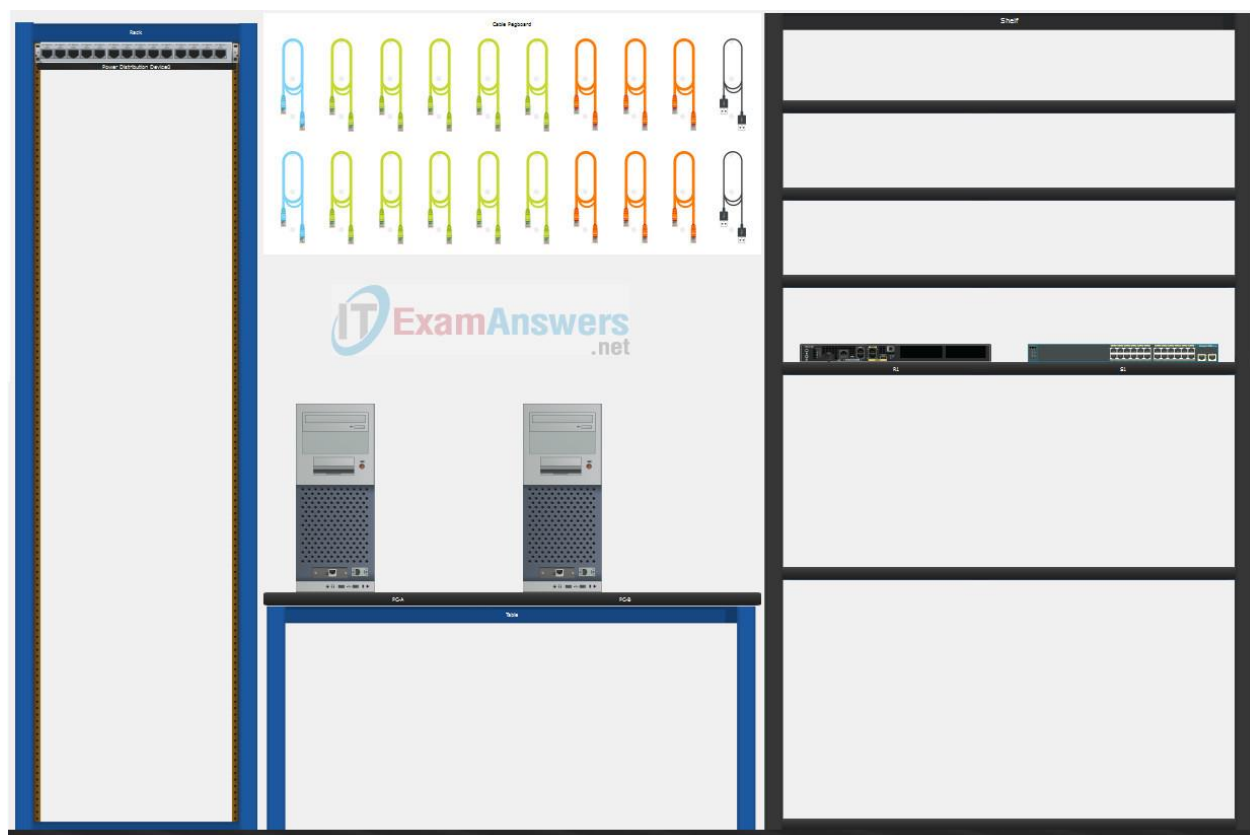

A few things to keep in mind while completing this activity:

1. Do not use the browser **Back** button or close or reload any exam windows during the exam.
2. Do not close Packet Tracer when you are done. It will close automatically.
3. Click the **Submit Assessment** button in the browser window to submit your work.

Assessment Objectives

- **Part 1: Build the Network**
- **Part 2: Develop an IP Addressing Scheme**
- **Part 3: Configure Basic Device Settings**
- **Part 4: Configure Security Settings on Central-RT and Central-SW**
- **Part 5: Configure the Hosts and Verify Connectivity**

Instructions

In this assessment you will configure the **Central-RT** router and **Central-SW** switch, as you have done in the activities in this course. You will also connect two PCs using a switch and a router that are in the main wiring closet. You will subnet the **192.168.10.0/24** network to provide IPv4 addresses for two subnets that will support the required number of hosts. The larger subnet (LAN 1) requires **100** hosts and the smaller subnet (LAN 2) requires **50** hosts.

Part 1: Build the Network

- a. Build the network according to the logical topology by placing the required equipment in the wiring closet equipment rack.
- b. Cable the network devices in the closet as shown in the topology diagram.
- c. Connect the hosts as shown in the topology diagram.

Part 2: Develop an IP Addressing Scheme

In this part of the assessment, you will develop an IP addressing scheme. You will subnet an IPv4 network to create two subnets with the required number of hosts. You will also subnet an IPv6 network. You will then assign the addresses according to the requirements below.

Work with the following information:

- IPv4 Network: **192.168.10.0/24**
 - Required number of hosts in IPv4 LAN 1: **100**
 - Required number of hosts in IPv4 LAN 2: **50**
- a. Record your subnet assignments according to the following requirements.

1) Assign the first IPv4 address of each subnet to a router interface

- LAN 1 is hosted on **Central-RT G0/0/1**
- LAN 2 is hosted on **Central-RT G0/0/0**

2) Assign the last IPv4 address of each subnet to the PC NIC.

3) Assign the second IPv4 address of LAN 1 to **Central-SW** SVI.

Part 3: Configure Basic Device Settings

Network devices must be configured over a direct console connection.
Connectivity between the hosts should be established.

Step 1: Configure Basic Settings

- Disable DNS lookup on **Central-RT** and **Central-SW**
- Configure router hostname using the name **Central-RT**.
- Configure switch hostname using the name **Central-SW**.
- Configure an appropriate banner on **Central-RT** and **Central-SW**.
- Allow console logins with the password **C@nsPassw!**

Step 2: Configure Interfaces

- Configure **Central-RT** G0/0/0 and G0/0/1 interfaces using the addressing from the previous part of this assessment:
 - Interface description
 - IPv4 address / subnet mask
- Configure the **Central-SW** VLAN 1 SVI interface using the addressing from the previous part of this assessment:
 - Interface description
 - IPv4 address / subnet mask
 - The switch should be reachable from devices on other networks.

Part 4: Configure Security Settings on Central-RT and Central-SW

Step 1: Configure enhanced password security

- Configure **DontTellAnyone** as the encrypted privileged EXEC password
- Encrypt all plaintext passwords
- Set minimum password length to **10** on **Central-RT**.

Step 2: Configure SSH on Central-RT and Central-SW

- Configure **netsec.com** as the domain name
- Configure a local user netadmin with the secret password **Ci\$co12345**
- Set login on vty lines to use local database.
- Configure the vty lines to accept SSH access only.
- Generate an RSA crypto key using 1024 bits modulus.

Step 3: Secure switch ports on Central-SW

- Shut down **all** unused ports on **Central-SW**.
- Enter descriptions for all unused switch ports to indicate that they are intentionally shutdown.

Part 5: Configure the Hosts and Verify Connectivity


Configure both hosts with the IPv4 addresses that were assigned in Part 2 of this assessment.

ID: 011


Answers Key

Part 1: Build the Network


Placing Switch Central-SW and Router Central-RT to wiring closet equipment rack.

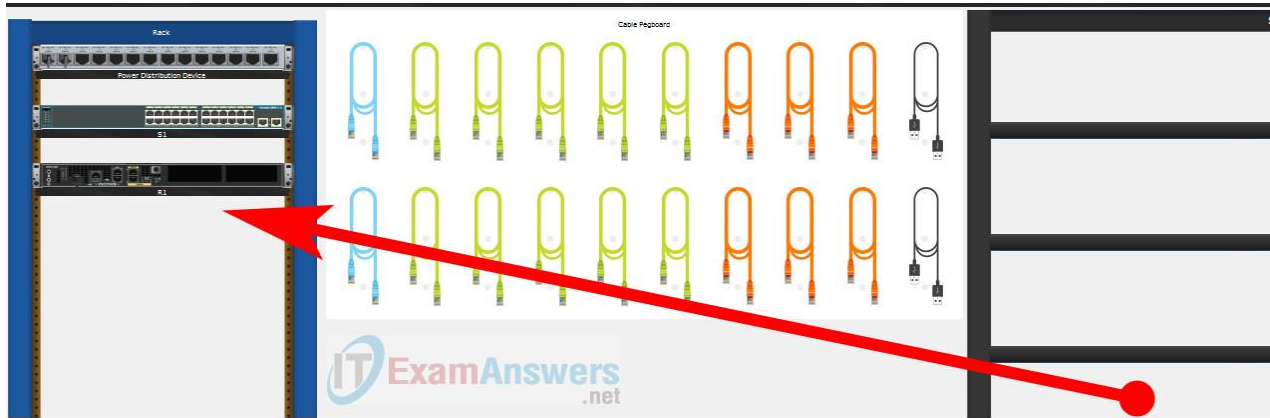


Using **Copper Straight-Through** cable to connect **User-A** (FastEthernet0 port) and **Central-SW** (FastEthernet0/6 port)

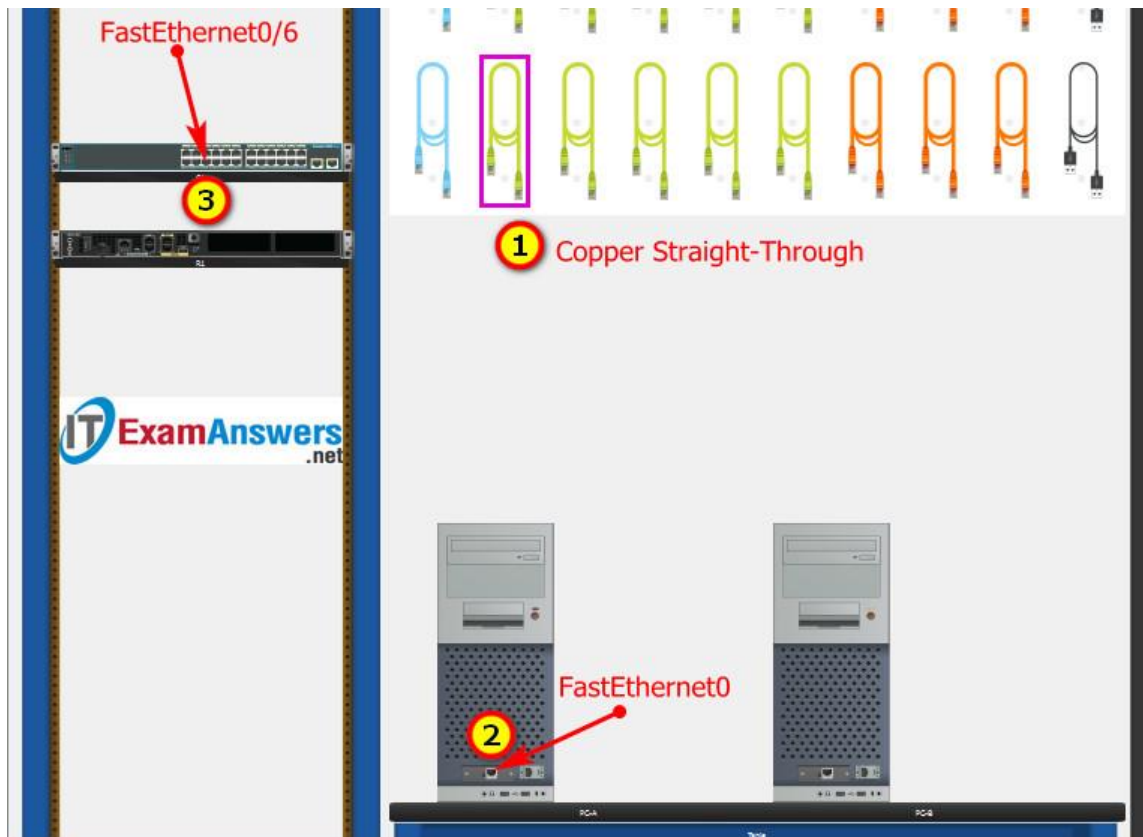


Same as above, using **Copper Straight-Through** cable to connect all devices as shown in the topology diagram.

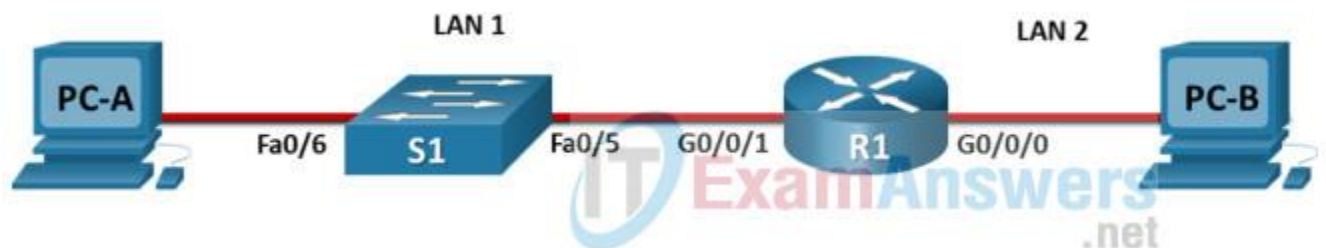

ITN Final PT Skills Assessment (PTSA)

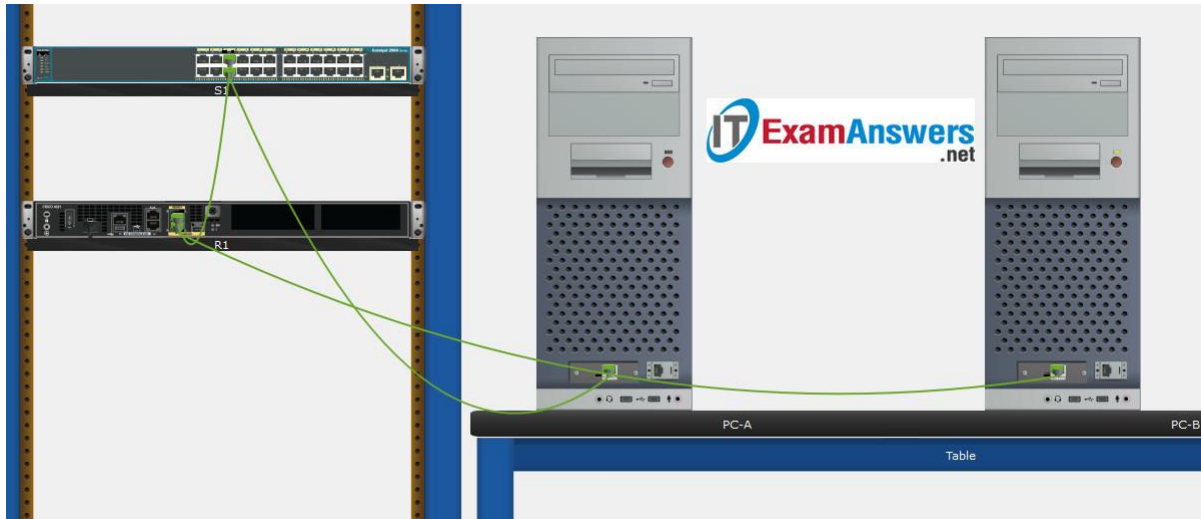

Turn-on PCs and Router Central-RT

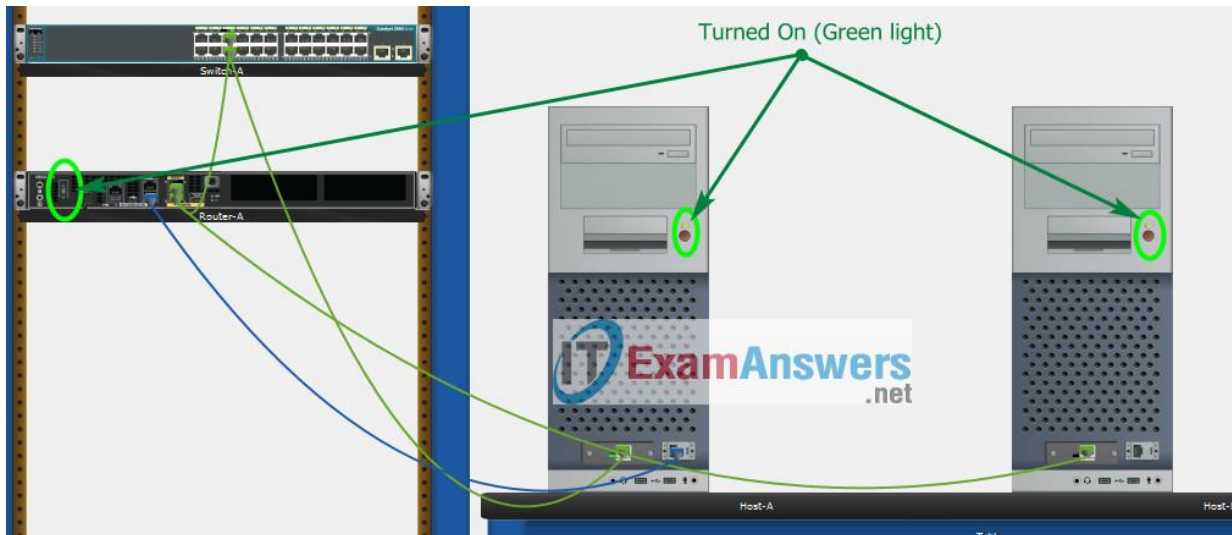


Part 2: Develop an IP Addressing Scheme


Item	Requirements	IPv4 Address
Network Address	192.168.10.0/24	
LAN 1 subnet host requirements	100	192.168.10.0/25 SM: 255.255.255.128
LAN 2 subnet host requirements	50	192.168.10.128/26 SM: 255.255.255.192

Item	Requirements	IPv4 Address
Central-RT G0/0/1	First host address in LAN 1 subnet	192.168.10.1
Central-RT G0/0/0	First host address in LAN 2 subnet	192.168.10.129
Central-SW SVI	Second host address in LAN 1 subnet	192.168.10.2
User-A	Last host address in LAN 1 subnet	192.168.10.126
User-B	Last host address in LAN 2 subnet	192.168.10.190

Using line console to connect User-A and Router

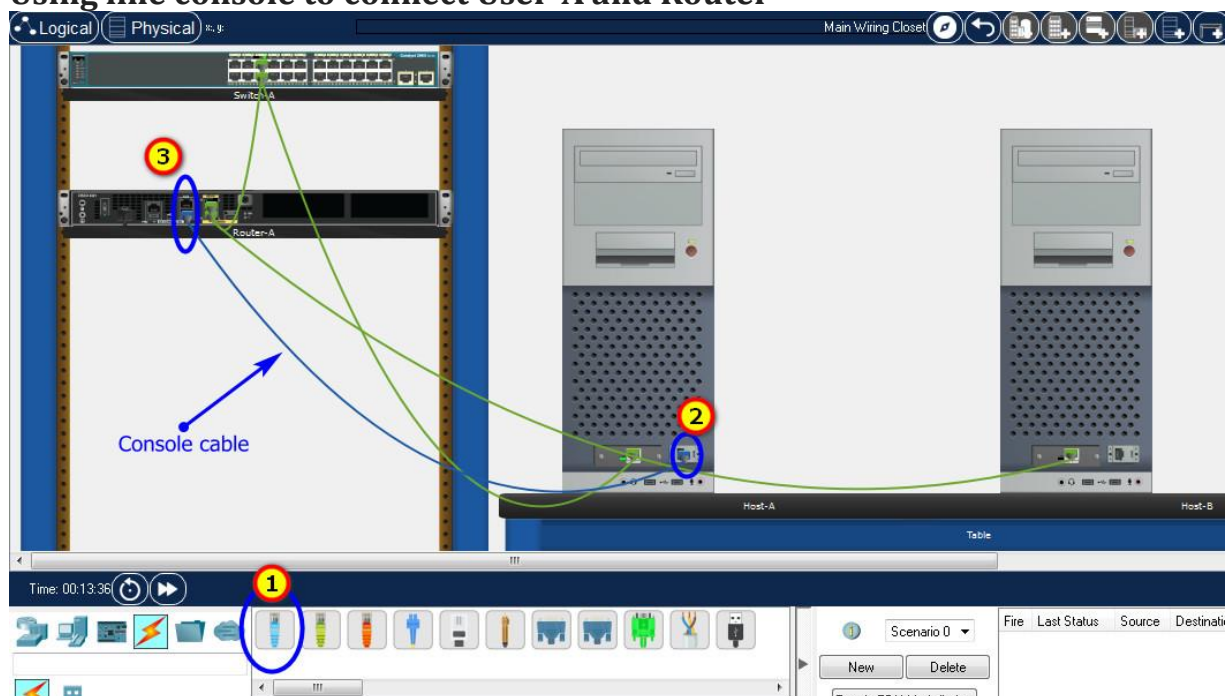

Click to **User-A** --> **Terminal** app --> click **OK**

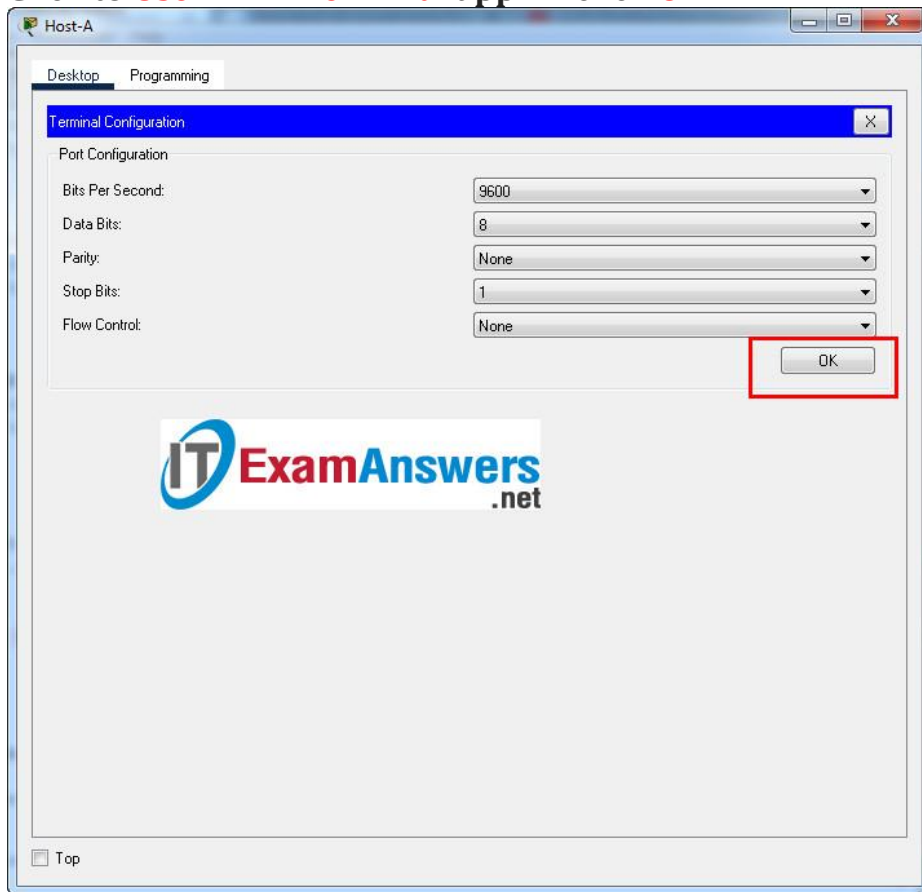

Router Central-RT configuration script

```
enable

configure terminal

no ip domain-lookup

hostname Central-RT

banner motd #Unauthorized access to this device is
prohibited!#

interface g0/0/0

description Connect to Subnet B

ip address 192.168.10.129 255.255.255.192

no shutdown
```

```
exit

interface g0/0/1
description Connect to Subnet A
ip address 192.168.10.1 255.255.255.128
no shutdown
exit

enable secret DontTellAnyone
service password-encryption
security passwords min-length 10

ip domain-name netsec.com
username netadmin secret Ci$co12345

line console 0
password C@nsPassw!
login
exit

line vty 0 15
transport input ssh
login local
exit


crypto key generate rsa
1024
exit
copy running-config startup-config
```

Configuration for Switch Central-SW

Then, using Console cable to connect User-B and Switch

To show Console port on Switch, Right click Switch --> Inspect Rear --> Console

port

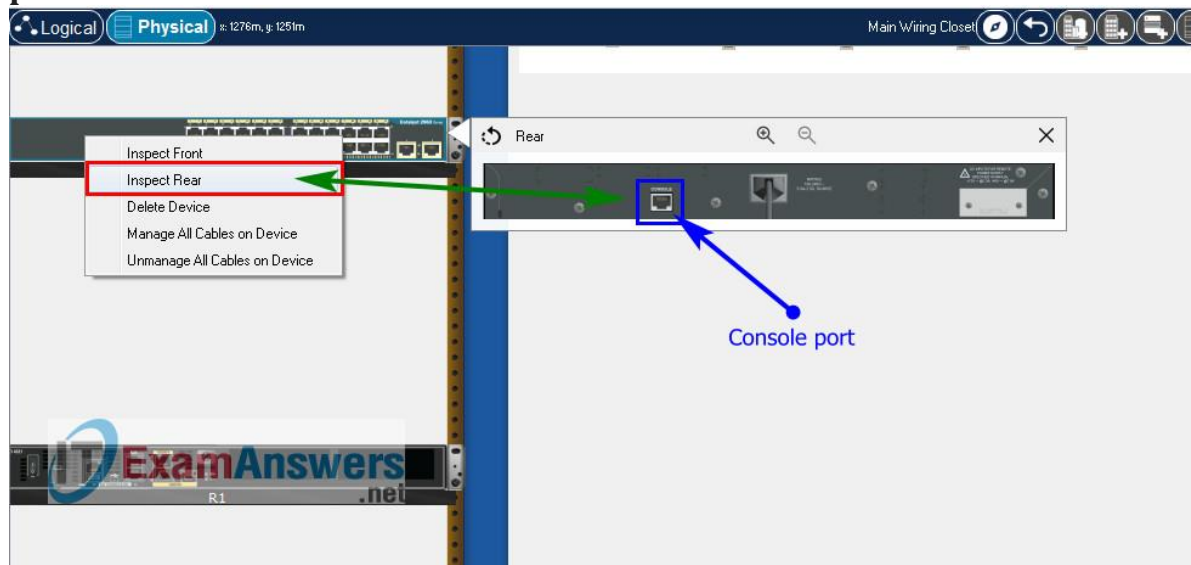

Switch Central-SW configuration script

```
enable

configure terminal

no ip domain-lookup

hostname Central-SW

banner motd #Unauthorized access to this device is
prohibited!#

interface vlan 1

description Switch Subnet A

ip address 192.168.10.2 255.255.255.128

no shutdown

exit

ip default-gateway 192.168.10.1
```

```
enable secret DontTellAnyone
service password-encryption

ip domain-name netsec.com
username netadmin secret Ci$co12345

line console 0
password C@nsPassw!
login
exit

line vty 0 15
transport input ssh
login local
exit

crypto key generate rsa
1024

int range f0/1 - 4, f0/7 - 24, g0/1 - 2
description Unused switch ports
shutdown

end
```

```
copy running-config startup-config
```

Part 5: Configure the Hosts and Verify Connectivity

On PCs, go to **Desktop** tab --> **IP Configuration** menu

PC-A Network Configuration	
IPv4 Address	192.168.10.126
Subnet Mask	255.255.255.128
IPv4 Default Gateway	192.168.10.1

The screenshot shows the 'PC-A' configuration window with the 'Desktop' tab selected. The 'IP Configuration' menu is open, showing the 'FastEthernet0' interface. The 'IP Configuration' section is active, with 'Static' selected. The fields are filled with the following values: IPv4 Address: 192.168.10.126, Subnet Mask: 255.255.255.128, Default Gateway: 192.168.10.1, and DNS Server: 0.0.0.0. The 'IPv6 Configuration' section is also visible, with 'Static' selected and the Link Local Address set to FE80::202:17FF:FE19:59A7. The '802.1X' section is expanded, showing 'Use 802.1X Security' checked, 'Authentication' set to MD5, and empty fields for 'Username' and 'Password'. A 'Top' button is located at the bottom left of the window.

Interface	FastEthernet0
IP Configuration	
<input type="radio"/> DHCP	<input checked="" type="radio"/> Static
IPv4 Address	192.168.10.126
Subnet Mask	255.255.255.128
Default Gateway	192.168.10.1
DNS Server	0.0.0.0
IPv6 Configuration	
<input type="radio"/> Automatic	<input checked="" type="radio"/> Static
IPv6 Address	/
Link Local Address	FE80::202:17FF:FE19:59A7
Default Gateway	
DNS Server	
802.1X	
<input checked="" type="checkbox"/> Use 802.1X Security	
Authentication	MD5
Username	
Password	

☐ Top

PC-B Network Configuration	
IPv4 Address	192.168.10.190
Subnet Mask	255.255.255.192
IPv4 Default Gateway	192.168.10.129

PC-B

Desktop

Programming

IP Configuration

Interface

FastEthernet0

IP Configuration

DHCP

Static

IPv4 Address

192.168.10.190

Subnet Mask

255.255.255.192

Default Gateway

192.168.10.129

DNS Server

0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address

/

Link Local Address

FE80::20C:CFFF:FE49:C2BD

Default Gateway

DNS Server

802.1X

Use 802.1X Security

Authentication

MD5

Username

Password

Top