

1 2 3 4 5 6 7 8 9 10 11

A

IDC vom Mainboard (Belegung Spec 2.4)


1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30

5V GND 3V3 MOT1A MOT2A MOT3A MOT4A GND FADER1_WIPER FADER3_WIPER GND I2C_SCL SPI_MOSI SPI_DC BELLY_BI_PWM

5V GND 3V3 MOT1B MOT2B MOT3B MOT4B GND FADER2_WIPER FADER4_WIPER I2C_SDA IO_INT SPI_SCK CS_BELLY GND

B


MCP23017 (0x20): Tasten 1–10 gegen GND (interne Pull-ups), Encoder, DISP_RST, Backlight-Enable; INTA -> IO_INT

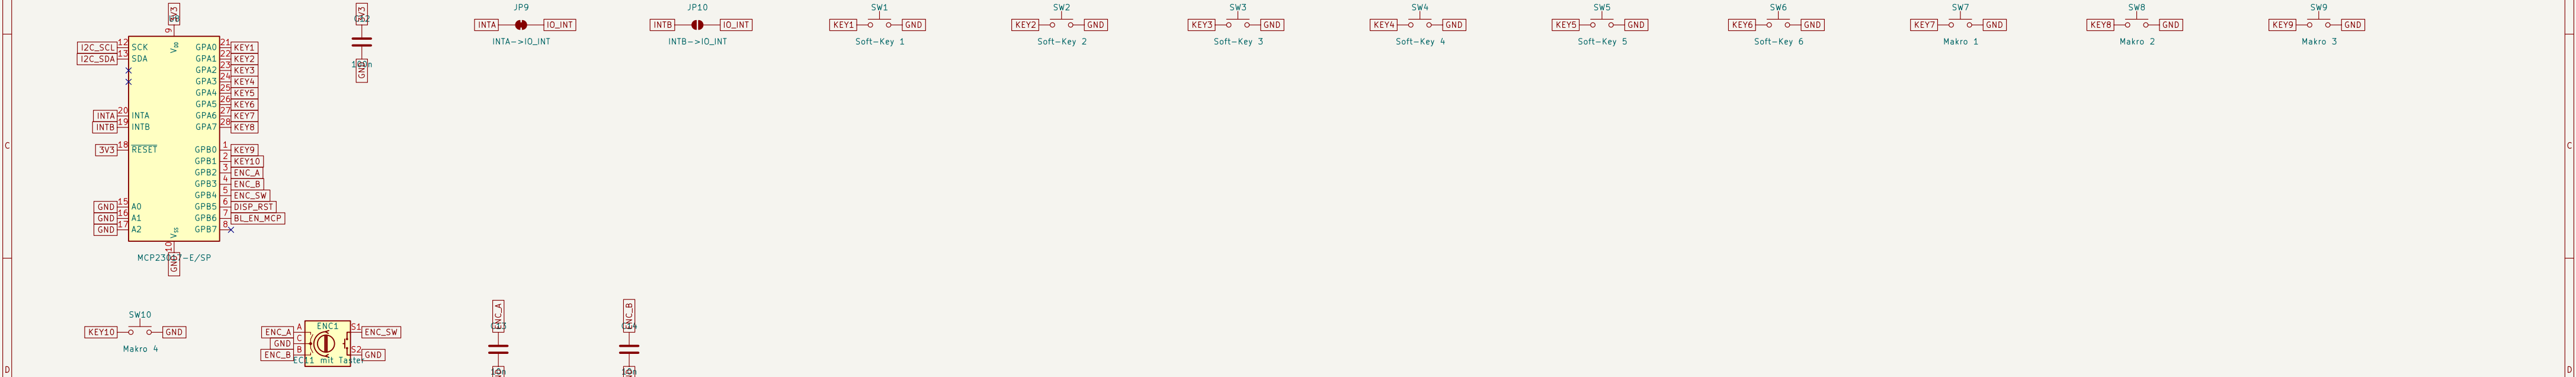

Bauch-Display ILI9341 2.8in SPI (MSP2807, 14-Pin, Header links); Backlight 150 mA: High-Side BC327 via BC337, Quelle JP11 (1=MCP GPB6, 3=GPI045-PWM)



Fader X32 (panel-mount, Drahte an Stiftheilen): Motor auf IDC, Schleifer ueber RC 1k/100n, Touch auf MPR121, E0-3

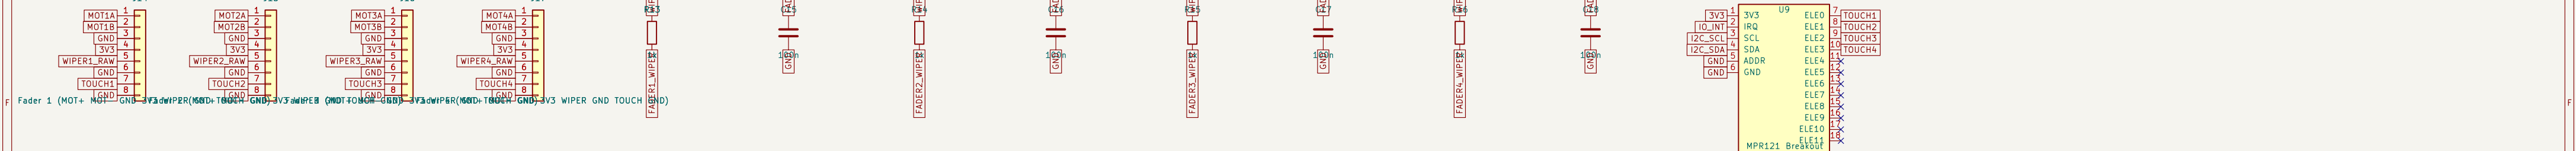

Mechanik: 4 Ecken + 4 Display-Abstandshalter (M3 x 11 mm, Raster 76,08 x 44)

