
ME2201-Kinematics and Dynamics of Machinery

Mathematical Modelling of Parametric Tooth Profile of Spur Gears

Kalisytharth S K, ME19B121

Expected Output: 20 Toothed Involute Spur Gear

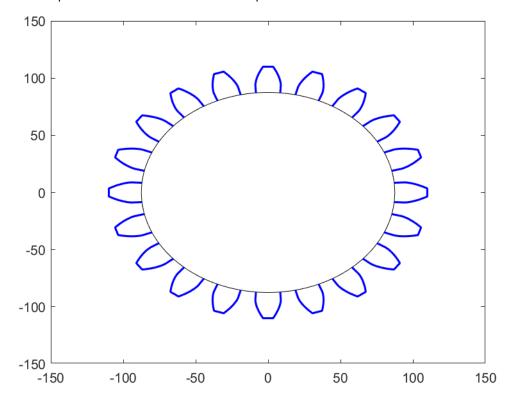

The Code:

```
%Given values%
theta_press=20*pi/180;
N=20;
r_p=100;
%Relation between pitch radius and base radius
r_b=100*cos(theta_press);
%Initialising radius ranging from base radius circle to
addendum circle
r=linspace(r_b,r_p+10,100);
%Initializing empty varaibles
phi=zeros(1,100);
thick=zeros(1,100);
```

```
theta 1=zeros(1,100);
x = zeros(1, 100);
y = zeros(1, 100);
rot=2*pi/N; %Rotation need for 20 teeths (equal 18
degrees)
rot 90=pi/2; %Rotating by 90 degrees, since 4 teeth
subtend 90 degrees
%Rotation matrix for each part
M=[cos(rot) -sin(rot); sin(rot) cos(rot)]; % 4 teeth
M 90=[cos(rot 90) -sin(rot 90); sin(rot 90) cos(rot 90)];
% 20 teeth
%Loop that stores x and y values for one of the tooth's
involute profile
for i=1:100
   phi(i) = acos(r b/r(i));
    thick(i)=2*r(i).*((pi/(2*N))+tan(theta press)-
theta press-tan(phi(i))+phi(i));
    theta 1(i) = thick(i) / r(i);
    x(i) = r(i) * sin(theta 1(i)/2);
    y(i) = r(i) * cos(theta 1(i)/2);
end
plot(x, y)
non inv x=8.415 %x value at Intersection of dedendum
circle and Line tangent to involute (found by plotting)
%%Finding NON-INVOLUTE PART since dedendum circle radius
is less than base circle radius
Slope=(y(1)-y(2))/(x(1)-x(2)); %Finding slope using two
nearby points
line x=linspace(non inv x, x(1), 100);
line_y=Slope.*(line x-x(2))+y(2);
%Circular part of gear(dedendum circle)
Circ x=linspace(-x(1),-line y(1),50);
Circ y=sqrt((87.5^2)-Circ x.^2); %87.5 is dedendum
circle radius
%Circ x=0;
%Circ y=0;
%Concatenating all the parts(Involute, non-Involute
line, Quarter circle)
x = 90 = cat(2, line x, x, -fliplr(x), -fliplr(line x), Circ x);
```

```
y 90=cat(2,line y,y,fliplr(y),fliplr(line y),Circ y);
%Rotating x and y values 3 times to get the remaining
profile
%For 4 teeth
z1=M 90*[x 90;y 90];
z2=M 90*z1;
z3=M 90*z2;
hold on
%Final concatenation
x 90=cat(2, x 90, z1(1, :), z2(1, :), z3(1, :));
y = 90 = cat(2, y = 90, z1(2, :), z2(2, :), z3(2, :));
figure(1)
plot(x 90, y 90)
%For complete gear with 20 teeth
figure(2)
x=cat(2, line x, x, -fliplr(x), -fliplr(line x));
y=cat(2,line y,y,fliplr(y),fliplr(line y));
th = 0:pi/50:2*pi;
xunit = 87.5 * cos(th);
yunit = 87.5* \sin(th);
plot(xunit, yunit, 'black');
hold on
for i=1:20
    z=M*[x;y];
    plot(x,y,'b','Linewidth',1.5)
    hold on
    x=z(1,:);
    y=z(2,:);
%plot(x,y,'b','Linewidth',1.5);
hold on
xlim([-150, 150]);
ylim([-150, 150]);
```