



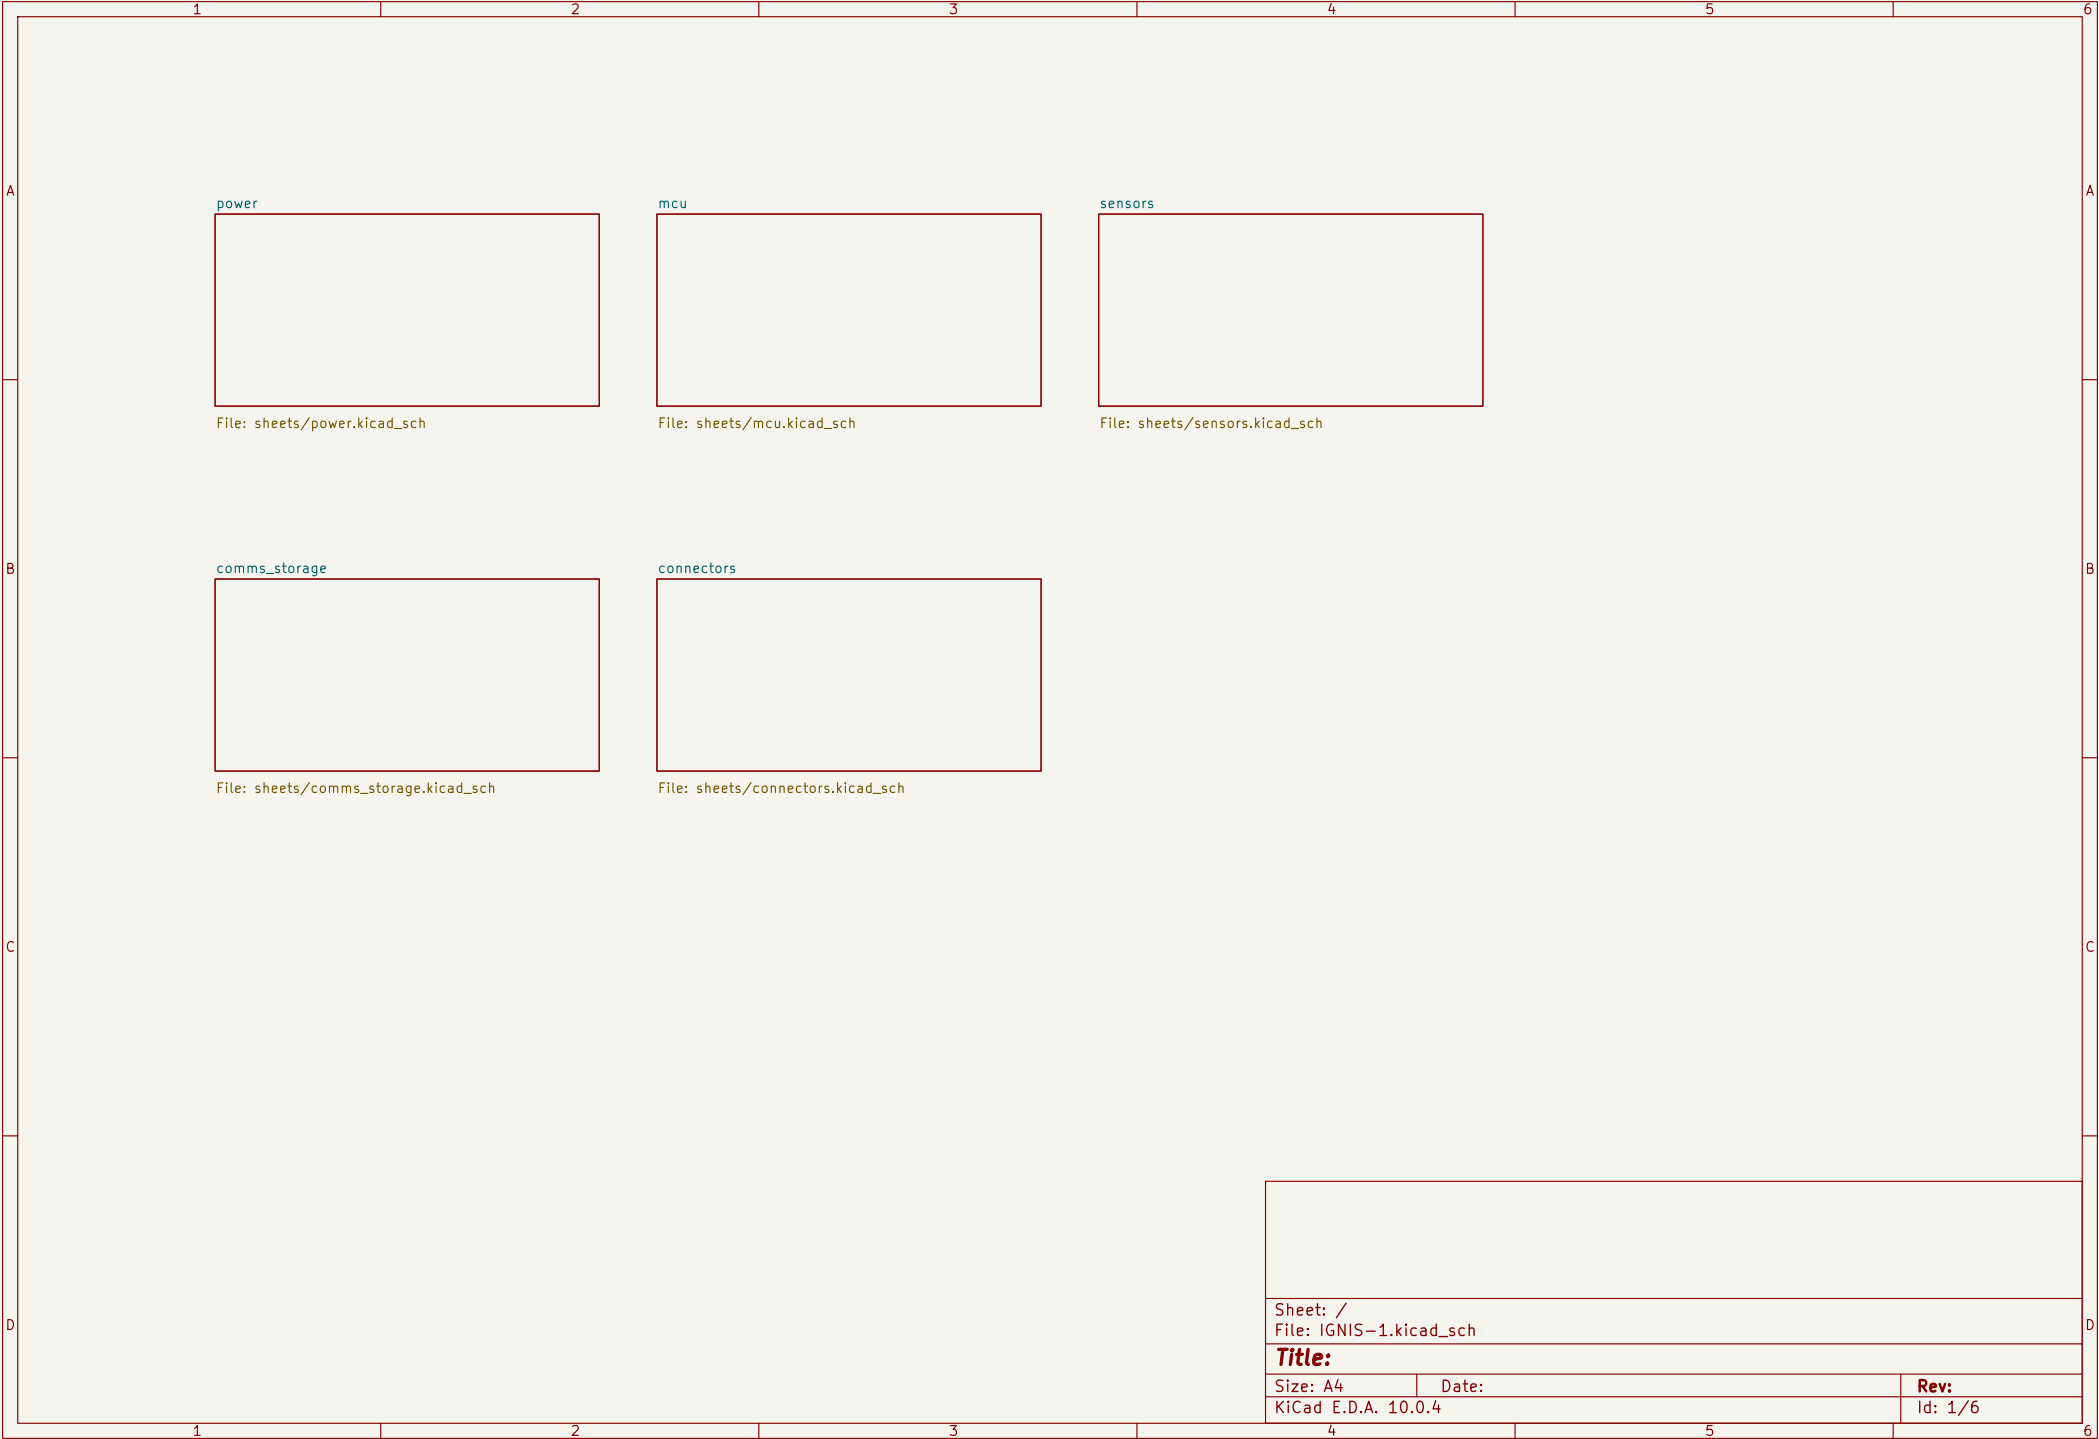

IGNIS-1 -- Alimentacion (LiPo 1S -> 3V3 buck-boost + 5V boost)
VSW = riel conmutado tras RBF+SW. 5V: MQ-135 heater + sensor PM.

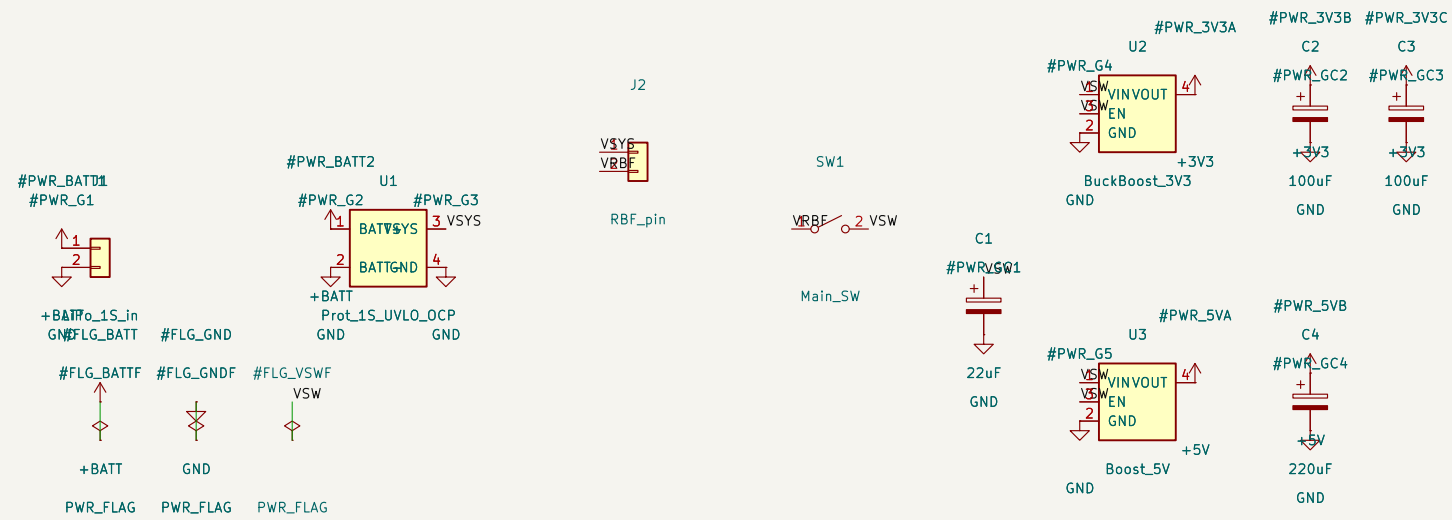

Sheet: /power/
File: power.kicad_sch


Title:

Size: A4
KiCad E.D.A. 10.0.4

Date:

Rev:
Id: 2/6

Flash 6-11, strapping 0/2/12/15, TX0/RX0 USB = NC. Pin-map = firmware.

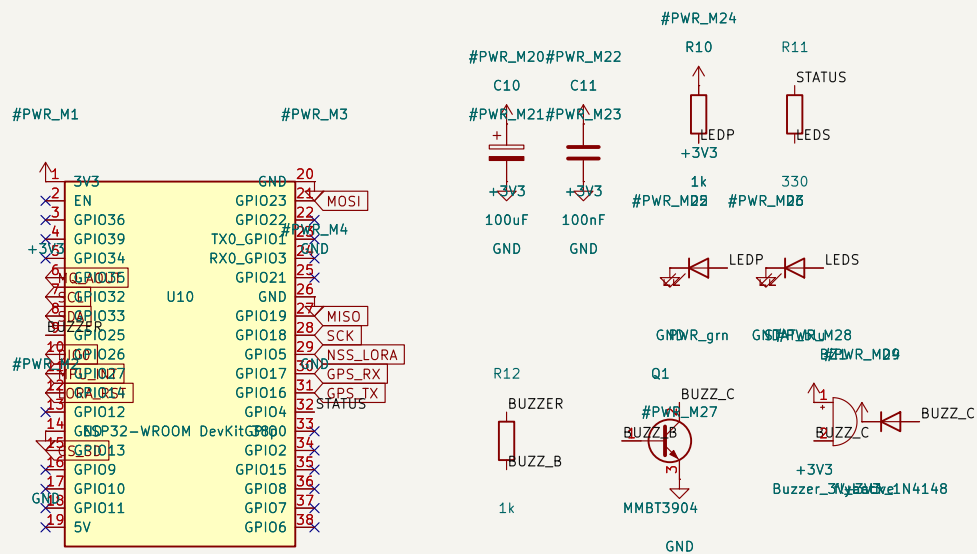


Title:

Date:

Id: 3/6

IGNIS-1 -- Sensores. I2C(BME280 0x76, MPU6050 0x68)+pull-ups 4.7k. MQ-135 A0 div 10k/15k -> 3.0V GPIO35.
MQ-135 y GPS a +5V; resto +3V3. Sin sensor PM (experimento auto-propuesto, removido por tamano/dato). GPS fp ZC323200.

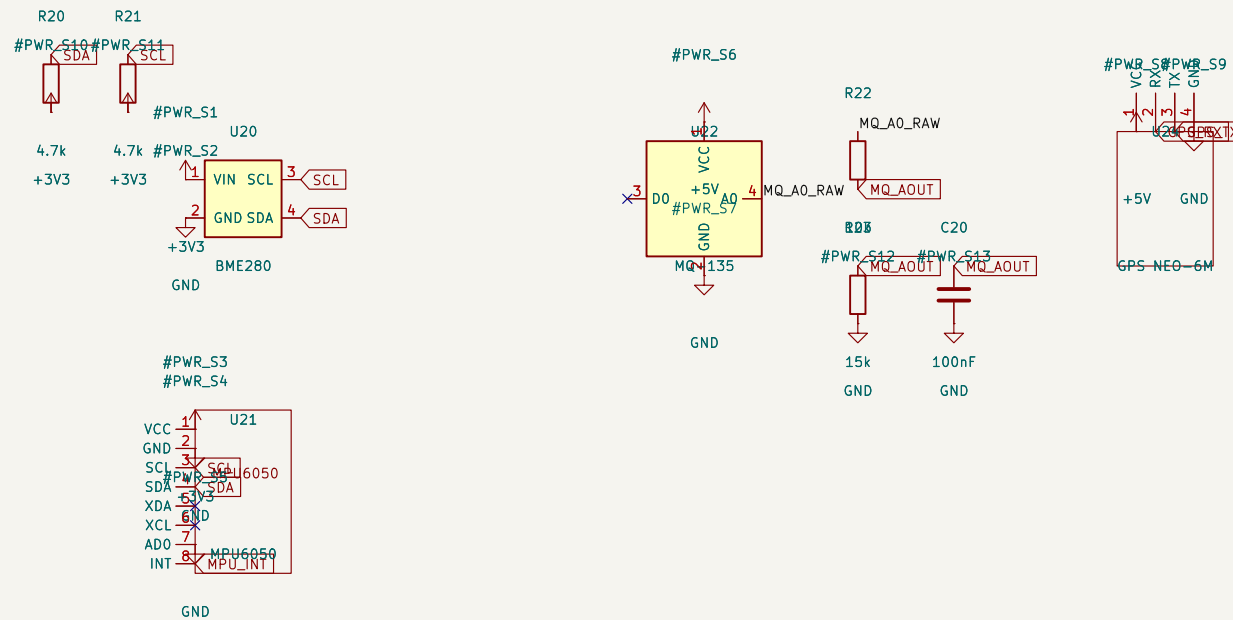

Sheet: /sensors/
File: sensors.kicad_sch


Title:

Size: A4
KiCad E.D.A. 10.0.4

Date:

Rev:
Id: 4/6

CS dedicados: NSS_LORA(GPIO5) + CS_SD(GPIO13). DI00(GPIO26), RST(GPIO14). Bulk LoRa = C3 en hoja power.

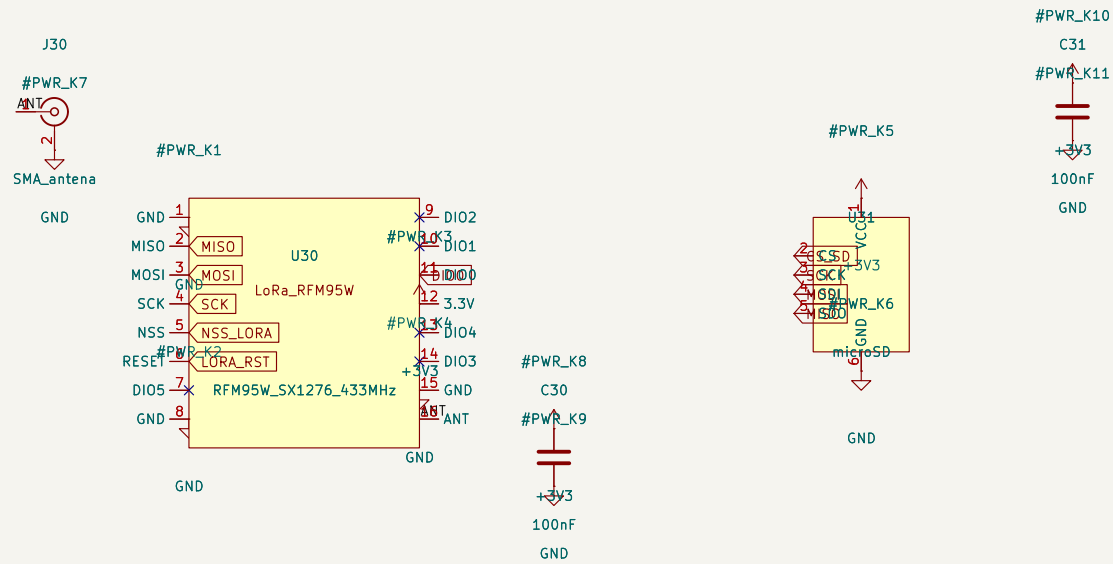

Sheet: /comms_storage/
File: comms_storage.kicad_sch

Title:

Size: A4	Date:
----------	-------

KiCad E.D.A. 10.0.4

Id: 5/6

1	2	3	4	5	6
A					A
B					B
C					C
D					D
1	2	3	4	5	6

Sheet: /connectors/ File: connectors.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.4		Id: 6/6