


IGNIS-1 -- Alimentacion (LiPo 1S -> 3V3 buck-boost + 5V boost)

VSW=1rel-cmdu (ESP32-D0R0R+ 50p, 5VSWQC) 136 heater pose 363r (R0.VIN/5V).

Flash 6-11, strapping 0/2/12/15, TX0/RX0 USB = NC. Pin-map = firmware.

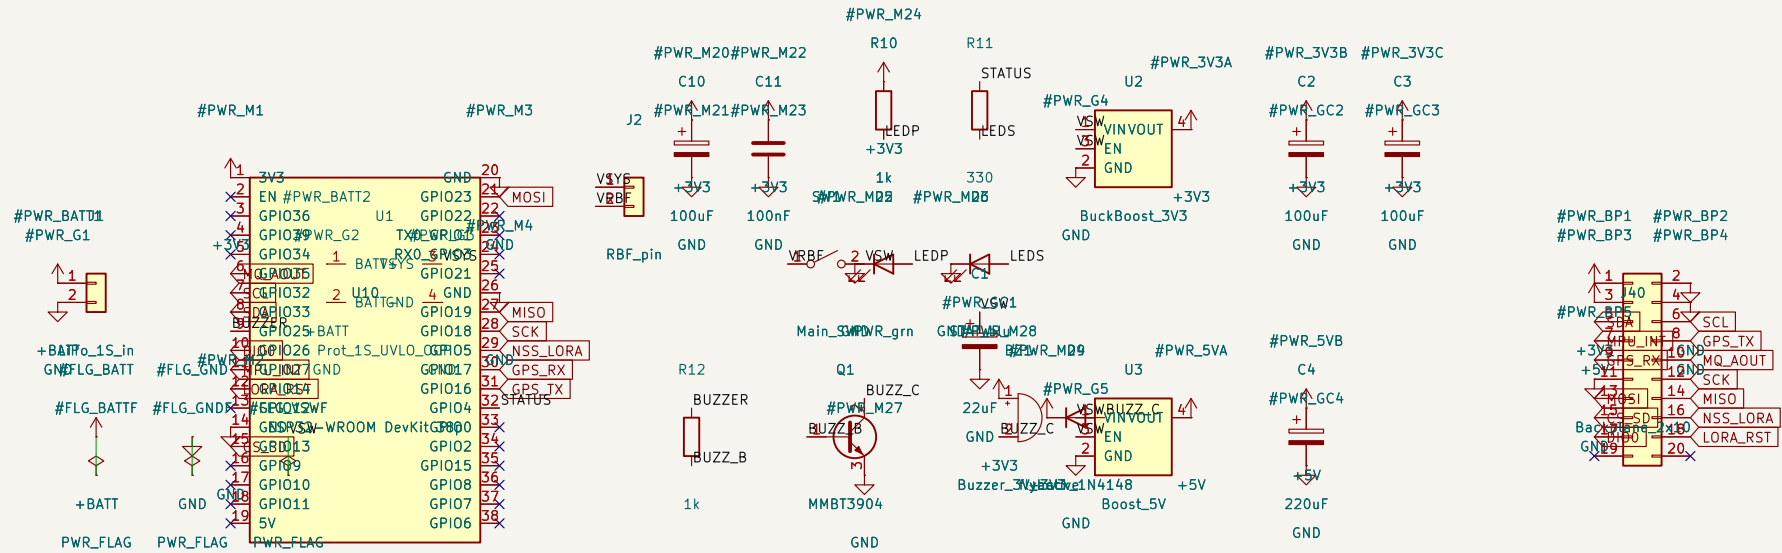

Sheet: /		File: cerebro.kicad_sch	
Title:			
Size: A4	Date:	Rev:	
KiCad E.D.A. 10.0.4		Id: 1/1	