

```
Terminal
R1 Win-1 Win-2
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#access-list 10 permit 10.0.0.10 0.0.0.0
R1(config)#int e0/0
R1(config-if)#ip access-group 10 in
R1(config-if)#show access list
^
% Invalid input detected at '^' marker.

R1(config-if)#exit
R1(config)#exit
R1#sh
*Sep 18 09:36:49.781: %SYS-5-CONFIG_I: Configured from console by console
R1#sh access list
% Ambiguous command: "sh access list"
R1#show access-list
Standard IP access list 10
  10 permit 10.0.0.10
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#access-list 10 permit 10.0.0.20 0.0.0.0
R1(config)#int e0/0
R1(config-if)#ip access-group 10 in
R1(config-if)#
R1(config-if)#
R1(config-if)#
R1(config-if)#
R1(config-if)#
R1(config-if)#exit
R1(config)#ex
% Ambiguous command: "ex"
R1(config)#exit
R1#
*Sep 18 09:41:20.336: %SYS-5-CONFIG_I: Configured from console by console
R1#show access-list
Standard IP access list 10
  10 permit 10.0.0.10 (25 matches)
  20 permit 10.0.0.20
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#no access-list 10
R1(config)#int e0/0
R1(config-if)#no ip access-group 10 in
R1(config-if)#
```

Terminal
Win-1 x Win-2 x R1 x R3 x R2 x R4 x
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is 20.0.0.2 to network 0.0.0.0

```
S* 0.0.0.0/0 [1/0] via 20.0.0.2
   10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   10.0.0.0/8 is directly connected, Ethernet0/0
L   10.0.0.1/32 is directly connected, Ethernet0/0
   20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   20.0.0.0/8 is directly connected, Ethernet0/1
L   20.0.0.1/32 is directly connected, Ethernet0/1
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#ip route 172.50.0.0 255.255.0.0 20.0.0.2
R1(config)#200.12.56.0 255.255.255.0
*Sep 18 11:12:58.119: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config)#200.12.56.0 255.255.255.0 20.0.0.2
      ^
% Invalid input detected at '^' marker.
```


```
R1(config)#ip route 200.12.56.0 255.255.255.0 20.0.0.2
R1(config)#s 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.0 0.0.0.0 eq 80
R1(config)#no access-list 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.0 0.0.0.0 s
R1(config)#s 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.10 0.0.0.0 eq 80
R1(config)#s 100 permit tcp 10.0.0.20 0.0.0.0 172.50.0.20 0.0.0.0 eq 80
R1(config)#int e0/0
R1(config-if)#ip access-group 100 in
R1(config-if)#exit
R1(config)#sh access-list
      ^
% Invalid input detected at '^' marker.
```


```
R1(config)#exit
R1#sh
*Sep 18 11:17:31.998: %SYS-5-CONFIG_I: Configured from console by console
R1#sh access-list
Extended IP access list 100
 10 permit tcp host 10.0.0.10 host 172.50.0.10 eq www
 20 permit tcp host 10.0.0.20 host 172.50.0.20 eq www
R1#conf t
```

```
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#s 100 permit 10.0.0.0 0.255.255.255 200.12.56.10 0.0.0.0 eq 53
access-list 100 permit 10.0.0.0 0.255.255.255 200.12.56.10 0.0.0.0 eq 53
      ^
% Invalid input detected at '^' marker.

R1(config)#s 100 permit 10.0.0.0 0.255.255.255 200.12.56.0 0.0.0.0 eq 53
access-list 100 permit 10.0.0.0 0.255.255.255 200.12.56.0 0.0.0.0 eq 53
      ^
% Invalid input detected at '^' marker.

R1(config)#s 100 permit udp 10.0.0.0 0.255.255.255 200.12.56.10 0.0.0.0 eq 53
R1(config)#
```

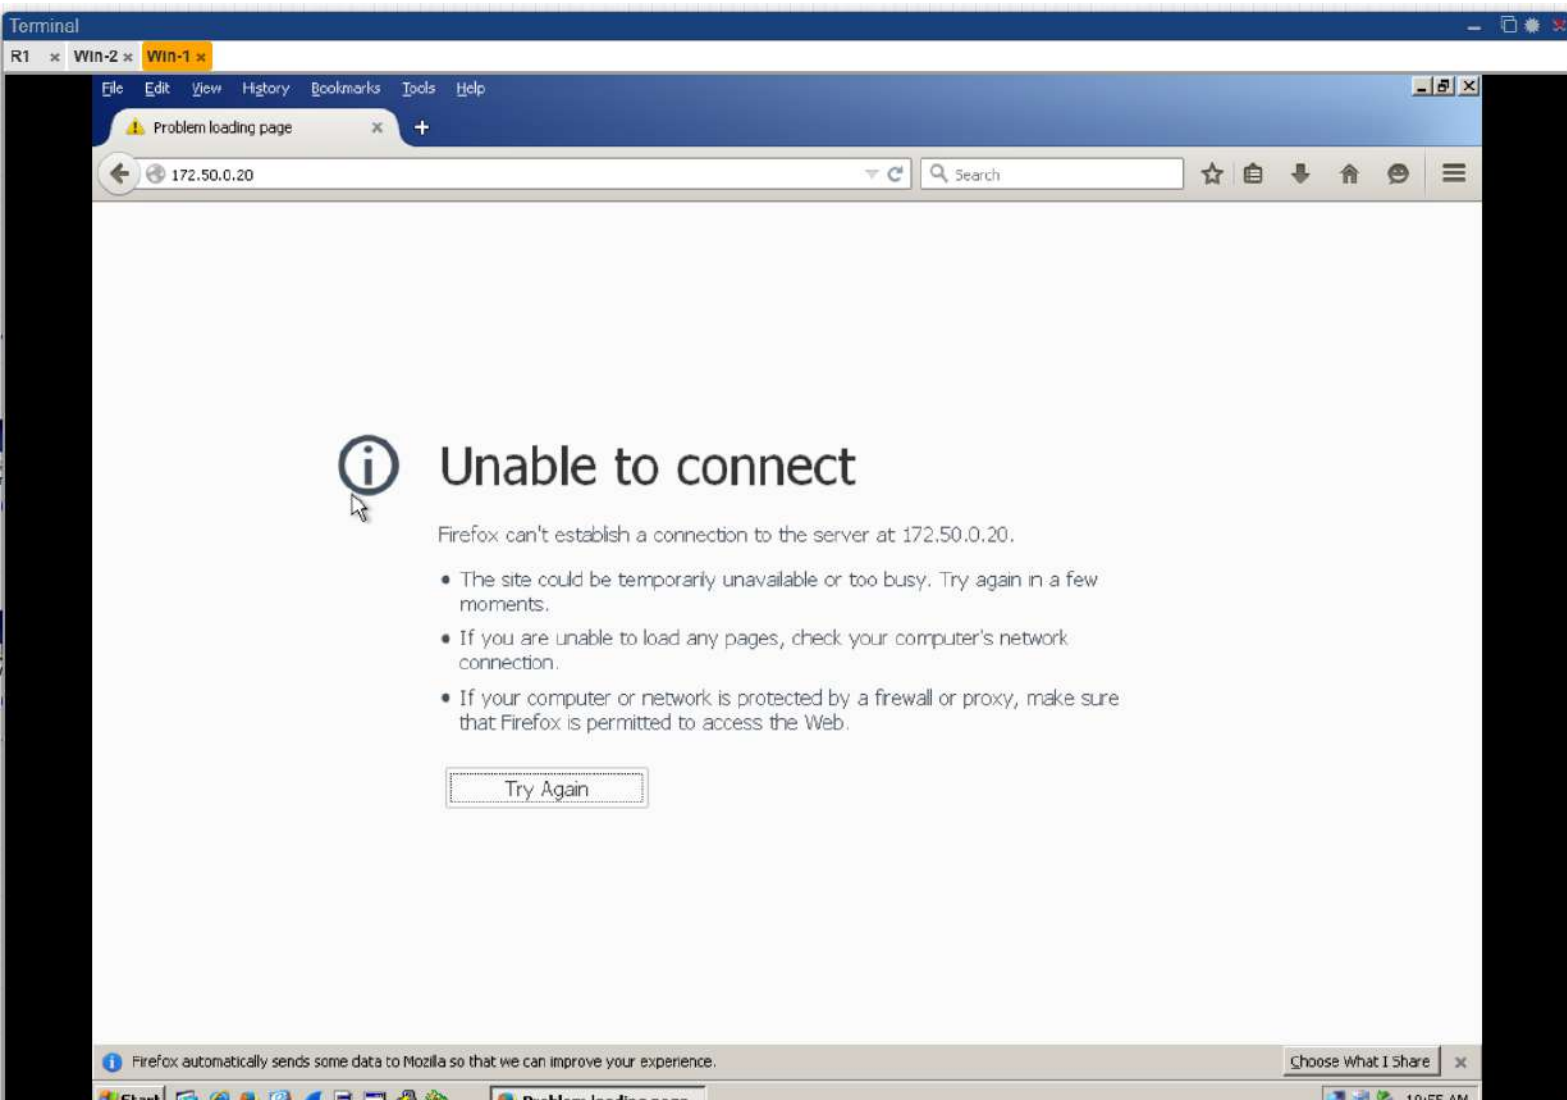

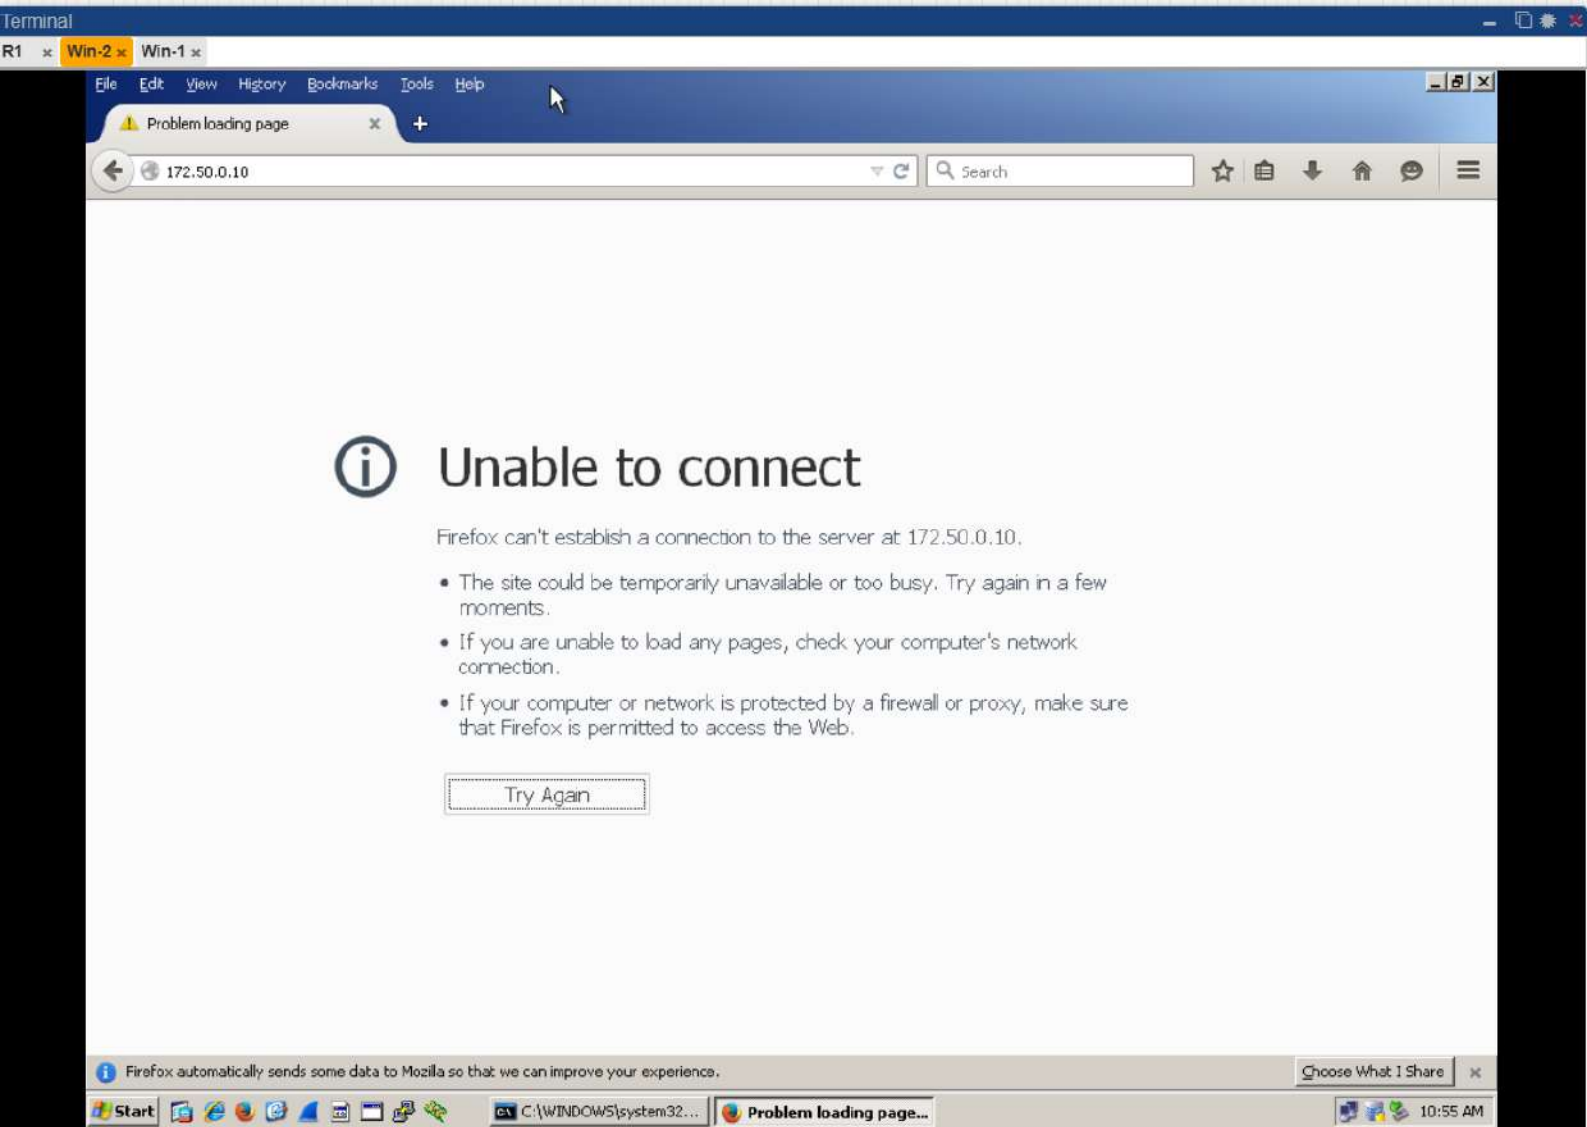

Terminal

Win-1 x Win-2 x R1 x R3 x R2 x R4 x

Gateway of last resort is 20.0.0.2 to network 0.0.0.0

```
S* 0.0.0.0/0 [1/0] via 20.0.0.2
    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    10.0.0.0/8 is directly connected, Ethernet0/0
L    10.0.0.1/32 is directly connected, Ethernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/1
L    20.0.0.1/32 is directly connected, Ethernet0/1
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#ip route 172.50.0.0 255.255.0.0 20.0.0.2
R1(config)#200.12.56.0 255.255.255.0
*Sep 18 11:12:58.119: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config)#200.12.56.0 255.255.255.0 20.0.0.2
^
% Invalid input detected at '^' marker.

R1(config)#ip route 200.12.56.0 255.255.255.0 20.0.0.2
R1(config)#s 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.0 0.0.0.0 eq 80
R1(config)#no access-list 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.0 0.0.0.0 s
R1(config)#s 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.10 0.0.0.0 eq 80
R1(config)#s 100 permit tcp 10.0.0.20 0.0.0.0 172.50.0.20 0.0.0.0 eq 80
R1(config)#int e0/0
R1(config-if)#ip access-group 100 in
R1(config-if)#exit
R1(config)#sh access-list
^
% Invalid input detected at '^' marker.

R1(config)#exit
R1#sh
*Sep 18 11:17:31.998: %SYS-5-CONFIG_I: Configured from console by console
R1#sh access-list
Extended IP access list 100
 10 permit tcp host 10.0.0.10 host 172.50.0.10 eq www
 20 permit tcp host 10.0.0.20 host 172.50.0.20 eq www
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#s 100 permit 10.0.0.0 0.255.255.255 200.12.56.10 0.0.0.0 eq 53
access-list 100 permit 10.0.0.0 0.255.255.255 200.12.56.10 0.0.0.0 eq 53
^
% Invalid input detected at '^' marker.

R1(config)#s 100 permit 10.0.0.0 0.255.255.255 200.12.56.0 0.0.0.0 eq 53
access-list 100 permit 10.0.0.0 0.255.255.255 200.12.56.0 0.0.0.0 eq 53
^
% Invalid input detected at '^' marker.

R1(config)#s 100 permit udp 10.0.0.0 0.255.255.255 200.12.56.10 0.0.0.0 eq 53
R1(config)#s 100 permit icmp 10.0.0.0 0.255.255.255 172.50.0.0 0.0.255.255
R1(config)#s 100 permit ip 10.0.0.0 0.255.255.255 172.50.0.0 0.0.255.255
R1(config)#
```