

```

Terminal
DC-EDGE> Win1> Win2> VPC1> VPC2> HO-EDGE>

HO-EDGE# ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level 1, L2 - IS-IS level 2
       Ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, I - IGRP
       * - replicated route, h - next hop override, p - overrides from PTR

Gateway of last resort is 20.0.0.2 to network 0.0.0.0

R* 0.0.0.0/0 [1/0] via 20.0.0.2
R 10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.0.0.0/8 is directly connected, Ethernet0/0
C 10.0.0.1/32 is directly connected, Ethernet0/8
R 20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/1
C 20.0.0.1/32 is directly connected, Ethernet0/1
HO-EDGE# running-config | include ip nat
ip nat inside
ip nat outside
ip nat inside source list 10 interface Ethernet0/1 overload
HO-EDGE#
  
```

## Terminal

DC-EDGE \* Win1 \* Win2 \* VPC1 \* VPC2 \* HO-EDGE \*

% Incomplete command.

DC-EDGE#show running-config | include ip nat

ip nat inside

ip nat outside

ip nat inside source static 192.168.1.10 30.0.0.10

ip nat inside source static 192.168.1.20 30.0.0.11

DC-EDGE#sh ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2

E1 - OSPF external type 1, E2 - OSPF external type 2

i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2

ia - IS-IS inter area, \* - candidate default, U - per-user static route

o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP

a - application route

+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is 30.0.0.1 to network 0.0.0.0

S\* 0.0.0.0/0 [1/0] via 30.0.0.1

30.0.0.0/8 is variably subnetted, 4 subnets, 2 masks

C 30.0.0.0/8 is directly connected, Ethernet0/1

L 30.0.0.2/32 is directly connected, Ethernet0/1

L 30.0.0.10/32 is directly connected, Ethernet0/1

L 30.0.0.11/32 is directly connected, Ethernet0/1

192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks


C 192.168.1.0/24 is directly connected, Ethernet0/0

L 192.168.1.1/32 is directly connected, Ethernet0/0

DC-EDGE#

Terminal

DC-EDGE \* Win1 \* Win2 \* VPC1 \* VPC2 \* HO-EDGE \*

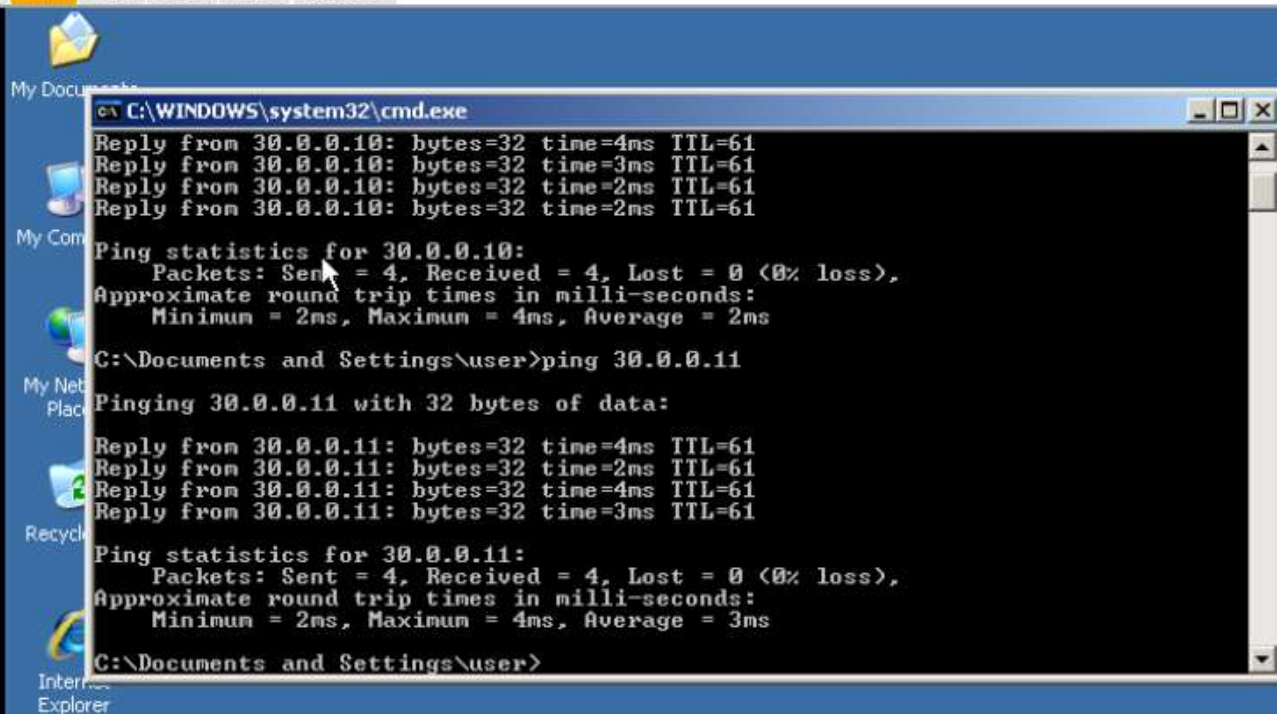

```
C:\WINDOWS\system32\cmd.exe
Reply from 30.0.0.10: bytes=32 time=4ms TTL=61
Reply from 30.0.0.10: bytes=32 time=3ms TTL=61
Reply from 30.0.0.10: bytes=32 time=2ms TTL=61
Reply from 30.0.0.10: bytes=32 time=2ms TTL=61
Ping statistics for 30.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 4ms, Average = 2ms
C:\Documents and Settings\user>ping 30.0.0.11
Pinging 30.0.0.11 with 32 bytes of data:
Reply from 30.0.0.11: bytes=32 time=4ms TTL=61
Reply from 30.0.0.11: bytes=32 time=2ms TTL=61
Reply from 30.0.0.11: bytes=32 time=4ms TTL=61
Reply from 30.0.0.11: bytes=32 time=3ms TTL=61
Ping statistics for 30.0.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 4ms, Average = 3ms
C:\Documents and Settings\user>
```

Terminal

DC-EDGE x Win1 x Win2 x VPC1 x VPC2 x HO-EDGE x

My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-1

Old Java Applet

C:\WINDOWS\system32\cmd.exe

C:\Documents and Settings\user>ping 30.0.0.10

Pinging 30.0.0.10 with 32 bytes of data:

Reply from 30.0.0.10: bytes=32 time=3ms TTL=61

Reply from 30.0.0.10: bytes=32 time=2ms TTL=61

Reply from 30.0.0.10: bytes=32 time=2ms TTL=61

Reply from 30.0.0.10: bytes=32 time=2ms TTL=61

Ping statistics for 30.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>ping 30.0.0.11

Pinging 30.0.0.11 with 32 bytes of data:

Reply from 30.0.0.11: bytes=32 time=3ms TTL=61

Reply from 30.0.0.11: bytes=32 time=3ms TTL=61

Reply from 30.0.0.11: bytes=32 time=3ms TTL=61

Reply from 30.0.0.11: bytes=32 time=4ms TTL=61

Ping statistics for 30.0.0.11:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 3ms, Maximum = 4ms, Average = 3ms

C:\Documents and Settings\user>