Exp:10b   Router.

Date:

Aim:

To design & configure a network interpreter
using wireless router DHCP network.

Procedure:

(1) Arrange the PC & laptops in the page.

(2) Assign IP address respectively.

(3) Now ping from PC's to server.

Diagram:
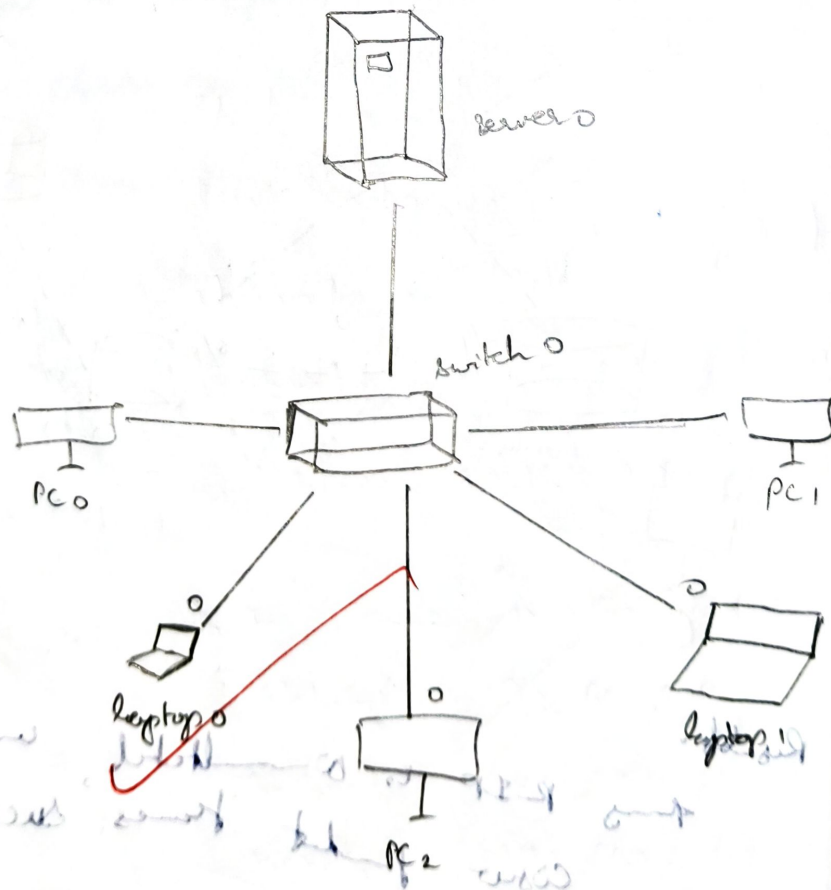
Output:

Ping laptop0 to PC2

Event List		
Vis	Tim (sec)	Last Device
	0.000	
	0.004	laptop 0
	0.003	switch 0
	0.004	PC2
visible	1.996	switch 0

Result:

Thus the configuration of DHCP has been successfully executed.