



## COMPACT flow measuring device

- For continuous multiparameter monitoring
- Measuring and monitoring of flow, temperature and conductivity
- Quick and flexible start-up via IO-Link and wireless short-distance communication via radio waves
- Easy adjustment to suit the process by using adapters

Product variants described in the data sheet may differ from the product presentation and description.

### Can be combined with

|                                                                                     |                                                                                                                                        |   |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---|
|   | <b>Type 8619</b><br>multiCELL – multi-channel/<br>multi-function transmitter/<br>controller                                            | ▶ |
|  | <b>Type 8611</b><br>eCONTROL – Universal<br>controller                                                                                 | ▶ |
|  | <b>Type 8025</b><br>Insertion flowmeter or batch<br>controller with paddle wheel<br>and flow transmitter or<br>remote batch controller | ▶ |

### Type description

The Type 8050 is a compact magnetic-inductive flow measuring device that will help you monitor your processes. Thanks to its compact and robust design, this device is the perfect solution for applications where space needs to be saved. Additional connection adapters simplify integration into the process and the wireless connection makes start-up easier.

## Table of contents

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>1. General technical data</b>                          | <b>3</b>  |
| <b>2. Approvals and conformities</b>                      | <b>6</b>  |
| 2.1. General notes .....                                  | 6         |
| 2.2. Conformity .....                                     | 6         |
| 2.3. Standards .....                                      | 6         |
| 2.4. Pressure Equipment Directive (PED) .....             | 6         |
| Device used in a pipe .....                               | 6         |
| 2.5. North America (USA/Canada) .....                     | 6         |
| 2.6. Drinking water .....                                 | 6         |
| <b>3. Materials</b>                                       | <b>7</b>  |
| 3.1. Bürkert resistApp .....                              | 7         |
| <b>4. Dimensions</b>                                      | <b>7</b>  |
| 4.1. Flowmeter with external thread pipe connection ..... | 7         |
| 4.2. Flowmeter with internal thread pipe connection ..... | 8         |
| <b>5. Product installation</b>                            | <b>8</b>  |
| 5.1. Installation notes .....                             | 8         |
| Flow measurement .....                                    | 8         |
| <b>6. Product operation</b>                               | <b>9</b>  |
| 6.1. Measurement principle .....                          | 9         |
| <b>7. Product accessories</b>                             | <b>9</b>  |
| <b>8. Ordering information</b>                            | <b>10</b> |
| 8.1. Bürkert eShop .....                                  | 10        |
| 8.2. Bürkert product filter .....                         | 10        |
| 8.3. Ordering chart .....                                 | 10        |
| 8.4. Ordering chart accessories .....                     | 11        |

## 1. General technical data

### Product properties

#### Material

Make sure the device materials are compatible with the fluid you are using.  
Further information can be found in chapter ["3.1. Bürkert resistApp" on page 7.](#)

#### Non-wetted parts

|         |                                          |
|---------|------------------------------------------|
| Housing | Stainless steel 1.4404/316L, 1.4409/CF3M |
| Display | PC                                       |

#### Wetted parts

|                       |                                                                                                                                                                      |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pipe connection       | Stainless steel 1.4404/316L                                                                                                                                          |
| Measurement tube      | PEEK                                                                                                                                                                 |
| Electrode             | Stainless steel 1.4435/316L                                                                                                                                          |
| Temperature sensor    | Stainless steel 1.4435/316L                                                                                                                                          |
| Seal                  | FKM or EPDM                                                                                                                                                          |
| Display               | 1.4" TFT (thin-film-transistor) colour display with back-lighting, auto-rotatable (dependent on orientation)                                                         |
| Pipe diameter         | <ul style="list-style-type: none"> <li>• DN 15...DN 50</li> <li>• ½"...2"</li> </ul>                                                                                 |
| Dimensions            | Further information can be found in chapter <a href="#">"4. Dimensions" on page 7.</a>                                                                               |
| Weight                | <ul style="list-style-type: none"> <li>• DN 15 (½"): 0.34 kg</li> <li>• DN 20 (¾"): 0.35 kg</li> <li>• DN 25 (1"): 0.36 kg</li> <li>• DN 50 (2"): 1.55 kg</li> </ul> |
| Measuring element     | Electrodes                                                                                                                                                           |
| Measurement principle | Electromagnetic<br>Further information can be found in chapter <a href="#">"6.1. Measurement principle" on page 9.</a>                                               |
| Measured quantity     | <ul style="list-style-type: none"> <li>• Volume flow rate</li> <li>• Temperature</li> <li>• Conductivity<sup>1)</sup></li> </ul>                                     |

#### Measuring range

|                              |                                                                                                                                                                                                                                                                                               |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Volume flow rate measurement | <ul style="list-style-type: none"> <li>• DN 15 (½"): 0.05...35 l/min (0.013...9.2 gal/min)</li> <li>• DN 20 (¾"): 0.1...75 l/min (0.026...19.8 gal/min)</li> <li>• DN 25 (1"): 0.2...150 l/min (0.052...39.6 gal/min)</li> <li>• DN 50 (2"): 1.5...750 l/min (0.4...198.1 gal/min)</li> </ul> |
| Conductivity measurement     | <ul style="list-style-type: none"> <li>• DN 15 (½"): 20...30 000 µS/cm</li> <li>• DN 20 (¾"): 20...30 000 µS/cm</li> <li>• DN 25 (1"): 20...30 000 µS/cm</li> <li>• DN 50 (2"): 20...10 000 µS/cm</li> </ul>                                                                                  |
| Temperature measurement      | -10...+70 °C (+14...+158 °F)                                                                                                                                                                                                                                                                  |
| Operating mode               | <ul style="list-style-type: none"> <li>• Via wireless technology via radio waves (Wireless Field Device Configurator application)</li> <li>• Via IO-Link</li> </ul>                                                                                                                           |

#### Product accessory

|                  |                                              |
|------------------|----------------------------------------------|
| Adapter and seal | Stainless steel 1.4404/316L and aramid fibre |
|------------------|----------------------------------------------|

### Performance data

|               |                                                                                                                                                                         |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Response time | Minimum time<br><ul style="list-style-type: none"> <li>• 660 ms for analogue output, when damping = 0</li> <li>• 460 ms for digital output, when damping = 0</li> </ul> |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### Volume flow rate measurement

Under reference conditions i.e. measurement fluid = water, temperature = +15...+45 °C (+59...+113 °F) and pressure = 2...6 bar (29.00...87.02 PSI)

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| Measurement deviation | ≤ (± 0.8 % of the measured value) + (± 0.1 % of full scale) |
| Repeatability         | ± 0.2 % of the measured value                               |

#### Temperature measurement

|                       |                     |
|-----------------------|---------------------|
| Measurement deviation | ± 2.5 °C (± 4.5 °F) |
| Repeatability         | ± 0.5 °C (± 0.9 °F) |

|                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Response time (t <sub>90</sub> )                | Typically 30 s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Conductivity measurement</b>                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Repeatability                                   | (± 5 % of the measured value) + (± 5 µS/cm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Current output uncertainty<sup>2,1</sup></b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Additional error                                | ± 20 µA, at 25 °C ambient temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Repeatability                                   | ± 10 µA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Voltage output uncertainty<sup>2,1</sup></b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Additional error                                | ± 60 mV, at 25 °C ambient temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Repeatability                                   | ± 10 mV                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Electrical data</b>                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Operating voltage                               | 18...30 V DC, filtered and regulated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Power source (not supplied)                     | Limited power source according to UL/EN 62368-1 standards or limited energy circuit according to UL/EN 61010-1 paragraph 9.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| DC reverse polarity protection                  | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Overvoltage protection                          | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Short circuit protection                        | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Current consumption                             | <ul style="list-style-type: none"> <li>Without outputs IO1 and IO2: 120 mA</li> <li>With outputs IO1 and IO2: 120 mA plus the effective load currents</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Power consumption                               | Max. 3 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Input/output</b>                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Digital input                                   | <b>2 freely selectable inputs/outputs (IO1 and IO2)</b><br>Status inputs (e.g. for a totalizer reset) <ul style="list-style-type: none"> <li>Minimum pulse duration: 100 ms</li> <li>High or low active</li> <li>Switch-on level: 15 V</li> <li>Switch-off level: 5 V</li> <li>Internal resistance: 7.5 kΩ</li> </ul>                                                                                                                                                                                                                                                                                                                                      |
| Digital output                                  | <ul style="list-style-type: none"> <li>Switch:               <ul style="list-style-type: none"> <li>PNP (high-side-switch) or NPN (low-side-switch)</li> <li>switching behaviour of IO1 and IO2: configurable independently of one another</li> <li>max. load current: 250 mA.</li> </ul> </li> <li>Pulse:               <ul style="list-style-type: none"> <li>PNP (high-side-switch)</li> <li>only available for output 1 (IO1)</li> <li>max. load current: 250 mA.</li> <li>max. pulse rate: 10 000 Pulse/s</li> </ul> </li> <li>IO-Link:               <ul style="list-style-type: none"> <li>only available for output 1 (IO1)</li> </ul> </li> </ul> |
| Analogue output                                 | <ul style="list-style-type: none"> <li>Current outputs (4...20 mA)               <ul style="list-style-type: none"> <li>The maximum load may not exceed 500 Ω. A bigger load distorts the output signal.</li> </ul> </li> <li>Voltage output (2...10 V)               <ul style="list-style-type: none"> <li>The minimum load may exceed 600 Ω. A smaller load distorts the output signal.</li> </ul> </li> </ul>                                                                                                                                                                                                                                          |
| Fault signal                                    | <ul style="list-style-type: none"> <li>Status signal (as per NAMUR Recommendation NE 107)</li> <li>Plain text display with remedial action</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Connection cable                                | At least 0.12 mm <sup>2</sup> (AWG26) cross-section                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Medium data</b>                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Fluid temperature                               | <ul style="list-style-type: none"> <li>- 10...+ 70 °C (+ 14...+ 158 °F)</li> <li>Permissible short-term temperature: + 85 °C (+ 185 °F) maximum one hour every four hours</li> <li>Permissible short-term temperature with electronics switched off: + 100 °C (+ 212 °F) maximum one hour every four hours</li> </ul>                                                                                                                                                                                                                                                                                                                                      |
| Fluid pressure                                  | Max. 16 bar (232 PSI), relative                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Minimum conductivity                            | 10 µS/cm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Product connections</b>                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Pipe connection                                 | <ul style="list-style-type: none"> <li>External thread G 1/2, G 3/4, G 1 or G 2</li> <li>Internal thread NPT 1/2, NPT 3/4, NPT 1 or NPT 2</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Electrical connection                           | M12 × 1 A-coded, male                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

### Digital communication: IO-Link

|                                |                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Communication interface        | <ul style="list-style-type: none"> <li>• IO-Link device V1.1</li> <li>• IO-Link Smart Sensor Profile 2nd Edition</li> </ul>                                                                                                                                                                                                                                    |
| SIO mode                       | Yes                                                                                                                                                                                                                                                                                                                                                            |
| Transmission speed (baud rate) | COM 2 (38.4 kBd)                                                                                                                                                                                                                                                                                                                                               |
| Cycle time                     | Min. 10 ms                                                                                                                                                                                                                                                                                                                                                     |
| Process data width             | 120 bit                                                                                                                                                                                                                                                                                                                                                        |
| IO-Link data storage           | Yes                                                                                                                                                                                                                                                                                                                                                            |
| Block configuration            | No                                                                                                                                                                                                                                                                                                                                                             |
| Device operational             | Operational four seconds after the supply voltage is applied                                                                                                                                                                                                                                                                                                   |
| IO device description (IODD)   | <p>The device description is available in the operating instructions which can be found on our website under the "User Manuals" heading for <b>Type 8050</b> ▶.</p> <p>Alternatively, see "Device Description Files" under the "Software" heading for <b>Type 8050</b> ▶ or at <a href="https://ioddfinder.io-link.com">https://ioddfinder.io-link.com</a></p> |

### Approvals and conformities

#### Directives

|                              |                                                                                                                                                                                                                                                                                                         |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CE directive                 | Further information on the CE Directive can be found in chapter "2.3. Standards" on page 6.                                                                                                                                                                                                             |
| Pressure equipment directive | <p>Complying with article 4, paragraph 1 of 2014/68/EU directive</p> <p>Further information on the pressure equipment directive can be found in chapter "2.4. Pressure Equipment Directive (PED)" on page 6.</p>                                                                                        |
| North America (USA/Canada)   | UL Listed for the USA and Canada                                                                                                                                                                                                                                                                        |
| Drinking water               | On request: Drinking water conformity certificate                                                                                                                                                                                                                                                       |
| Others                       | <ul style="list-style-type: none"> <li>• UKCA marking</li> <li>• On request: radio certification (for instance for Europe: Telecommunications Directive RED 2014/53/EU and with other certifications in countries such as Argentina, Australia and New Zealand, Canada, United States, etc.)</li> </ul> |

### Environment and installation

|                                                |                                                                                                                                                            |
|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature                            | <ul style="list-style-type: none"> <li>• Operation: - 10...+ 60 °C (+ 14...+ 140 °F)</li> <li>• Storage: - 25...+ 85 °C (- 13...+ 185 °F)</li> </ul>       |
| Relative air humidity                          | ≤ 100 % (wet and damp locations)                                                                                                                           |
| Height above sea level                         | Max. 2000 m                                                                                                                                                |
| Operating condition                            | Continuous                                                                                                                                                 |
| Equipment mobility                             | Fixed                                                                                                                                                      |
| Application range                              | <p>Indoor and outdoor</p> <p>Protect the device against electromagnetic interference, ultraviolet rays and against the effects of climatic conditions.</p> |
| Degree of protection according to IEC/EN 60529 | IP65/IP67                                                                                                                                                  |
| Installation category                          | Category II according to UL/EN 61010-1                                                                                                                     |
| Pollution degree                               | Degree 3 according to UL/EN 61010-1                                                                                                                        |

- 1.) Conductivity measurement is possible with this device, but even if the measurement is reliable it is only indicative. The device must not be used as a conductivity meter.
- 2.) The deviation of the measurement at the outputs can increase depending on the device configuration.

## 2. Approvals and conformities

### 2.1. General notes

- The approvals and conformities listed below must be stated when making enquiries. This is the only way to ensure that the product complies with all required specifications.
- Not all available variants can be supplied with the below mentioned approvals or conformities.

### 2.2. Conformity

In accordance with the Declaration of Conformity, the product is compliant with the EU Directives.

### 2.3. Standards

The applied standards which are used to demonstrate compliance with the EU Directives are listed in the EU-Type Examination Certificate and/or the EU Declaration of Conformity.

### 2.4. Pressure Equipment Directive (PED)

The device conforms to Article 4, Paragraph 1 of the Pressure Equipment Directive 2014/68/EU under the following conditions:

#### Device used in a pipe

##### Note:

- The data in the table is independent of the chemical compatibility of the material and the fluid.
- PS = maximum admissible pressure, DN = nominal diameter of the pipe

| Type of fluid                              | Conditions                          |
|--------------------------------------------|-------------------------------------|
| Fluid group 1, Article 4, Paragraph 1.c.i  | DN ≤ 25                             |
| Fluid group 2, Article 4, Paragraph 1.c.i  | DN ≤ 32 or PS*DN ≤ 1000             |
| Fluid group 1, Article 4, Paragraph 1.c.ii | DN ≤ 25 or PS*DN ≤ 2000             |
| Fluid group 2, Article 4, Paragraph 1.c.ii | DN ≤ 200 or PS ≤ 10 or PS*DN ≤ 5000 |

### 2.5. North America (USA/Canada)


| Approval                                                                            | Description                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Optional: UL Listed for the USA and Canada</b><br>The products are UL Listed for the USA and Canada according to: <ul style="list-style-type: none"> <li>• UL 61010-1 (ELECTRICAL EQUIPMENT FOR MEASUREMENT, CONTROL, AND LABORATORY USE – Part 1: General Requirements)</li> <li>• CAN/CSA-C22.2 No. 61010-1</li> </ul> |

### 2.6. Drinking water

| Conformity                                                                          | Description                                                                                   |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
|  | <b>Optional:</b><br>The current certifications for drinking water are available upon request. |

3. Materials

3.1. Bürkert resistApp

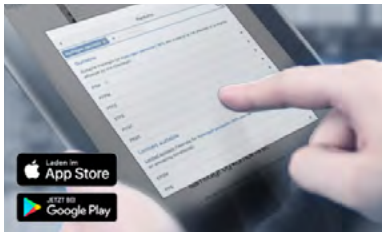

**Bürkert resistApp – Chemical resistance chart**


You want to ensure the reliability and durability of the materials in your individual application case? Verify your combination of media and materials on our website or in our resistApp.

[Start chemical resistance check](#)

4. Dimensions

4.1. Flowmeter with external thread pipe connection


**Note:**  
Dimensions in mm, unless otherwise stated

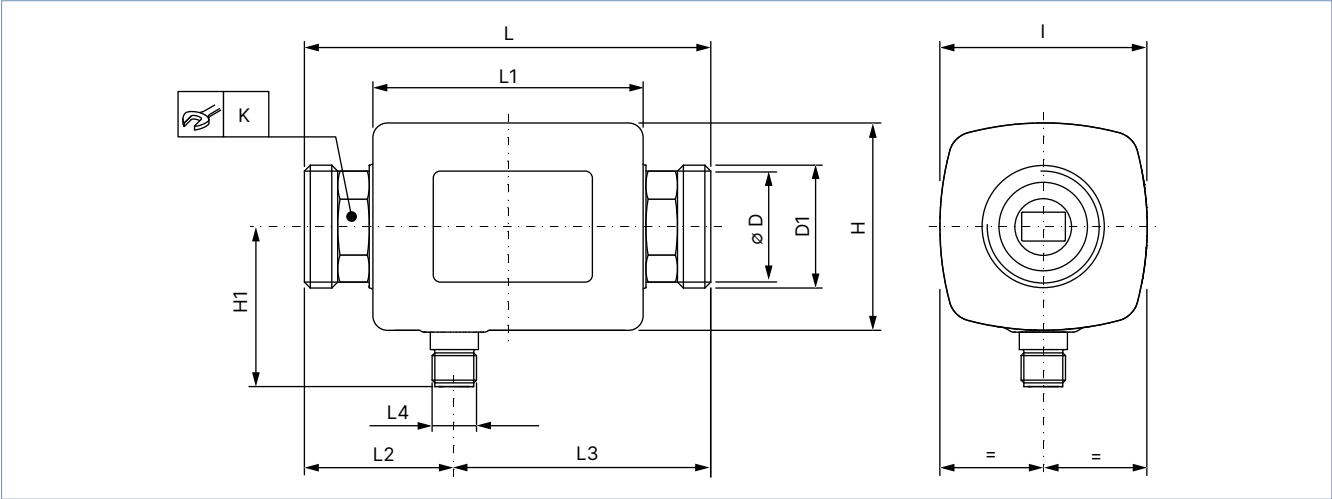

| DN | H  | H1 | L   | L1  | L2   | L3      | Ø D | D1 [inch] | I  | K     |
|----|----|----|-----|-----|------|---------|-----|-----------|----|-------|
| 15 | 56 | 43 | 110 | 73  | 40.5 | M12 × 1 | 12  | G ½       | 56 | AF 24 |
| 20 | 56 | 43 | 110 | 73  | 40.5 | M12 × 1 | 15  | G ¾       | 56 | AF 27 |
| 25 | 56 | 43 | 110 | 73  | 40.5 | M12 × 1 | 15  | G 1       | 56 | AF 27 |
| 50 | 86 | 58 | 200 | 113 | 80   | M12 × 1 | 43  | G 2       | 86 | AF 52 |

4.2. Flowmeter with internal thread pipe connection

**Note:**  
Dimensions in mm, unless otherwise stated

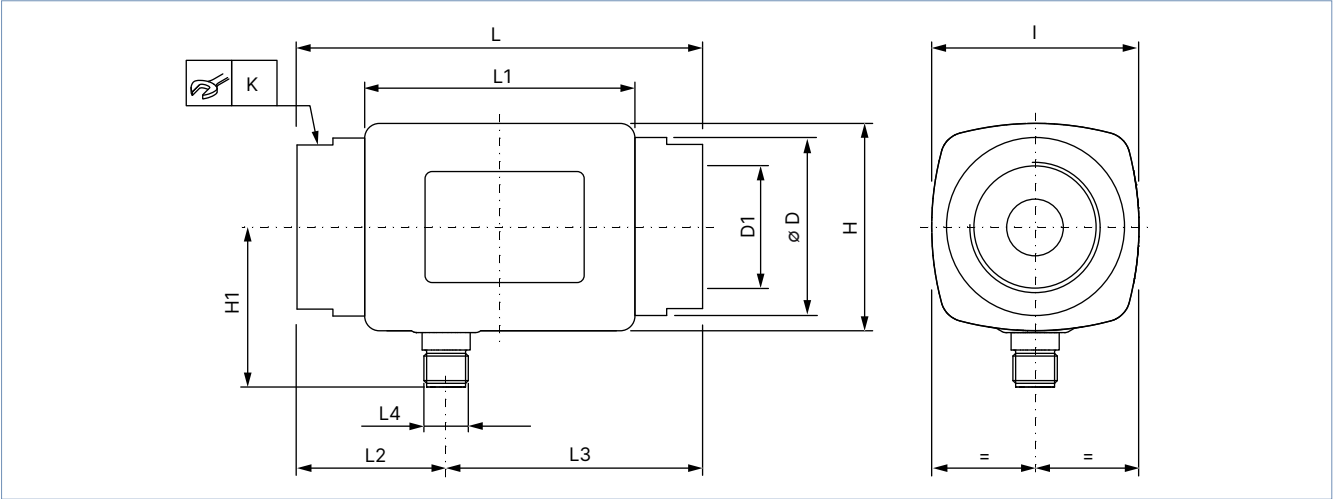

| DN | H  | H1 | L   | L1  | L2   | L3   | L4      | Ø D  | D1 [inch] | I  | K     |
|----|----|----|-----|-----|------|------|---------|------|-----------|----|-------|
| 15 | 56 | 43 | 110 | 73  | 40.5 | 69.5 | M12 × 1 | 29.5 | NPT ½     | 56 | AF 27 |
| 20 | 56 | 43 | 110 | 73  | 40.5 | 69.5 | M12 × 1 | 36   | NPT ¾     | 56 | AF 32 |
| 25 | 56 | 43 | 110 | 73  | 40.5 | 69.5 | M12 × 1 | 42   | NPT 1     | 56 | AF 41 |
| 50 | 86 | 58 | 180 | 113 | 80   | 120  | M12 × 1 | 73.5 | NPT 2     | 86 | AF 70 |

5. Product installation


5.1. Installation notes

Flow measurement

**Note:**  
The device is not suitable for use in gaseous media and steam.

- During flowmeter operation the pipe must be completely full.
- No upstream and downstream distances need to be considered.

The sensor can be installed into either horizontal or vertical pipes. All correct installation positions described in the following allow accurate flow measurement. However, we recommend that you install the sensor in an **ascending** pipe for optimal flow measurement.

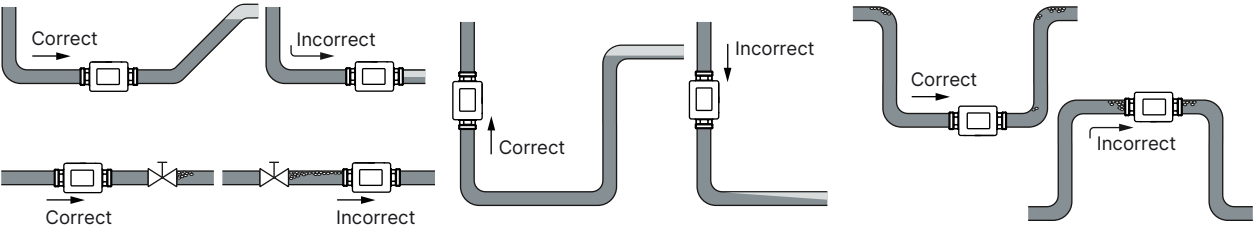

6. Product operation

6.1. Measurement principle



Faraday's law serves as the physical basis for magnetic flow measurement. Magnetic coils are arranged around the pipeline to generate a magnetic field. Conductive liquids, flowing through this field, induce an electrical voltage between two metal electrodes, positioned opposite each other and in contact with the liquid. These electrodes allow the direct measurement of the induced electrical alternating voltage.

7. Product accessories

Note:

- The installation of the flowmeter in a pipeline requires the use of adapters and seals, depending on the device variant.
- The drawings show the assembly with both variants of the device.

See **"8.4. Ordering chart accessories"** on page 11 for more information.
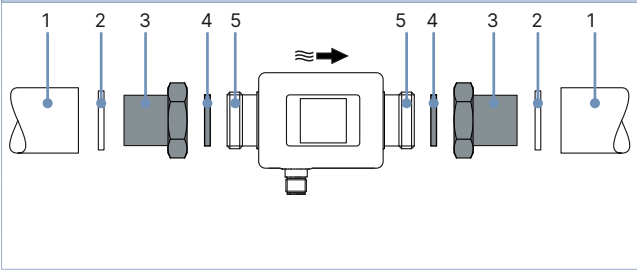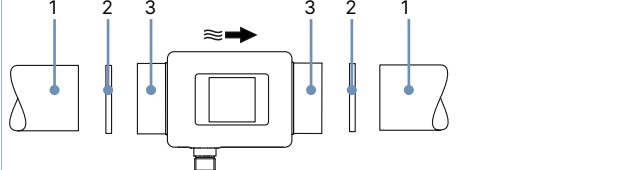
| Accessories                                                                         | No. | Description                                                                                                 |
|-------------------------------------------------------------------------------------|-----|-------------------------------------------------------------------------------------------------------------|
|   | 1   | Pipe with internal thread connection                                                                        |
|                                                                                     | 2   | Seal (not supplied; use suitable commercially available seal material.)                                     |
|                                                                                     | 3   | Adapter<br>Further information can be found in chapter <b>"8.4. Ordering chart accessories"</b> on page 11. |
|                                                                                     | 4   | Seal (included in delivery, see also chapter <b>"8.4. Ordering chart accessories"</b> on page 11.)          |
|                                                                                     | 5   | External thread connection of the flowmeter                                                                 |
|  | 1   | Pipe with conical external thread connection                                                                |
|                                                                                     | 2   | Seal (not supplied; use suitable commercially available seal material.)                                     |
|                                                                                     | 3   | Internal thread connection of the flowmeter                                                                 |

DTS 1000540238 EN Version: H Status: RL (released | freigegeben | valide) printed: 16.12.2025

## 8. Ordering information

### 8.1. Bürkert eShop



#### Bürkert eShop – Easy ordering and quick delivery

You want to find your desired Bürkert product or spare part quickly and order directly? Our online shop is available for you 24/7. Sign up and enjoy all the benefits.

[Order online now](#)

### 8.2. Bürkert product filter



#### Bürkert product filter – Get quickly to the right product

You want to select products comfortably based on your technical requirements? Use the Bürkert product filter and find suitable articles for your application quickly and easily.

[Try out our product filter](#)

### 8.3. Ordering chart

#### Note:

The following variants have at least

- a pipe connection in stainless steel
- a measurement tube in PEEK
- electrodes and a temperature sensor in stainless steel

| DN                                                      | Measuring range                           |                                     |                   | Pipe connection | Seal material                                                                                | Article no.                                                                                  |
|---------------------------------------------------------|-------------------------------------------|-------------------------------------|-------------------|-----------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| [mm]                                                    | Volume flow rate                          | Temperature                         | Conductivity      |                 |                                                                                              |                                                                                              |
| Flowmeter with external (male) thread pipe connection   |                                           |                                     |                   |                 |                                                                                              |                                                                                              |
| 15                                                      | 0.05...35 l/min<br>(0.013...9.2 gal/min)  | - 10...+ 70 °C<br>(+ 14...+ 158 °F) | 20...30 000 µS/cm | G ½             | FKM                                                                                          | 571164  |
|                                                         |                                           |                                     |                   |                 | EPDM                                                                                         | 571165  |
| 20                                                      | 0.1...75 l/min<br>(0.026...19.8 gal/min)  |                                     | 20...30 000 µS/cm | G ¾             | FKM                                                                                          | 571172  |
|                                                         |                                           |                                     |                   |                 | EPDM                                                                                         | 571173  |
| 25                                                      | 0.2...150 l/min<br>(0.052...39.6 gal/min) |                                     | 20...30 000 µS/cm | G 1             | FKM                                                                                          | 571180  |
|                                                         |                                           |                                     |                   | EPDM            | 571181  |                                                                                              |
| 50                                                      | 1.5...750 l/min<br>(0.4...198.1 gal/min)  |                                     | 20...10 000 µS/cm | G 2             | FKM                                                                                          | 571188  |
|                                                         |                                           |                                     |                   |                 | EPDM                                                                                         | 571189  |
| Flowmeter with internal (female) thread pipe connection |                                           |                                     |                   |                 |                                                                                              |                                                                                              |
| 15                                                      | 0.05...35 l/min<br>(0.013...9.2 gal/min)  | - 10...+ 70 °C<br>(+ 14...+ 158 °F) | 20...30 000 µS/cm | NPT ½           | FKM                                                                                          | 571166  |
|                                                         |                                           |                                     |                   |                 | EPDM                                                                                         | 571167  |
| 20                                                      | 0.1...75 l/min<br>(0.026...19.8 gal/min)  |                                     | 20...30 000 µS/cm | NPT ¾           | FKM                                                                                          | 571174  |
|                                                         |                                           |                                     |                   |                 | EPDM                                                                                         | 571175  |
| 25                                                      | 0.2...150 l/min<br>(0.052...39.6 gal/min) |                                     | 20...30 000 µS/cm | NPT 1           | FKM                                                                                          | 571182  |
|                                                         |                                           |                                     |                   | EPDM            | 571183  |                                                                                              |
| 50                                                      | 1.5...750 l/min<br>(0.4...198.1 gal/min)  |                                     | 20...10 000 µS/cm | NPT 2           | FKM                                                                                          | 571190  |
|                                                         |                                           |                                     |                   |                 | EPDM                                                                                         | 571191  |

#### 8.4. Ordering chart accessories

| Description                                                                                          |       | Article no.                                                                                  |
|------------------------------------------------------------------------------------------------------|-------|----------------------------------------------------------------------------------------------|
| <b>Set of 2 adapters<sup>1)</sup> suitable for flowmeter with external threaded pipe connection</b>  |       |                                                                                              |
| G ½ to G ¾ external thread                                                                           |       | 571196    |
| G ½ to R ¾ external thread                                                                           |       | 571197    |
| G ½ to G ½ internal thread                                                                           |       | 571198    |
| G ½ to R ½ external thread                                                                           |       | 571199    |
| G ½ to ½" clamp, Ø 25 mm, BS4825 (similar DIN 32676 series C and ASME BPE)                           |       | 571200    |
| G ¾ to R ¾ external thread                                                                           |       | 571201    |
| G ¾ to G ¾ internal thread                                                                           |       | 571202    |
| G ¾ to ¾" clamp, Ø 25 mm, BS4825 (similar DIN 32676 series C and ASME BPE)                           |       | 571203    |
| G 1 to R 1 external thread                                                                           |       | 571204    |
| G 1 to G 1 internal thread                                                                           |       | 571205    |
| G 1 to 1" clamp, Ø 50 mm, BS4825 (similar DIN 32676 series C and ASME BPE)                           |       | 571206    |
| G 2 to R 1½ external thread                                                                          |       | 571207    |
| G 2 to R 2 external thread                                                                           |       | 571208    |
| G 2 to G 1½ external thread                                                                          |       | 571209    |
| G 2 to G 2 internal thread                                                                           |       | 571210    |
| G 2 to 2" clamp, Ø 64 mm, BS4825 (similar DIN 32676 series C and ASME BPE)                           |       | 571211    |
| <b>Set of 2 seals suitable for flowmeter with external threaded pipe connection</b>                  |       |                                                                                              |
| Aramid fibre seal                                                                                    | DN 15 | 571218    |
|                                                                                                      | DN 20 | 571219    |
|                                                                                                      | DN 25 | 571220    |
|                                                                                                      | DN 50 | 571221   |
| <b>Electrical connection</b>                                                                         |       |                                                                                              |
| M12 female connector with cable in PUR (Polyurethane), 4-pin, straight, 4 × 0.34 mm <sup>2</sup>     | 2 m   | 571222  |
|                                                                                                      | 5 m   | 571223  |
|                                                                                                      | 10 m  | 571224  |
| M12 female connector with cable in PUR (Polyurethane), 4-pin, angled (90°), 4 × 0.34 mm <sup>2</sup> | 2 m   | 571225  |
|                                                                                                      | 5 m   | 571226  |
|                                                                                                      | 10 m  | 571227  |
| <b>Ground terminal set</b>                                                                           |       |                                                                                              |
| Ground terminal                                                                                      |       | 571217  |

1.) Made of Stainless steel 4404/316L. The corresponding seal made of aramid fibre is also supplied.