
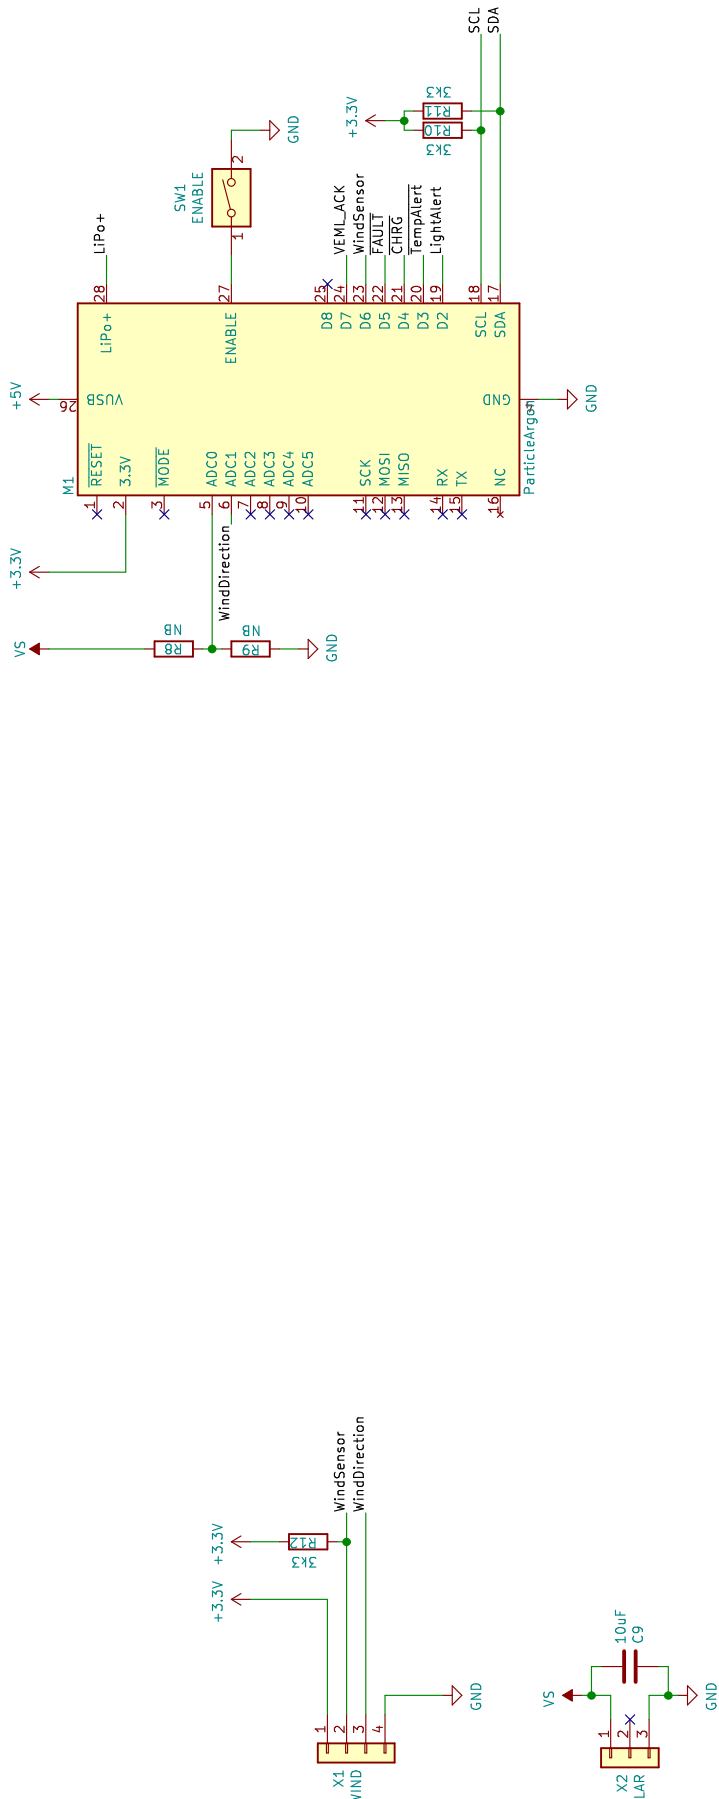


- Set the voltage at the SET testpoint to 2.8 V in maximum sun.
- Connect NTC with battery pack (optional).
- Adjust R8 to increase or decrease the maximum charge current.
- The device is powered by an external solar panel with a minimum output power of 2 W and a voltage from 6 V to 20 V.
- Interface for a Davis Anemometer for wind speed and wind direction measurement.

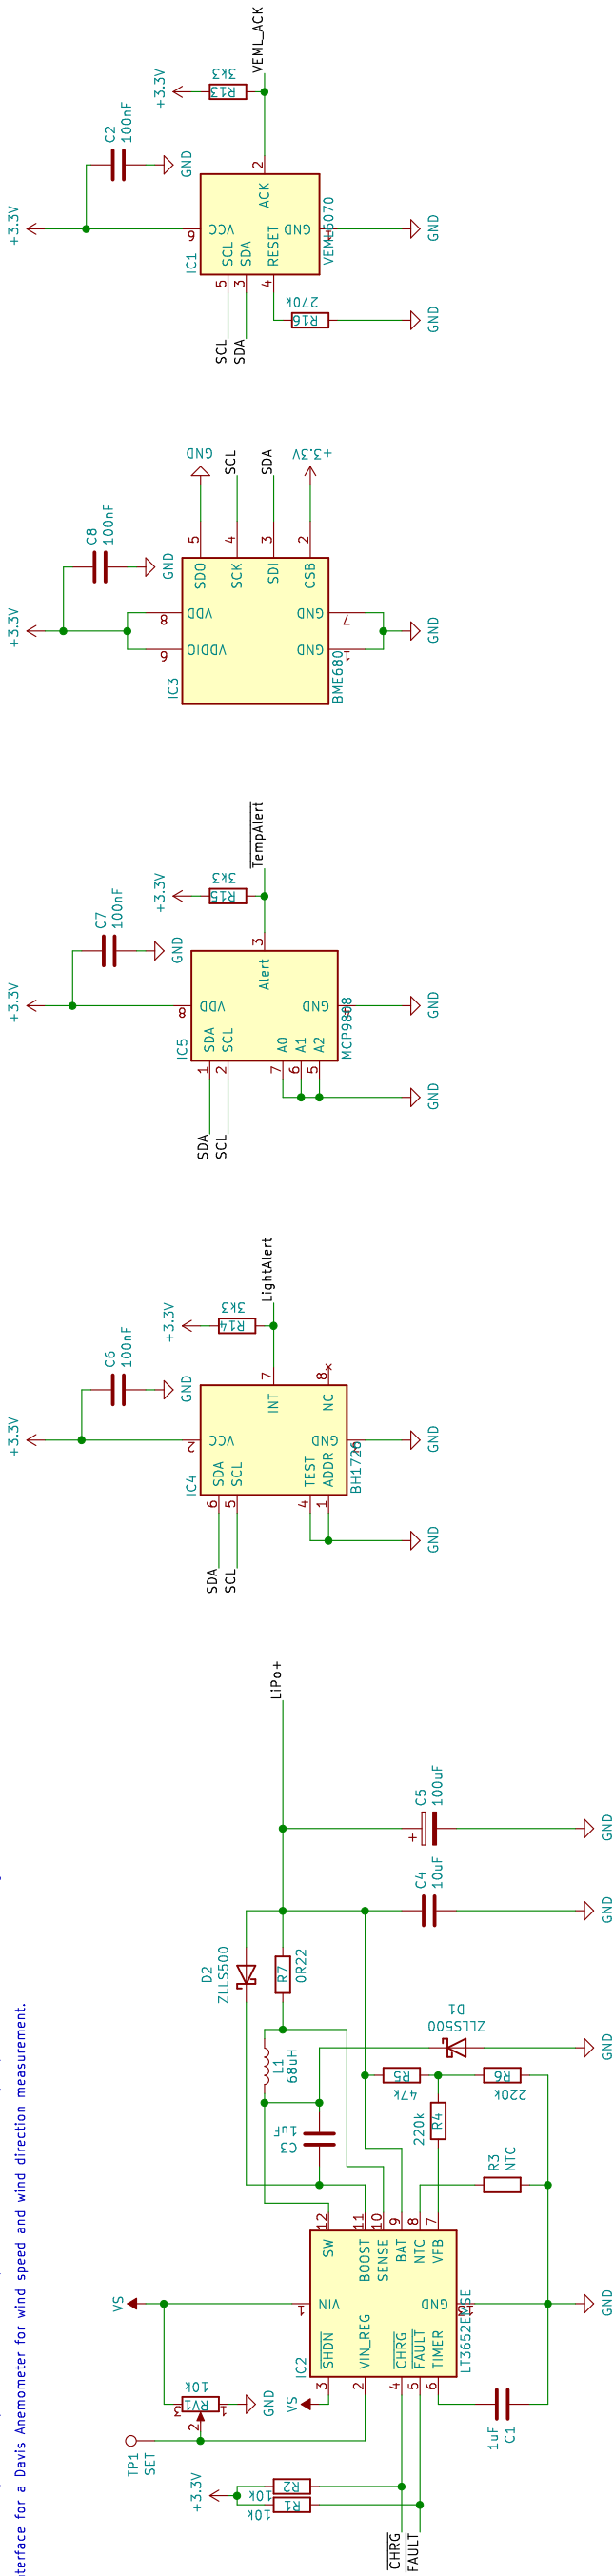

Device	Address
BH1726	0x29
BME680	0x76
MCP9808	0x18
VEML6070	0x38

Sensor Hub

Author: Daniel Kampert
<https://www.kampis-elektroecke.de>

Sheet: /
File: SensorHub.sch

Title: Sensor Hub

Size: A3	Date: 2020-07-11
----------	------------------

Size: A3	Date: 2020-07-11	Rev: 1.1
KiCad E.D.A.	kiCad (5.1.6)-1	Id: 1/1