Schindler 9300

Commercial application

We Elevate

Schindler

Enhancing the urban experience by connecting people to cutting-edge mobility solutions in buildings

We Elevate 2 billion people every day

About Schindler
Our elevators, escalators, and moving walks transport more than 2 billion people up and down buildings and across transit hubs every day. With our customers, we help organize cities: moving people and goods and connecting transportation systems.

Responsibility
We're committed to achieving ambitious short-term climate goals such as transitioning to 100% renewable electricity by 2025, and implementing the ISO 50001 energy management system across all major production sites.

Global presence
Approximately 70,000 employees in over 100 countries serve our customers from more than 1,000 branch offices worldwide, run production sites in eight countries, and operate six R&D facilities around the world.

Schindler escalator division
Our team of skilled experts around the world is dedicated to customer satisfaction and product excellence throughout the entire value chain of escalators and moving walks. We operate five plants worldwide to serve our customers across all regions.

Revolutionizing the

way we move since 1874

We're **focused** on ensuring safety, quality, and customer satisfaction, coupled with unwavering integrity and trust. Built on a legacy spanning five generations, these **values** form the foundation of our organization.

Leveraging our long history, we stand ready to support customers throughout the entire life span of their vertical and horizontal transportation systems, ensuring reliability and innovation for years to come.

1874

Founded by Robert Schindler and Eduard Villiger in Lucerne, Switzerland

1906

Established first international venture in Germany

1936

Installed the first escalator

1955

Starting escalator production in Europe (SED start from 2008)

1974

Expanded to Asia-Pacific with Jardine Schindler joint venture

1979

Expanded to United States

1980

Established first industrial joint venture of the People's Republic of China with a western company

1998

Began operations in Schindler India Pvt.

2014

World's biggest escalator and moving walks plant opened in Shanghai Jiading

2018

Global manufacturing footprint with five operational escalator factories in China, India, Europe, USA and Brazil

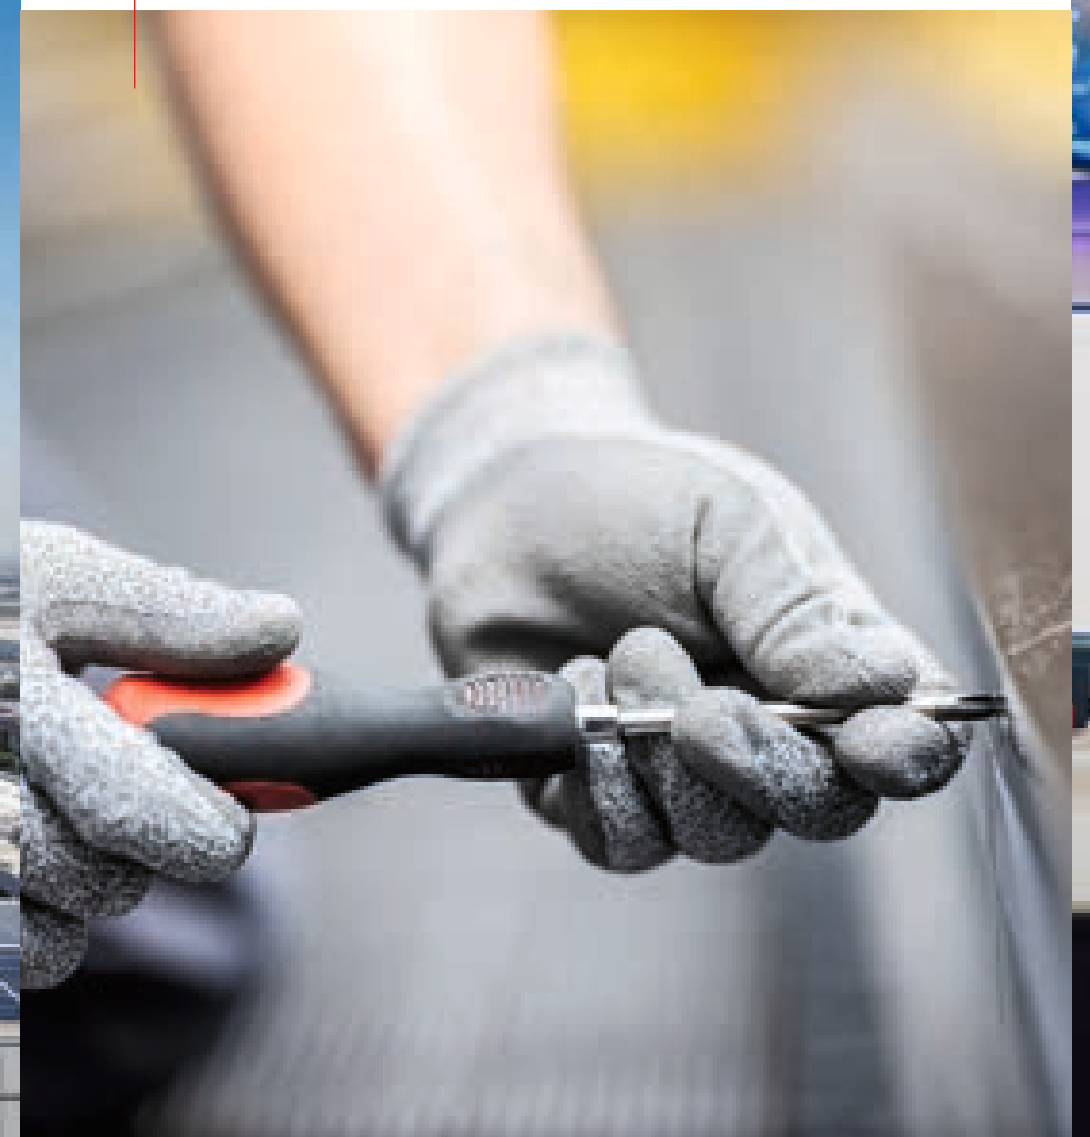

2024

Ramped up effort to connect our units to enhance service quality and reduce CO2 footprint

Schindler 9300

Safe, elegant, compact – Designed to elevate commercial buildings while providing safe and comfortable travel with minimal downtime.

Schindler 9300 is meticulously engineered to deliver a smooth, secure ride and a top-level passenger experience. A broad range of safety features ensures peace of mind for both users and building operators. With high reliability, optimized energy consumption, and a compact, elegant design, the Schindler 9300 maximizes usable space – helping you increase rental potential within your building.

Schindler 9300 — Safe
elegant
compact

Ease at every step

The Schindler 9300 escalator is designed for ambitious architectural projects that demand performance, elegance, and environmental excellence.

01 Reliability and passenger protection
Equipped with state-of-the-art safety solutions

02 Sustainability and energy efficiency
Committed to reducing energy consumption without compromising on performance

03 Architectural flexibility
Designed to release more building space

04 Aesthetics
Elegant visual design and customizable options

05 Digital technologies
Connected to better monitor and reduce downtime

06 High quality in our DNA
Skilled experts and rigorous quality control processes

07 Professional project management
Flawless and safe equipment handling from production to job site

Key figures

Vertical rise (m)	up to 20
Inclination	27.3°, 30°, 35°
Nominal speed (m/s)	0.5, 0.65
Step width (mm)	600, 800, 1,000
Step chain type	Chain rollers inside chain links

Recognized safety expertise

Reliability and passenger protection

Passenger safety is our top priority. For over a century, we've led the way in passenger protection through innovative solutions and advanced installation techniques.

A reputed holistic approach across every phase

We maintain the highest safety and quality standards across the entire life cycle of the Schindler 9300, from production to installation, operation, maintenance, and modernization.

Comprehensive active and passive safety solutions

The Schindler 9300 escalators are designed and engineered to help prevent risks like loss of balance or entrapment. They provide a reliable, safe, and smooth ride for every passenger.

Safety indicators

01 Step with yellow synthetic demarcations
02 Step gap lighting
03 Combplate lighting
04 Direction indicators
05 Emergency stop buttons*

Safety components

06 Step*
07 Guards against climbing the balustrade
08 Safety brake on drive shaft
09 Service brake*
10 Duplex chain*
11 Drive chain monitor
12 Grip plus
13 Antifriction coating
14 Step chain tension contacts*
15 Counter track*
16 Guard plates*

Anti-entrapment

17 Handrail entry brushes
18 Skirt brushes*
19 Step upthrust device*
20 Upthrust contact
21 Step level contact*
22 Combplate contacts*
23 Skirt contacts
24 Handrail entry contacts*

Safety sensors and contacts

25 Speed monitor*
26 Step monitor*
27 Handrail monitor*
28 Electric anti-reversing device*
29 Phase monitoring relay*

Additional safety features

30 Motor protection*
31 Brake lining monitor
32 Fire contact
33 Smoke detector
34 Water level contact
35 Floor cover contact*

Certified code compliance

The TÜV-certified Schindler 9300 escalator meets all international standards, including EN 115-1, GB 16899, HK-COP, ANSI, and ISO 8103-1.

* Schindler standard items.

Key safety features

Strong and durable components

Our escalators prioritize safety. They're designed to the **highest safety standards** to reduce the risk of system-critical failures – ensuring that every ride is both safe and comfortable.

Improved compact and reinforced truss

The optimized truss design with open steel profiles and protection by coating or hot dip galvanization provides long-lasting corrosion resistance. The vibration-isolated end supports prevent sound transmission to the building.

Effective braking system to reduce the risk of falling

With the brake torque adapted to the direction of travel, Schindler's unique braking system minimizes the risk of passengers falling during emergency stops.

Drive shaft designed to last

Our drive shaft design features a robust connection between the hollow shaft and sprocket, delivering durability that exceeds safety standards and significantly lowers the risk of breakage.

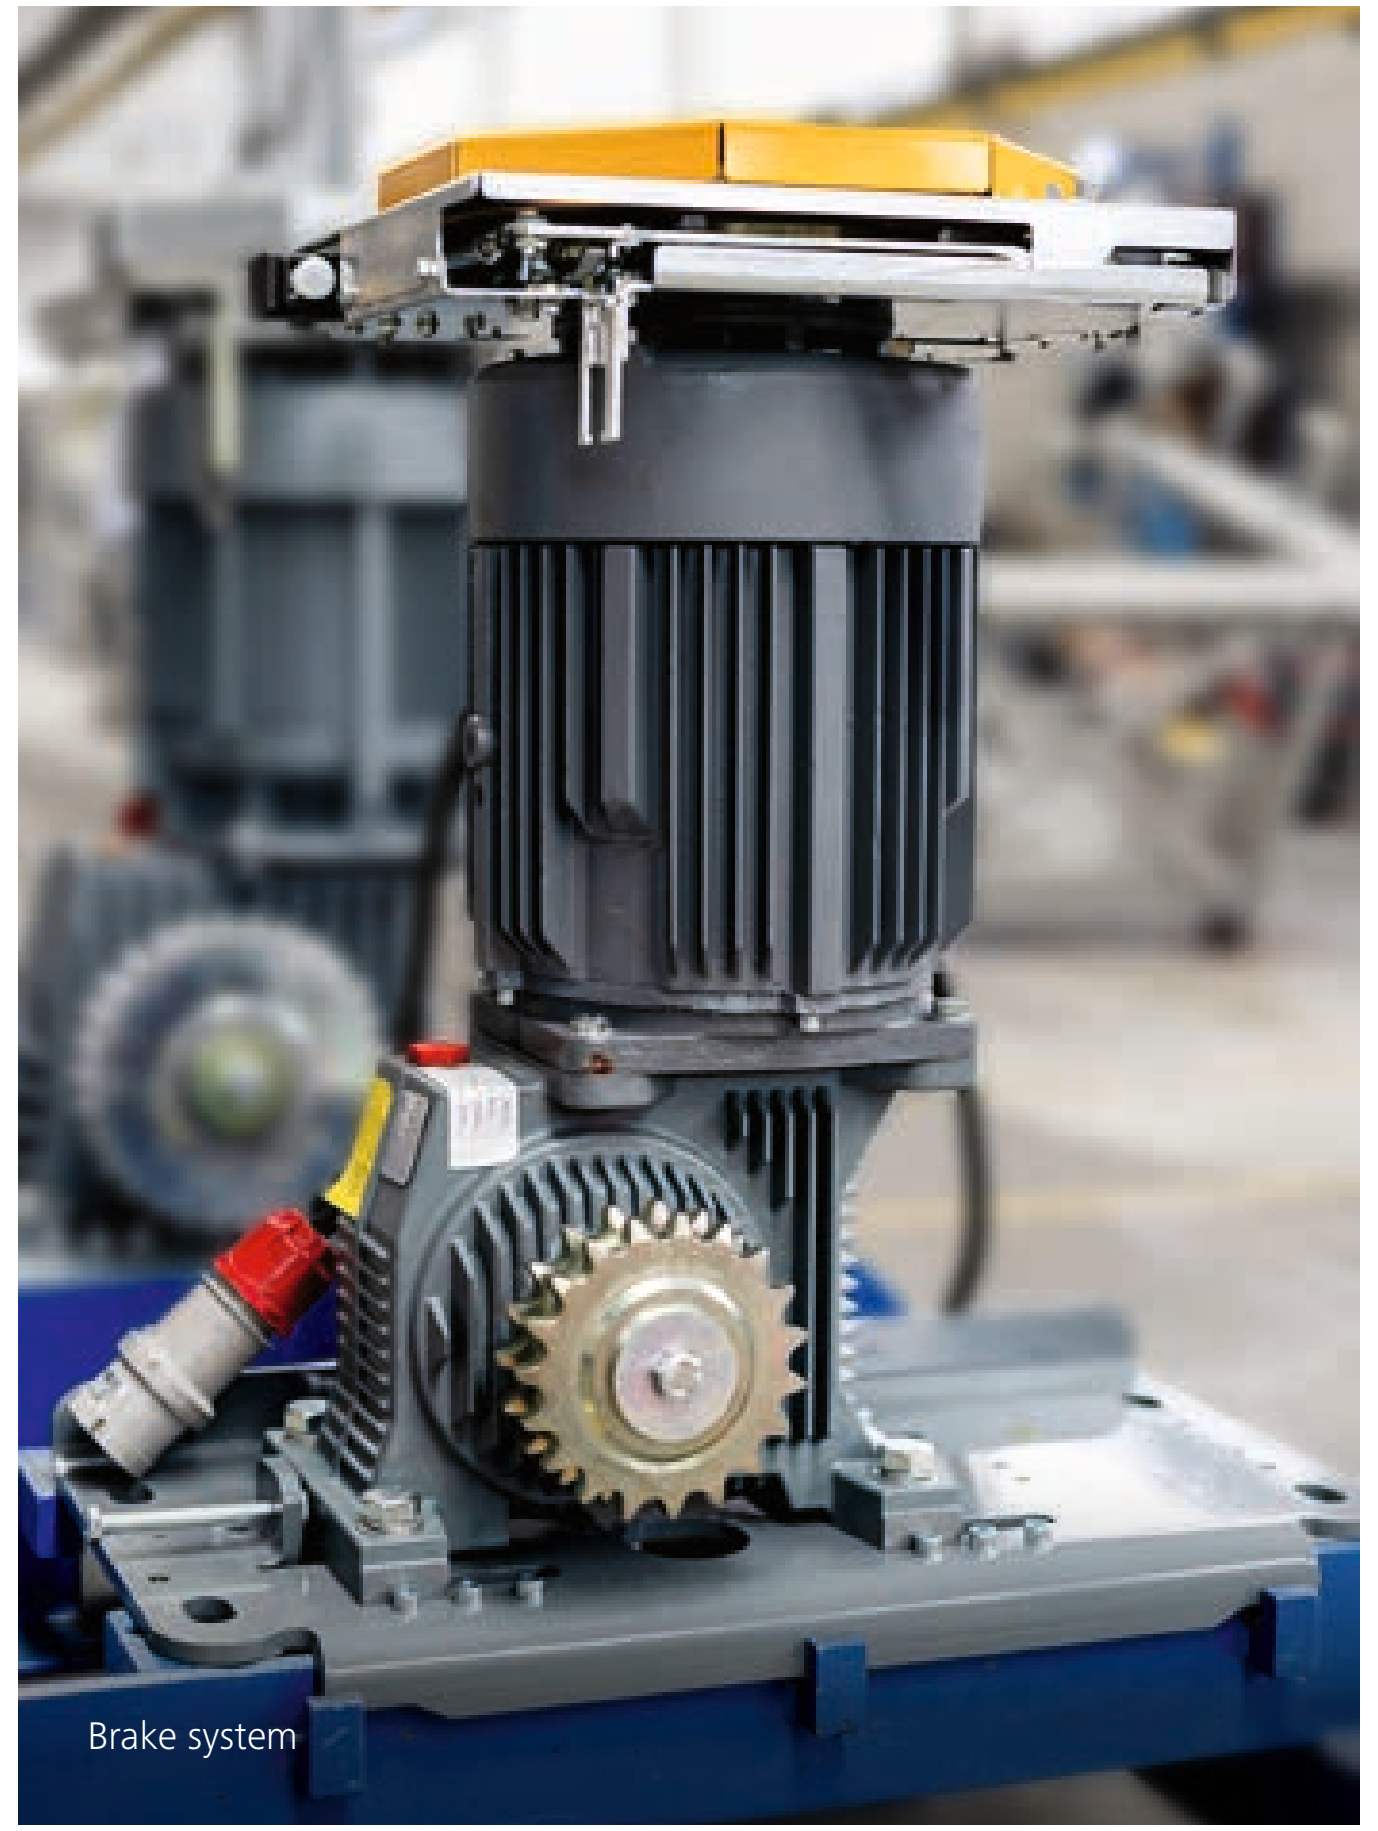

Brake system

Schindler Ultra UV

The Schindler Ultra UV uses invisible germicidal UV-C light to treat the handrails in an efficient and environmentally friendly way during operation. A Pro version with increased UV-C lights is available for heavily used escalators.

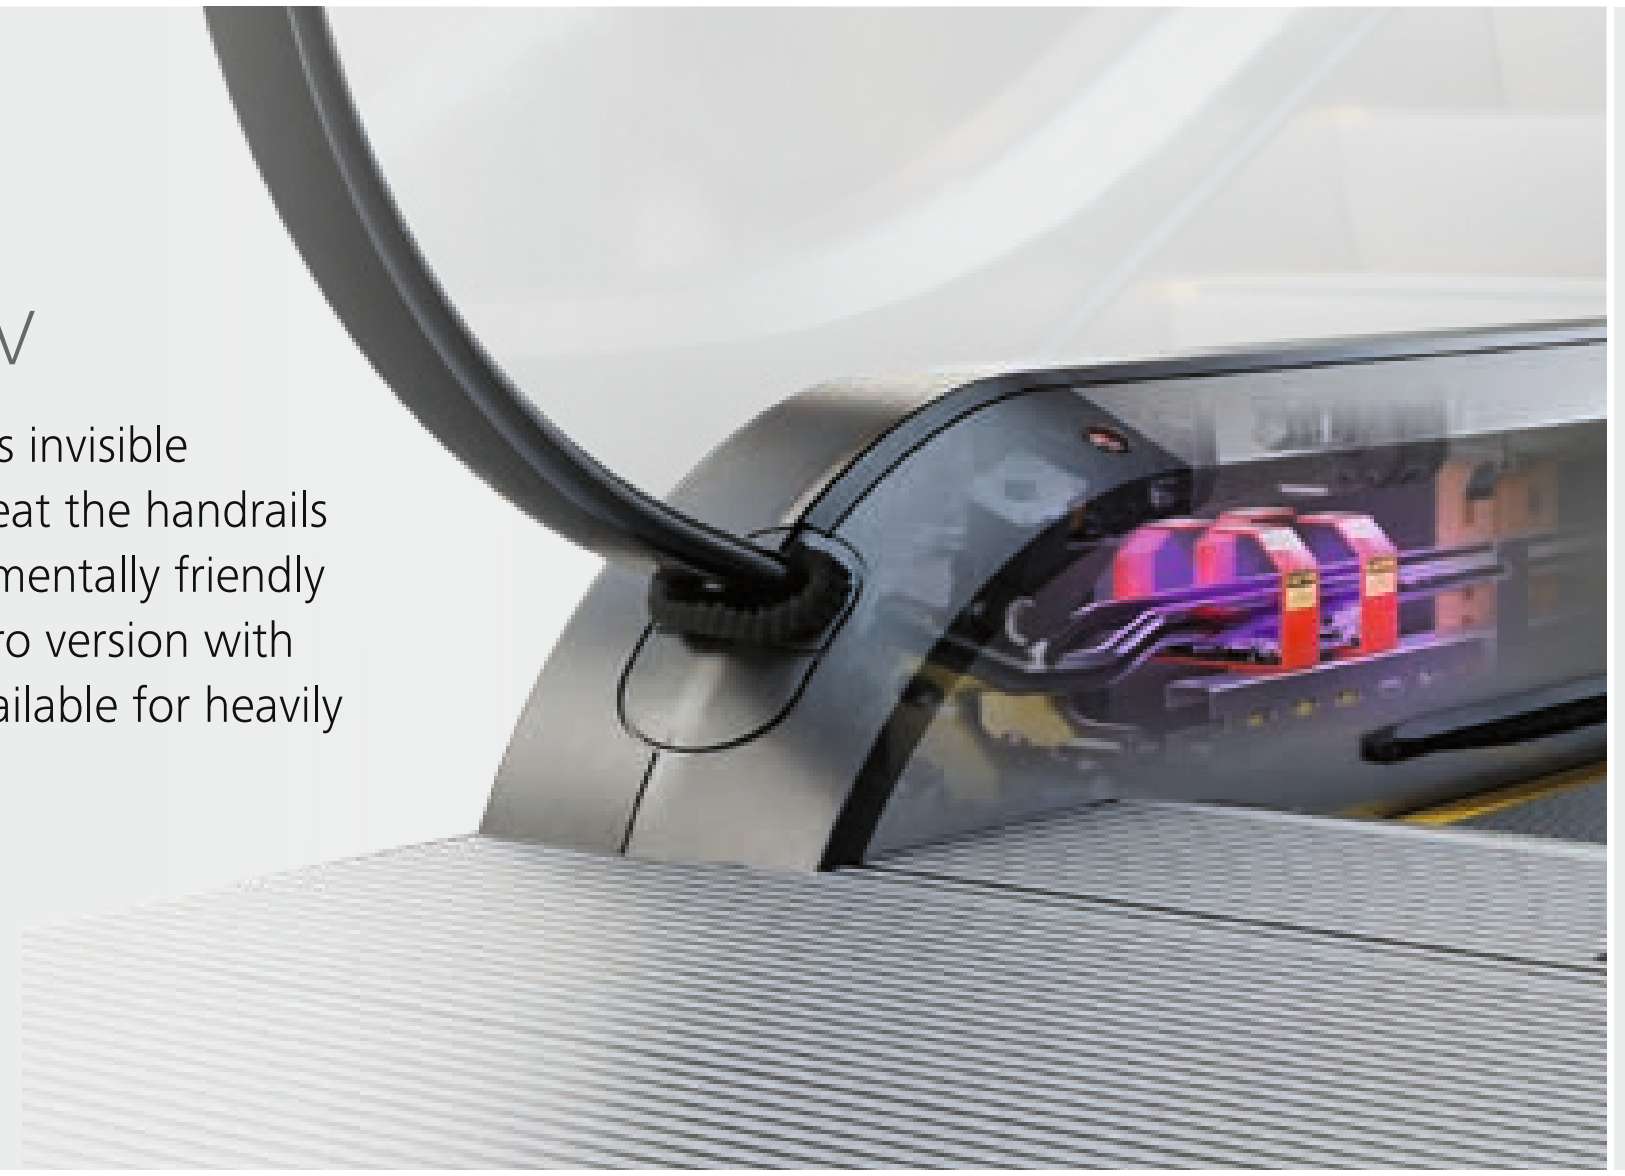

Anti-Fall barrier

Improper use of escalators happens occasionally. Our innovative Anti-Fall product complements the existing balustrade, providing an additional layer of protection. By increasing the barrier height, the risk of passengers falling off the escalator will be significantly reduced, ensuring a worry-free and secure experience.

Double monitoring and control of key safety parameters

The MICONIC F microprocessor controller has two independent safety circuits to monitor the essential safety parameters.

Triple control of speed and unintentional change of direction

The speed and traffic direction are monitored on the motor, step band and handrail. The triple monitoring effectively prevents overspeed and change of direction.

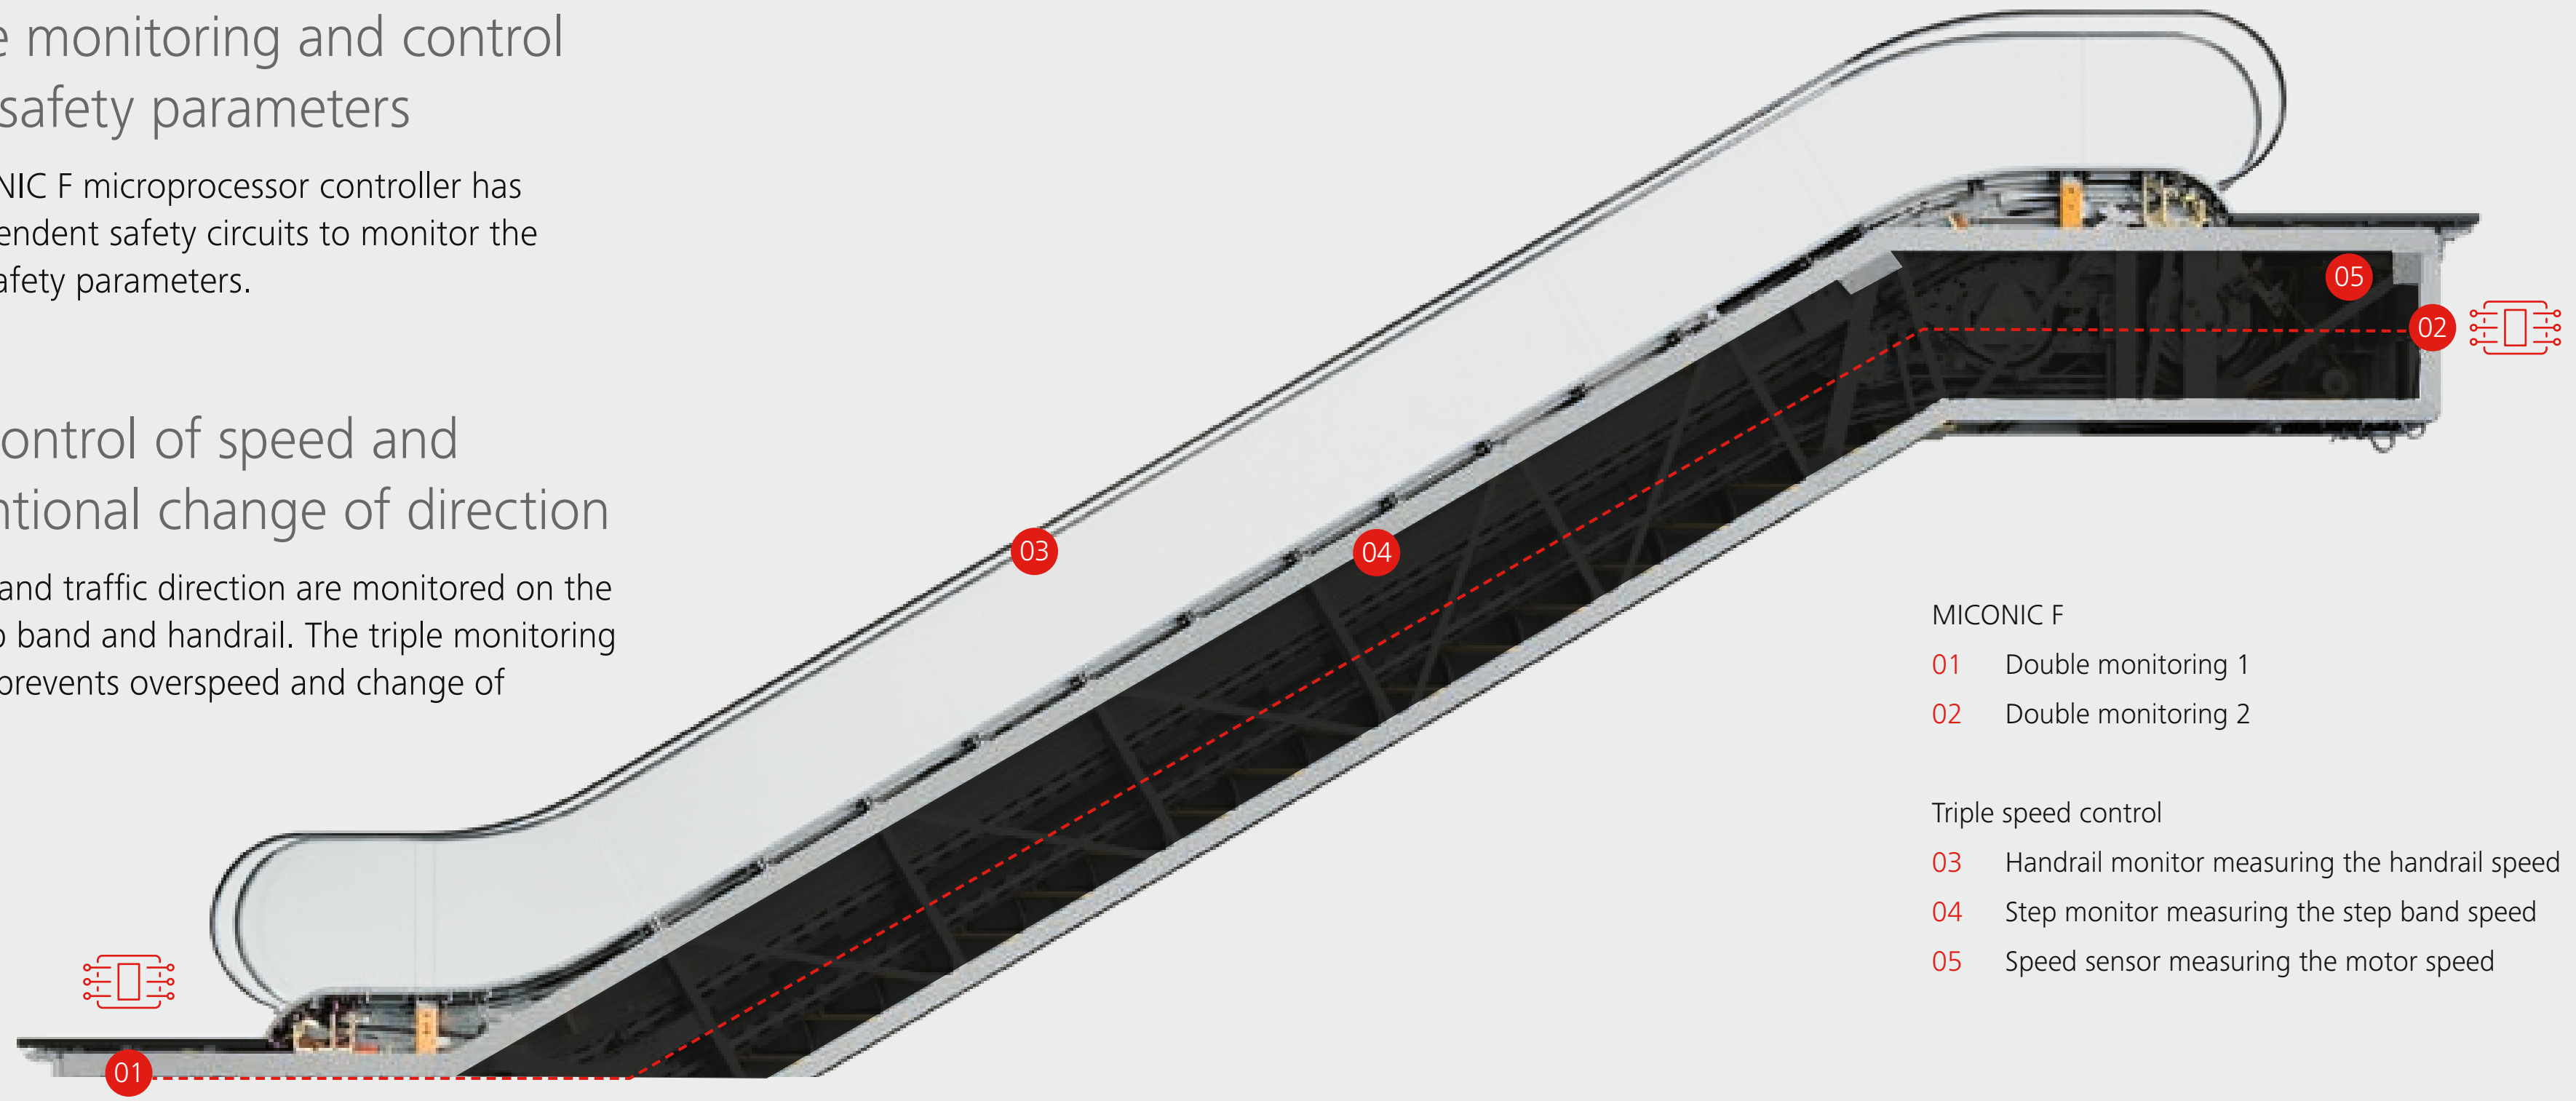

MICONIC F
01 Double monitoring 1
02 Double monitoring 2

Triple speed control
03 Handrail monitor measuring the handrail speed
04 Step monitor measuring the step band speed
05 Speed sensor measuring the motor speed

Passenger-centric solutions

Seamless experience

Our escalators deliver a ride that's not only safe but also exceptionally smooth and comfortable.

Break-resistant aluminum compact steps

Steps are the most important safety component. The in-house produced aluminum mono-block step provides significantly higher break resistance at substantially lower step weight compared to multipart compound steel steps.

Effective passenger guidance

Schindler 9300 is designed to guide all passengers safely on their way to the next floor. Full visual guidance is provided by moving LED direction indicators, fire-resistant step demarcations, yellow signal combs and LED step gap lighting.

Ergonomic and reinforced handrail

The new ergonomic handrail design combines high flexibility with strength and increased breaking load to ensure a long service life. Even small hands can comfortably hold the handrail.

Standing safe

Innovative features such as slip-resistant steps, with optional screw-free safety demarcations, aesthetic skirt brushes, and with skirt anti-friction coating ensure a safe foot hold.

Sustainability and energy efficiency

Shaping more sustainable cities, together

We're committed to delivering **environmentally friendly solutions** that align with our customers' sustainability goals. By continuously innovating and applying sustainable practices, we ensure our escalators achieve the **highest energy efficiency** classification.

A global manufacturing footprint

We maintain close proximity to our customers by operating escalator factories globally, which significantly reduces transportation CO_2 emissions. All of the electricity we use in our largest factory in Shanghai is generated from renewable sources, including from solar power panels mounted on our buildings.

Health Product Declaration (HPD)

Schindler has HPDs verified by a third party, providing additional credits for LEED and others.

Environmental Product Declaration (EPD)

Environmental Product Declarations (EPDs) are recognized by green building certification schemes, including LEED, DGNB, BREEAM, and Green Mark, which enable our customers to receive credits for their building certification projects.

Our ECO operation management systems can increase energy efficiency beyond A+++ standards, in compliance with ISO 25745-3

Sustainability and energy efficiency

Saving wherever we can

Energy-efficient solutions to lower energy consumption

The majority of energy consumption result from the daily operation of escalators. Therefore, prioritizing the reduction of energy consumption during the use phase is key for minimizing impact.

The exact proportion of CO_2 emission can be found in Schindler EPD documents for your region.

State-of-the-art drive systems

Our advanced drive systems integrate motors with IE3 premium efficiency or IE4 super premium efficiency alongside high-efficiency helical gears. An energy efficiency class better than A+++ can be achieved, above ISO 25745-3 standards.

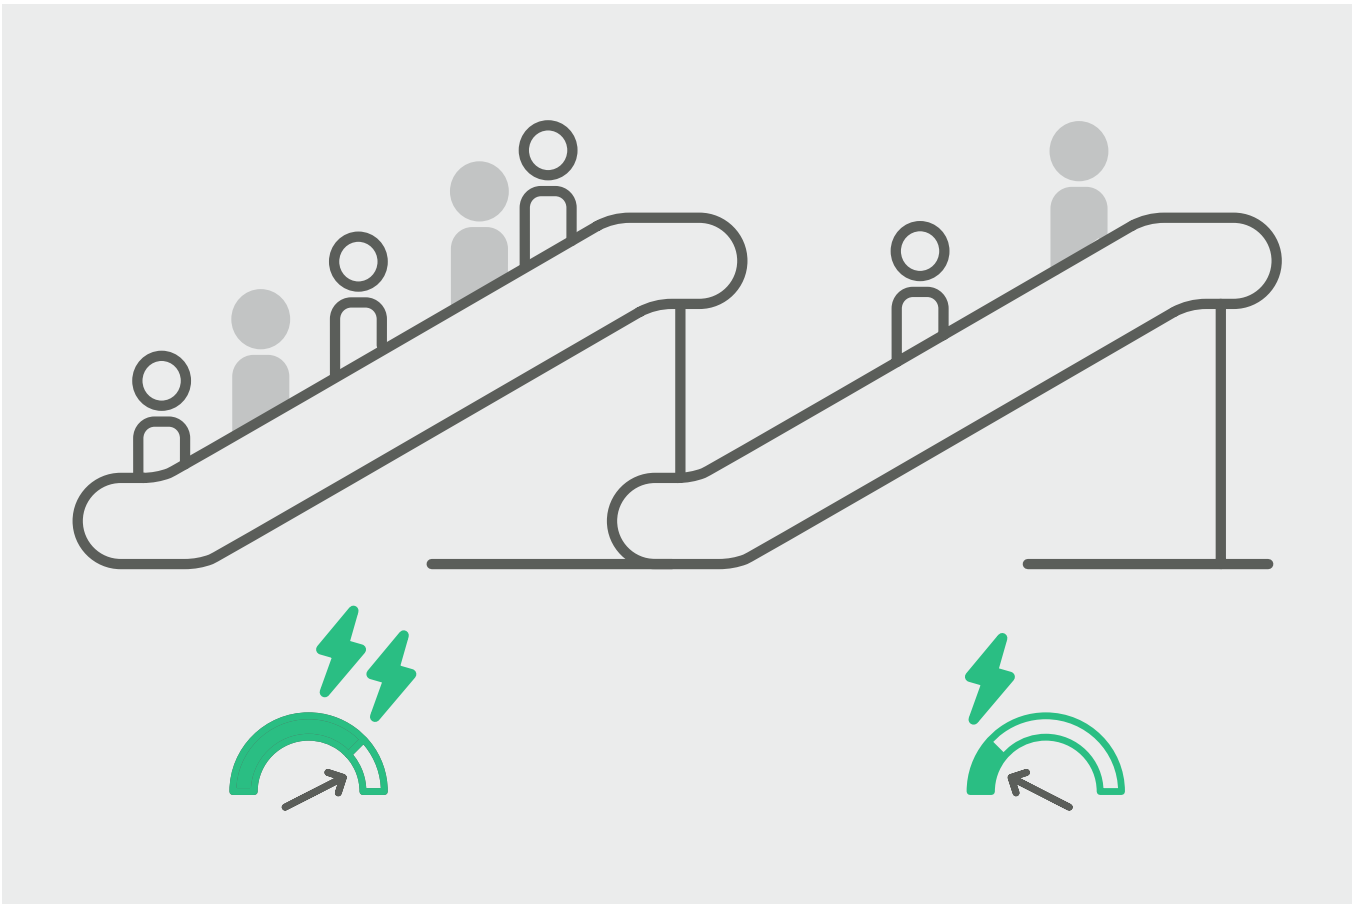

Digital maintenance solutions

Connected units provide clear insights into your equipment's health. Callouts are reduced by up to 40 percent* and downtimes by an average of 34 percent*. Connecting your units also lowers maintenance-related carbon emissions.

*Callout and downtime reduction rates are based on the outcomes observed at a site after one year of operation, where all Schindler escalators installed were connected via the Schindler Cube.

Design for circularity

We prioritize the use of environmentally friendly materials, ensuring that up to 97 percent of the metals in our escalators are recyclable at the end of their service life. We're also increasing the use of secondary aluminum for components such as steps and pallets.

Our aluminum steps maximize CO_2 efficiency

Our aluminum steps and pallets, produced in-house, are among the most durable in the industry. By choosing aluminum over steel, we have achieved a significant weight reduction of 40 percent, resulting in a 5 percent increase in overall operational efficiency and an extended life span.

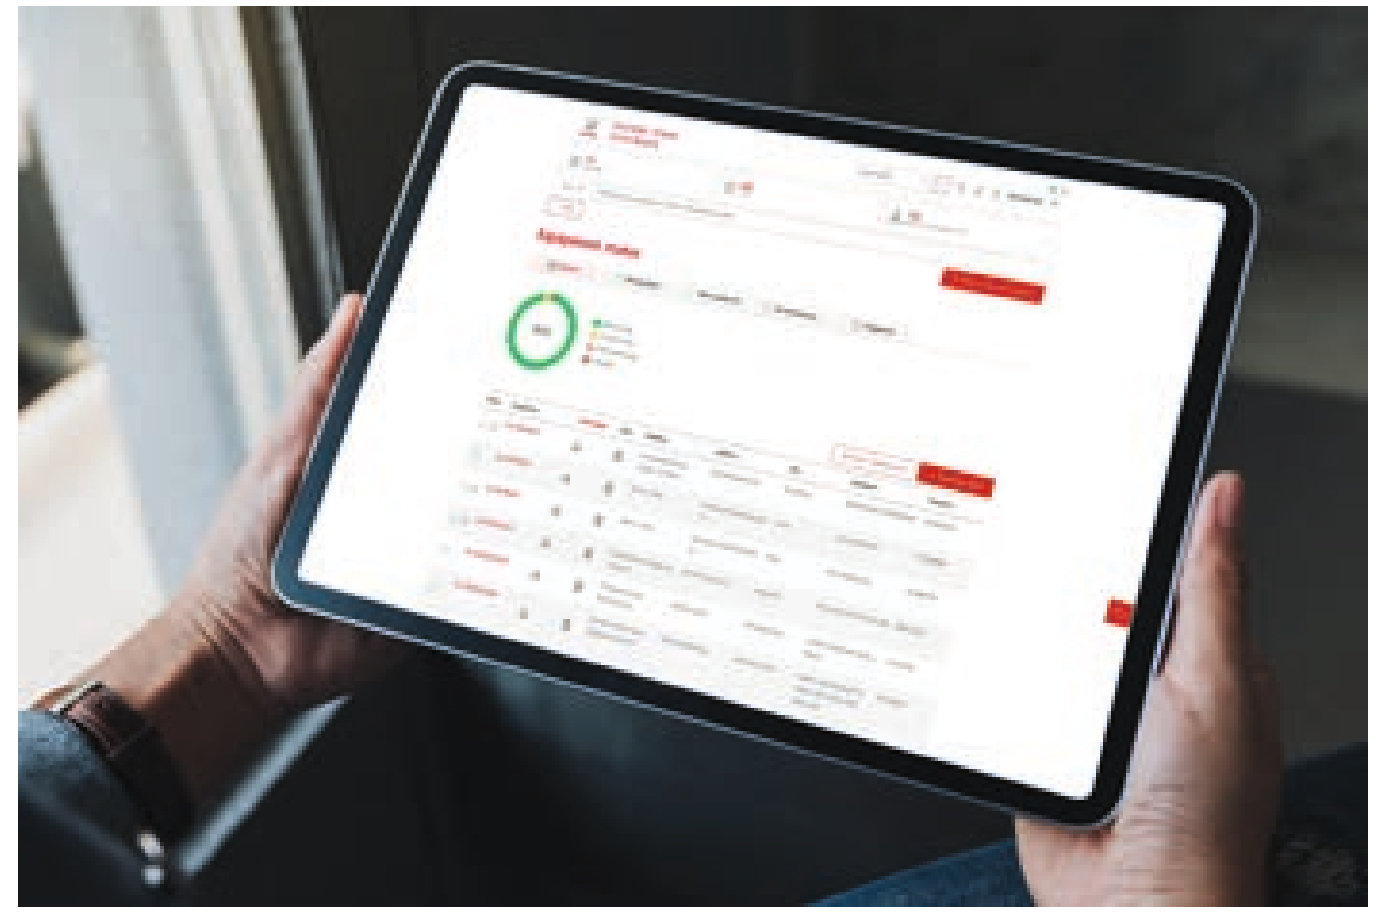

Smart operation management

Save energy when there are few passengers. When the system detects low volumes, the ECO Mode can reduce energy consumption by up to 25 percent at nominal speed. The stop-&-go or crawling speed operation additionally saves energy. Extra energy is generated from downward travel.

Modernization to the latest standards

Breathe new life into your buildings. Our repair and modernization solutions ensure reliable performance at any stage of the product's lifecycle. Upgrading escalators with energy-saving options or rebuilding them within the existing truss can significantly boost equipment performance and operation efficiency.

Design

Unleash your creative vision

Your vision, our expertise

Embrace your creativity by integrating
our escalators into your building's design.
Create a seamless and harmonious journey
for your tenants and visitors.

Architectural flexibility

Compact design for more building space

The “Enlarge Space” concept we follow revolutionizes escalator design by expanding the overall width without reducing step width, ensuring passenger comfort and safety. This approach frees up valuable space, opening up opportunities to increase rental spaces.

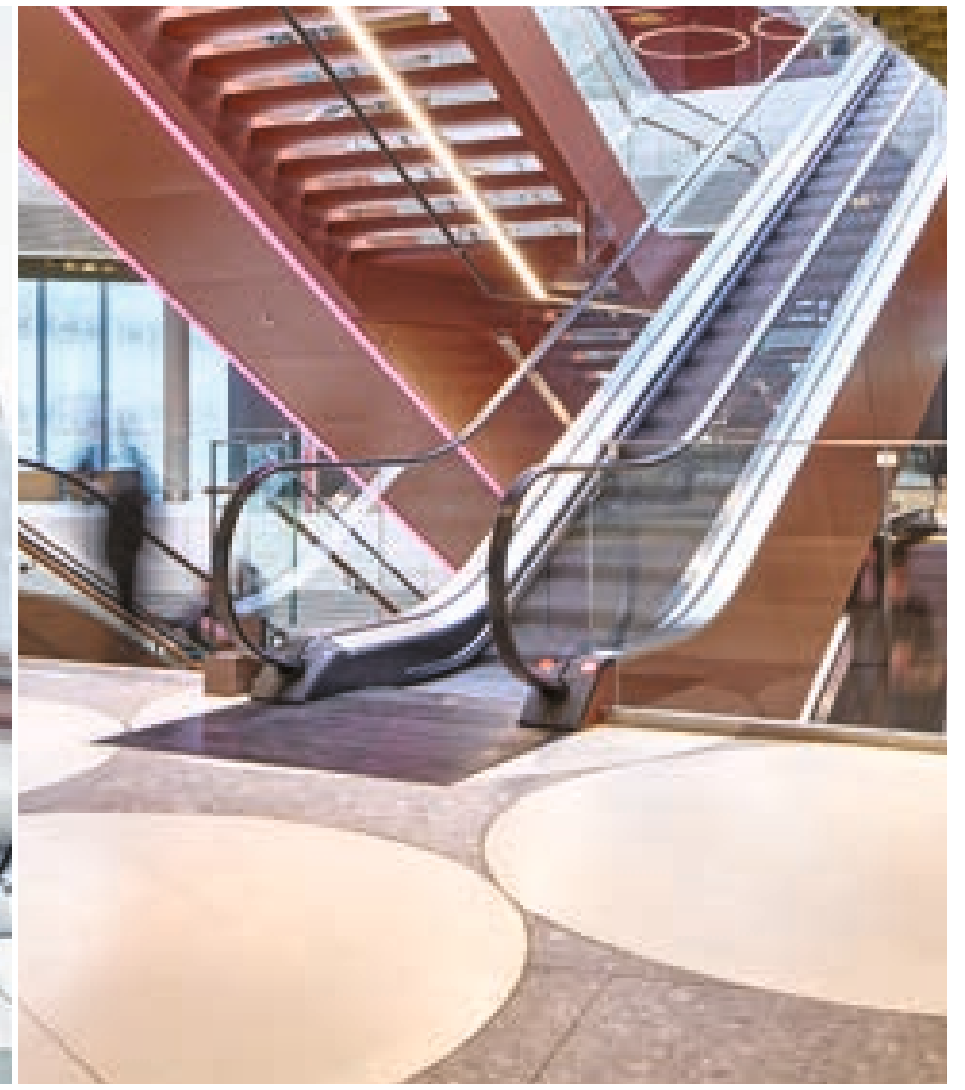

More space at entry and exit

The balustrade has been shortened, creating more space in front of the escalator at each landing.

Reduced overall escalator width

The overall width of the escalator has been reduced while retaining the same nominal step width, resulting in more rental space in your building.

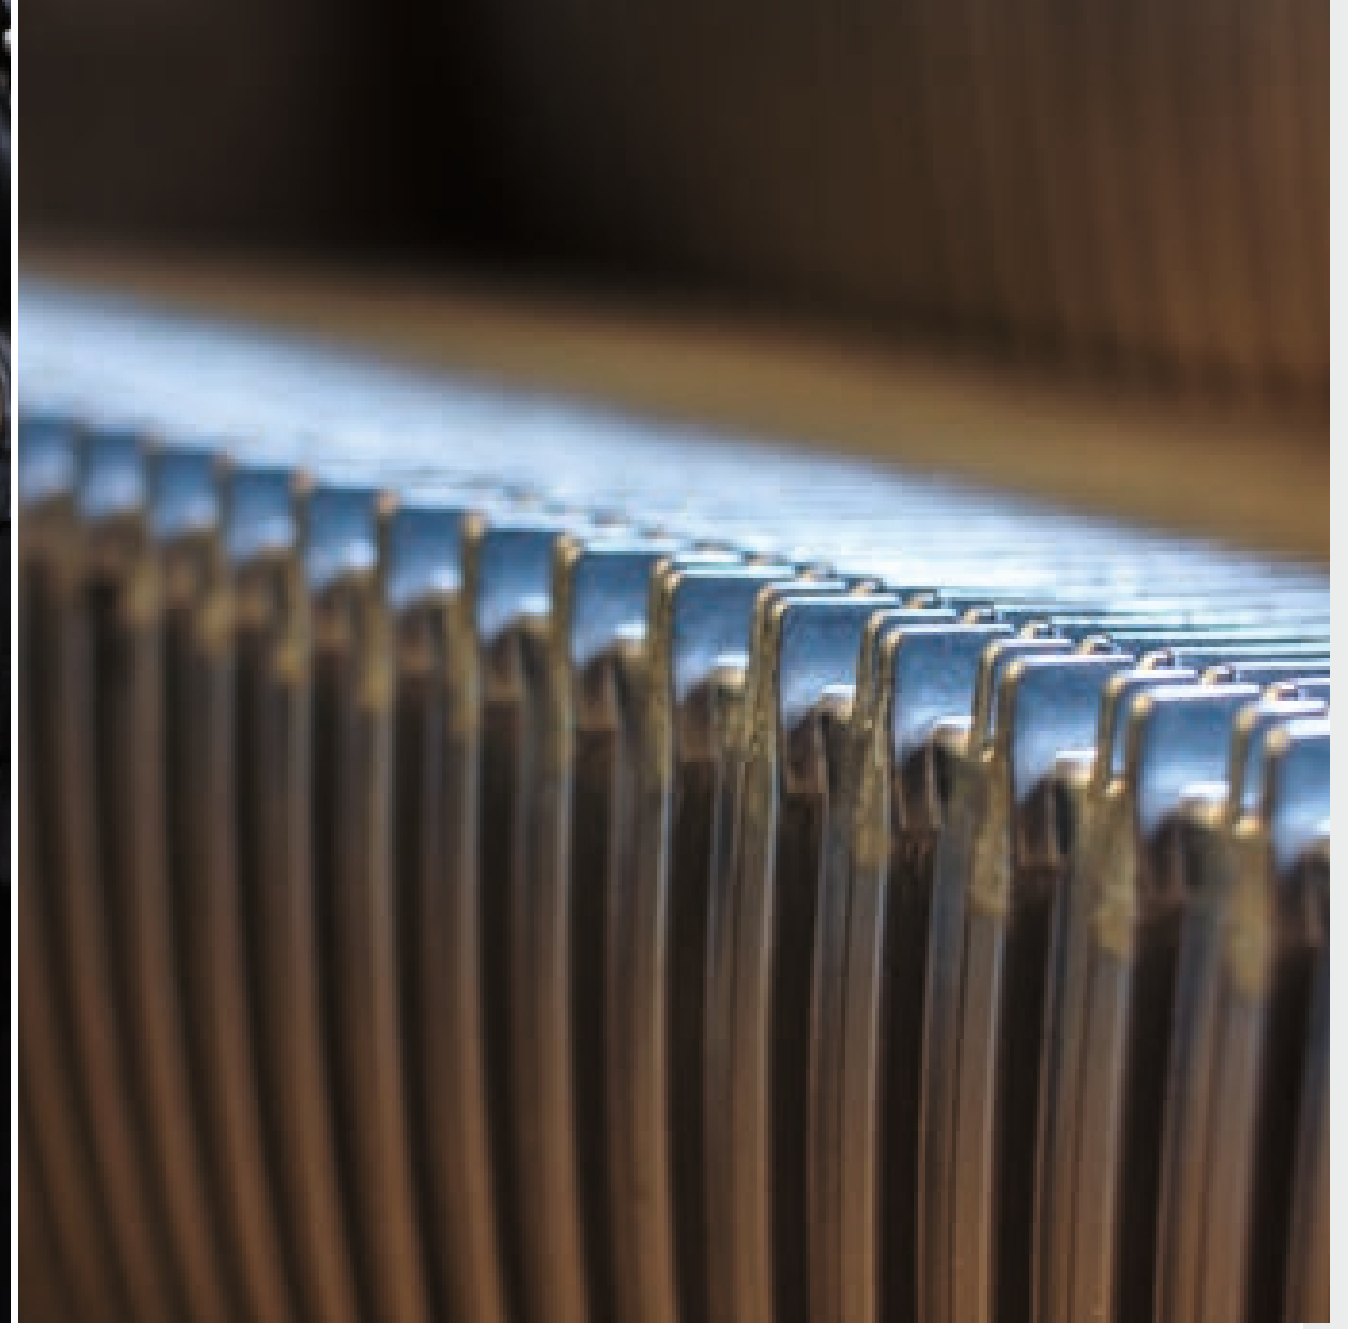

Aesthetics

With its timeless design, the Schindler 9300 escalator is crafted to seamlessly blend into your building's interior – whether it's a shopping mall, stadium, or office building. A wide range of customizable options is available to create an outstanding look.

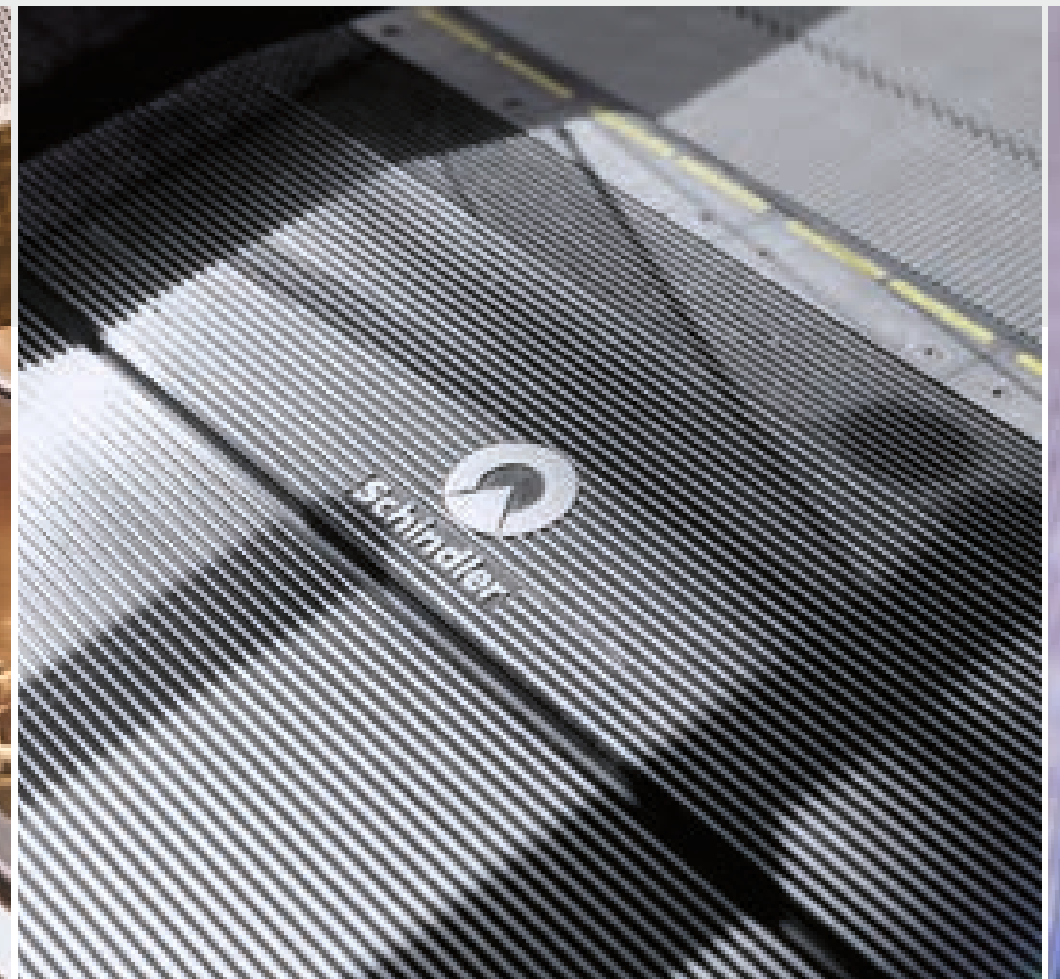

Aesthetics

In harmony with your building

Customize the Schindler 9300 escalator to complement your building's architectural style and functionality. Choose from our standard configurations or explore extensive design possibilities to elevate your space.

Note:
Specifications, options, and colors are subject to change. All options illustrated in this brochure are representations only. The samples shown may vary from the original in color and material.

Floor cover

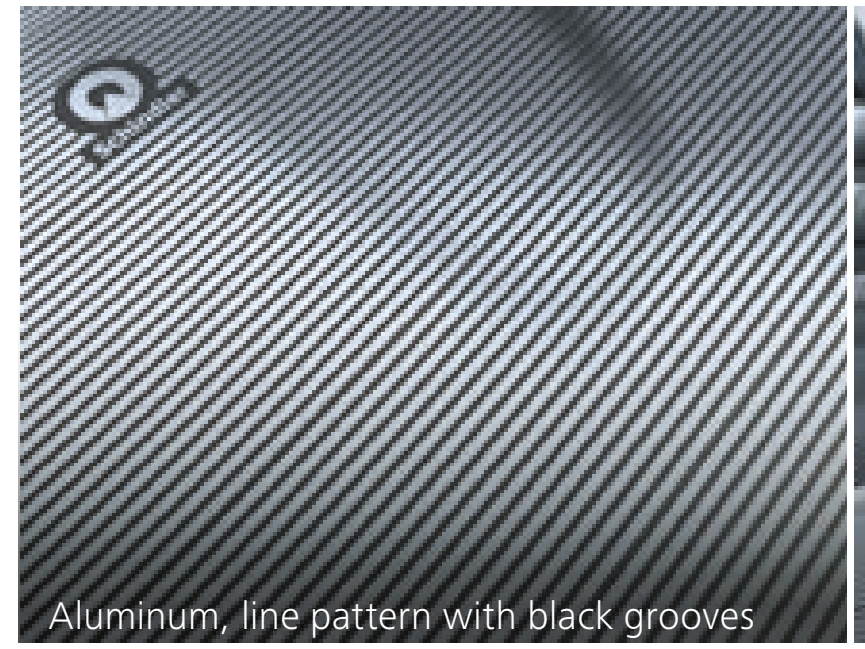
Aluminum, line pattern with black grooves

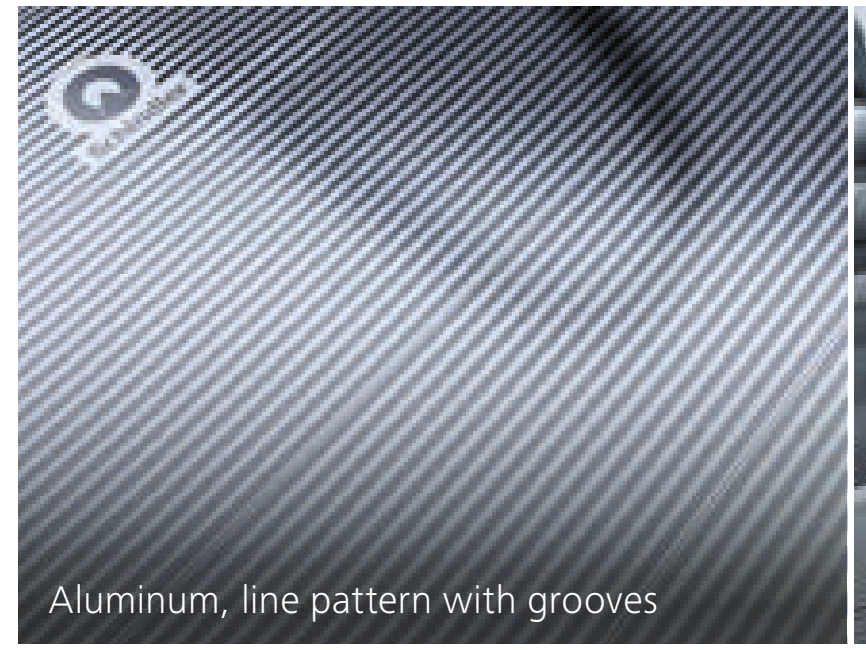
Aluminum, line pattern with grooves

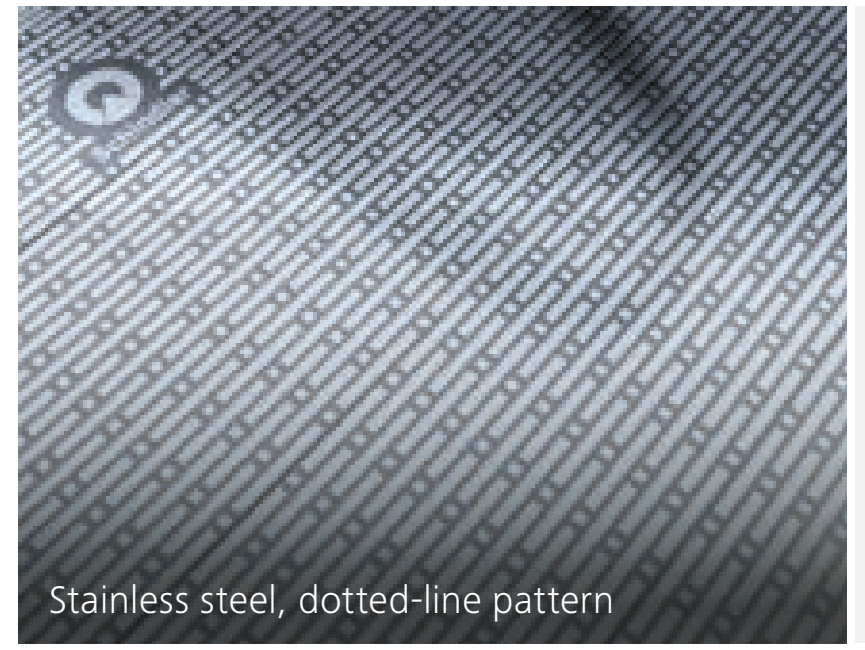
Stainless steel, dotted-line pattern

End cap


Stainless steel decking

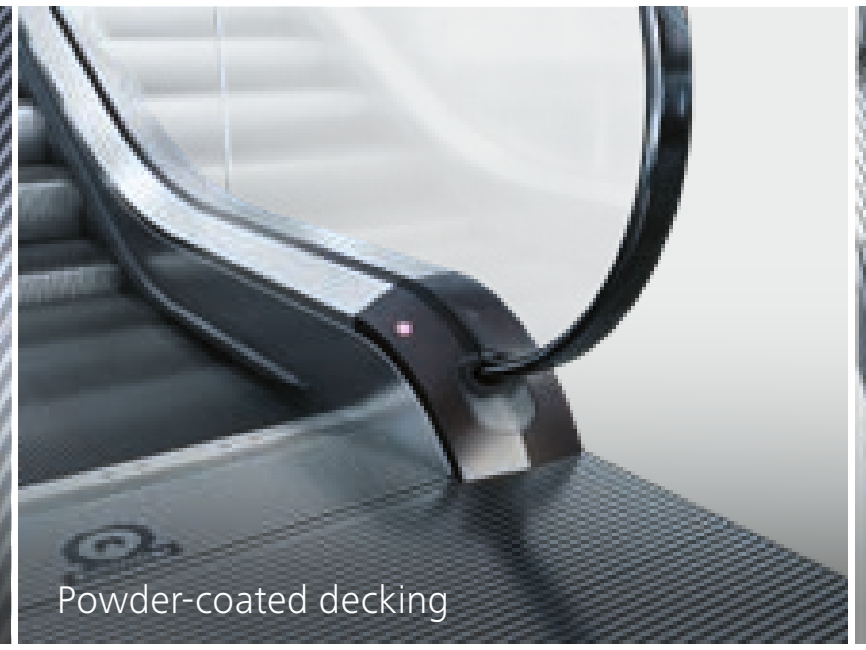
Powder-coated decking

Step

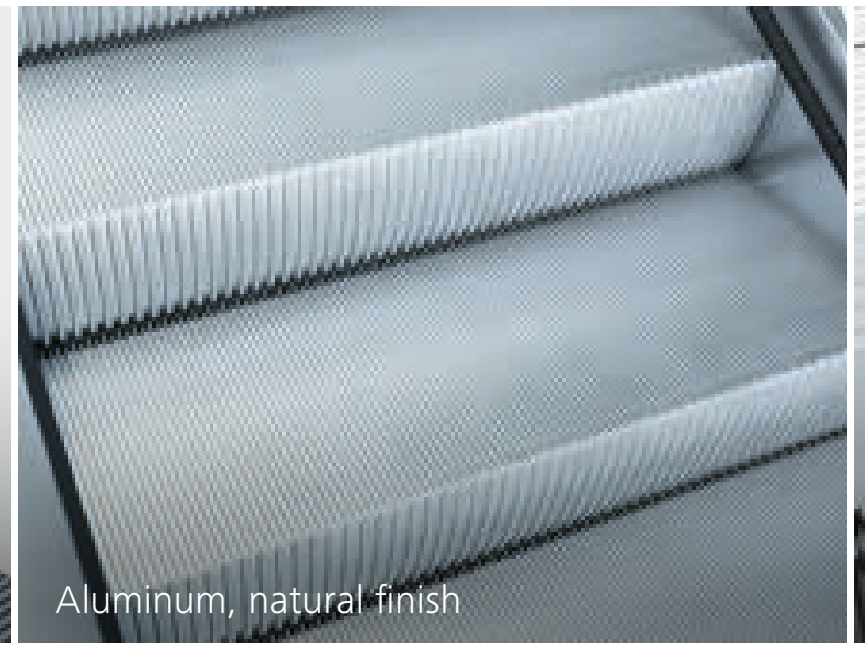
Aluminum, natural finish

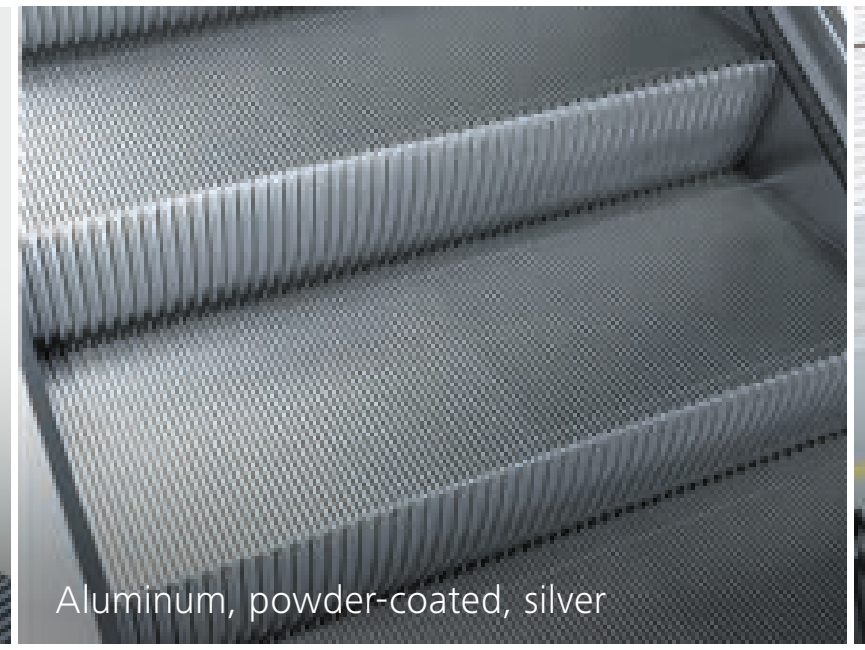
Aluminum, powder-coated, silver

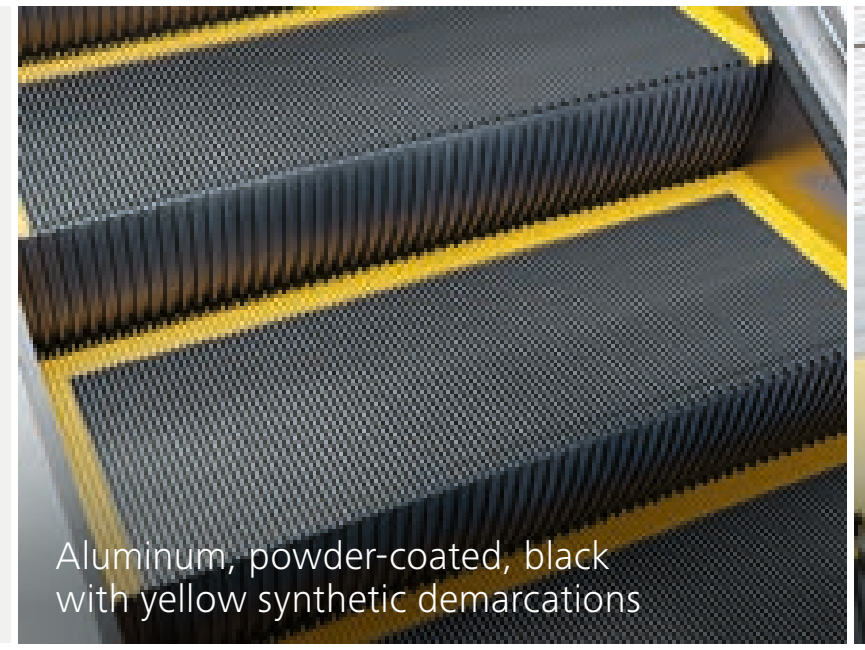
Aluminum, powder-coated, black with yellow synthetic demarcations

Comb


Aluminum, natural finish

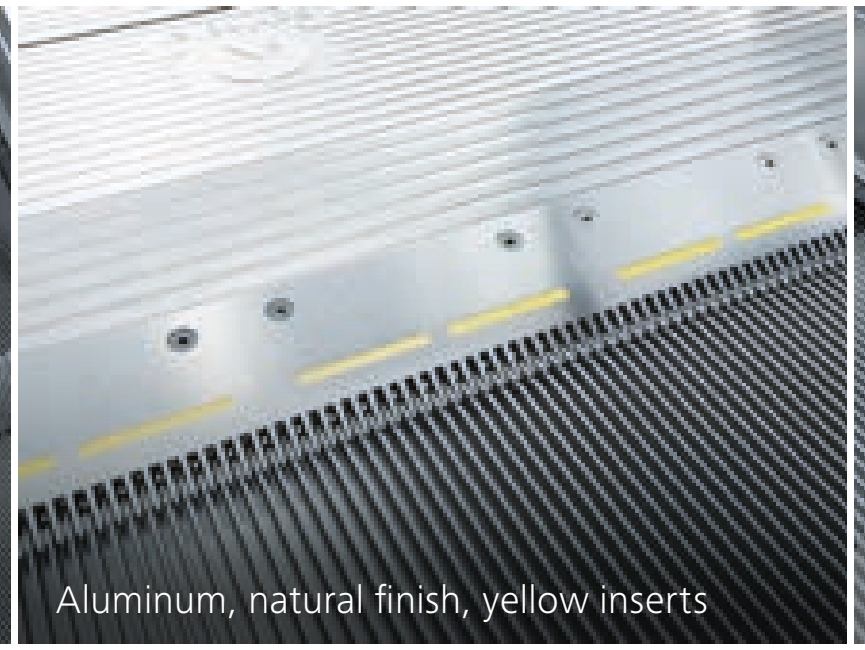
Aluminum, natural finish, yellow inserts


Aluminum, powder-coated, yellow

Skirt panel

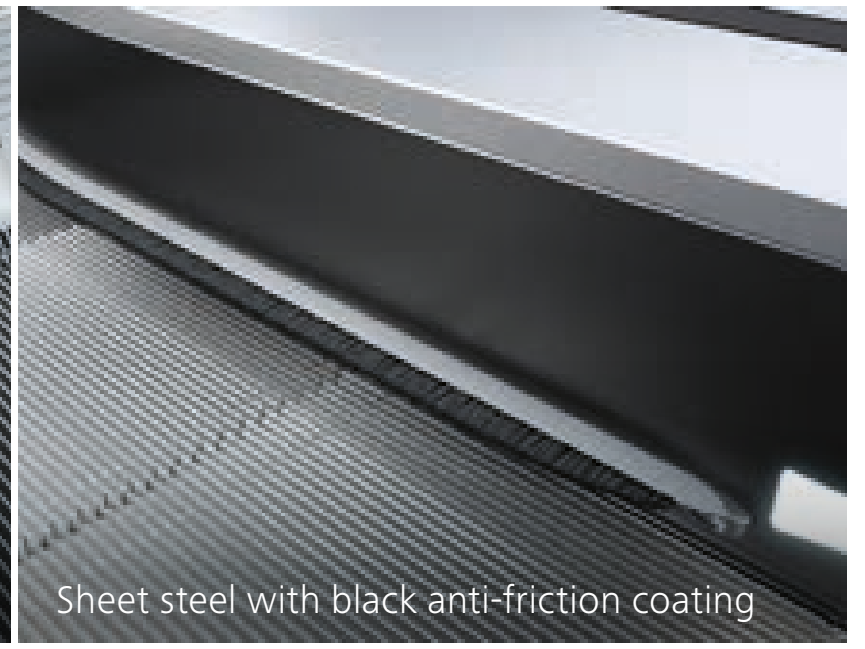
Sheet steel with black anti-friction coating


Stainless steel

LED lighting & handrails


Skirt lighting, linear, white


Balustrade lighting, white


Direction indicator integrated into skirt panel

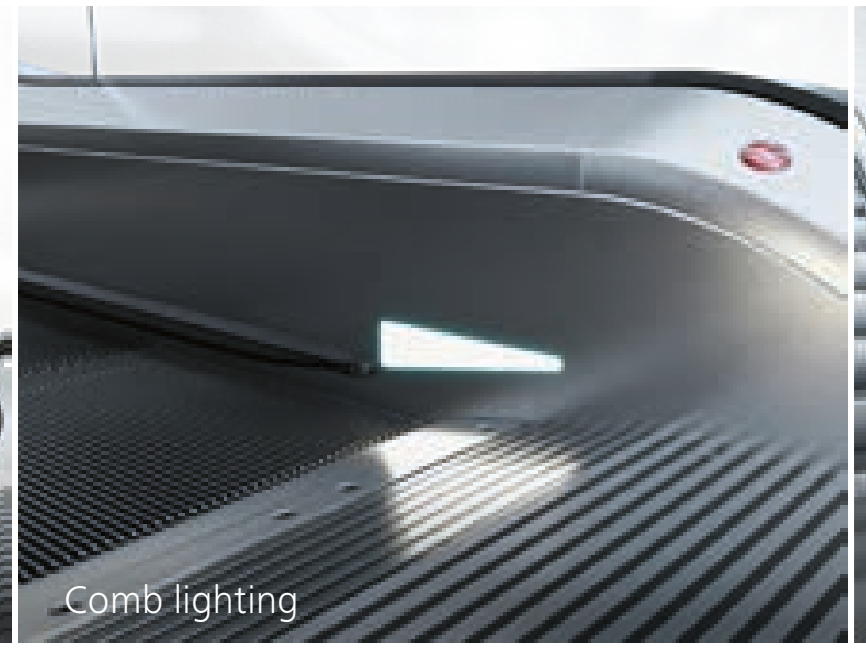
Comb lighting


Black handrail

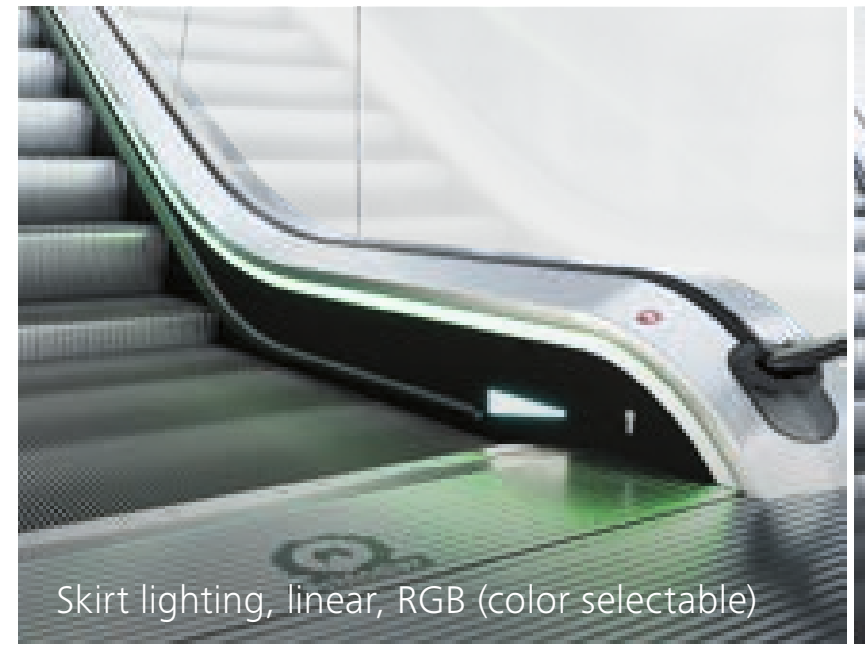
Skirt lighting, linear, RGB (color selectable)


Balustrade lighting, RGB (color selectable)


Direction indicator integrated into handrail entry (standard)

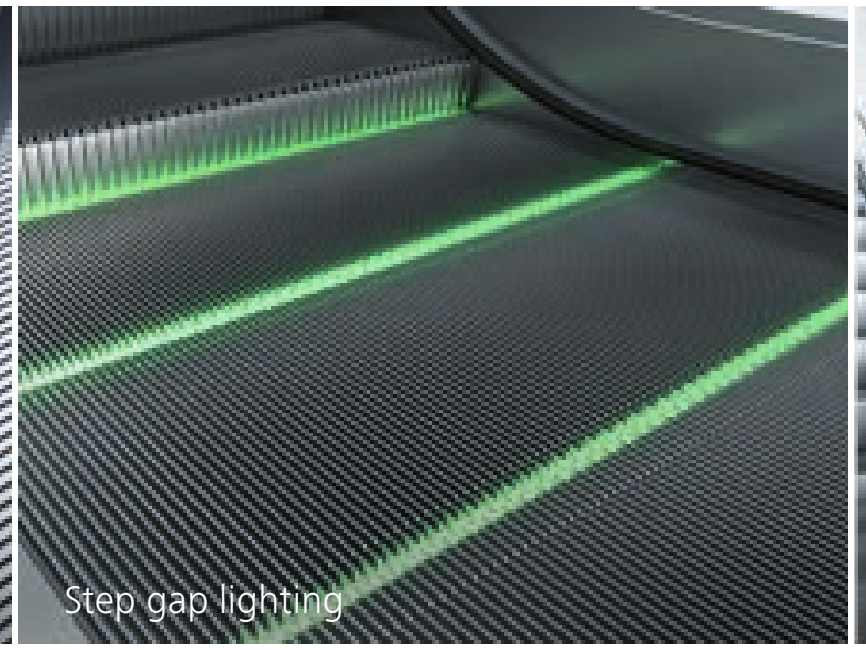
Step gap lighting


Red handrail


Skirt lighting, spots, white


Premium direction indicator on outer decking


Handrail with movement direction signage

Above and beyond

With next generation escalator service

Thanks to the **latest digital technologies**, your escalator is easy to service and troubleshoot. You can **benefit** from faster response times, improved performance, and higher uptimes.

Global expertise

By harnessing the collective expertise of over 40,000 professionals worldwide through a dynamic crowd-sourced knowledge base, we ensure industry-leading uptime and minimal disruption for every Schindler customer.

Schindler ActionBoard

Remotely check equipment status, view real-time performance data, monitor maintenance schedules, and track current energy consumption levels.

Real-time remote services

Schindler Performance Callback is an AI-powered system that monitors Schindler escalators round the clock. It swiftly detects issues via sensors and triggers automated service requests, ensuring prompt action during breakdowns.

Lifetime partnership

We go beyond the initial installation of escalators, establishing lasting relationships to provide the highest quality service and modernization of your escalators for years to come.

Measure and monitor your escalator

on the go

Schindler EscalatorScreen

Turning escalators into communication platforms

Our cutting-edge ultra-thin LED display can showcase **promotional and entertaining content** directly on your escalator balustrades.

Superior quality and effortless integration

Outstanding color stability, UV-resistant, and all-in-one LED-light design produce reliable, vibrant displays. The ultra-thin 2.5 mm foil installs hassle-free on pre-existing equipment.

Seamless content management

Share valuable and engaging information with your building community and visitors. Monetize your mobility assets with targeted communication messages, all easily managed from a single and intuitive web-based content management system (CMS).

Capture attention with

impactful content

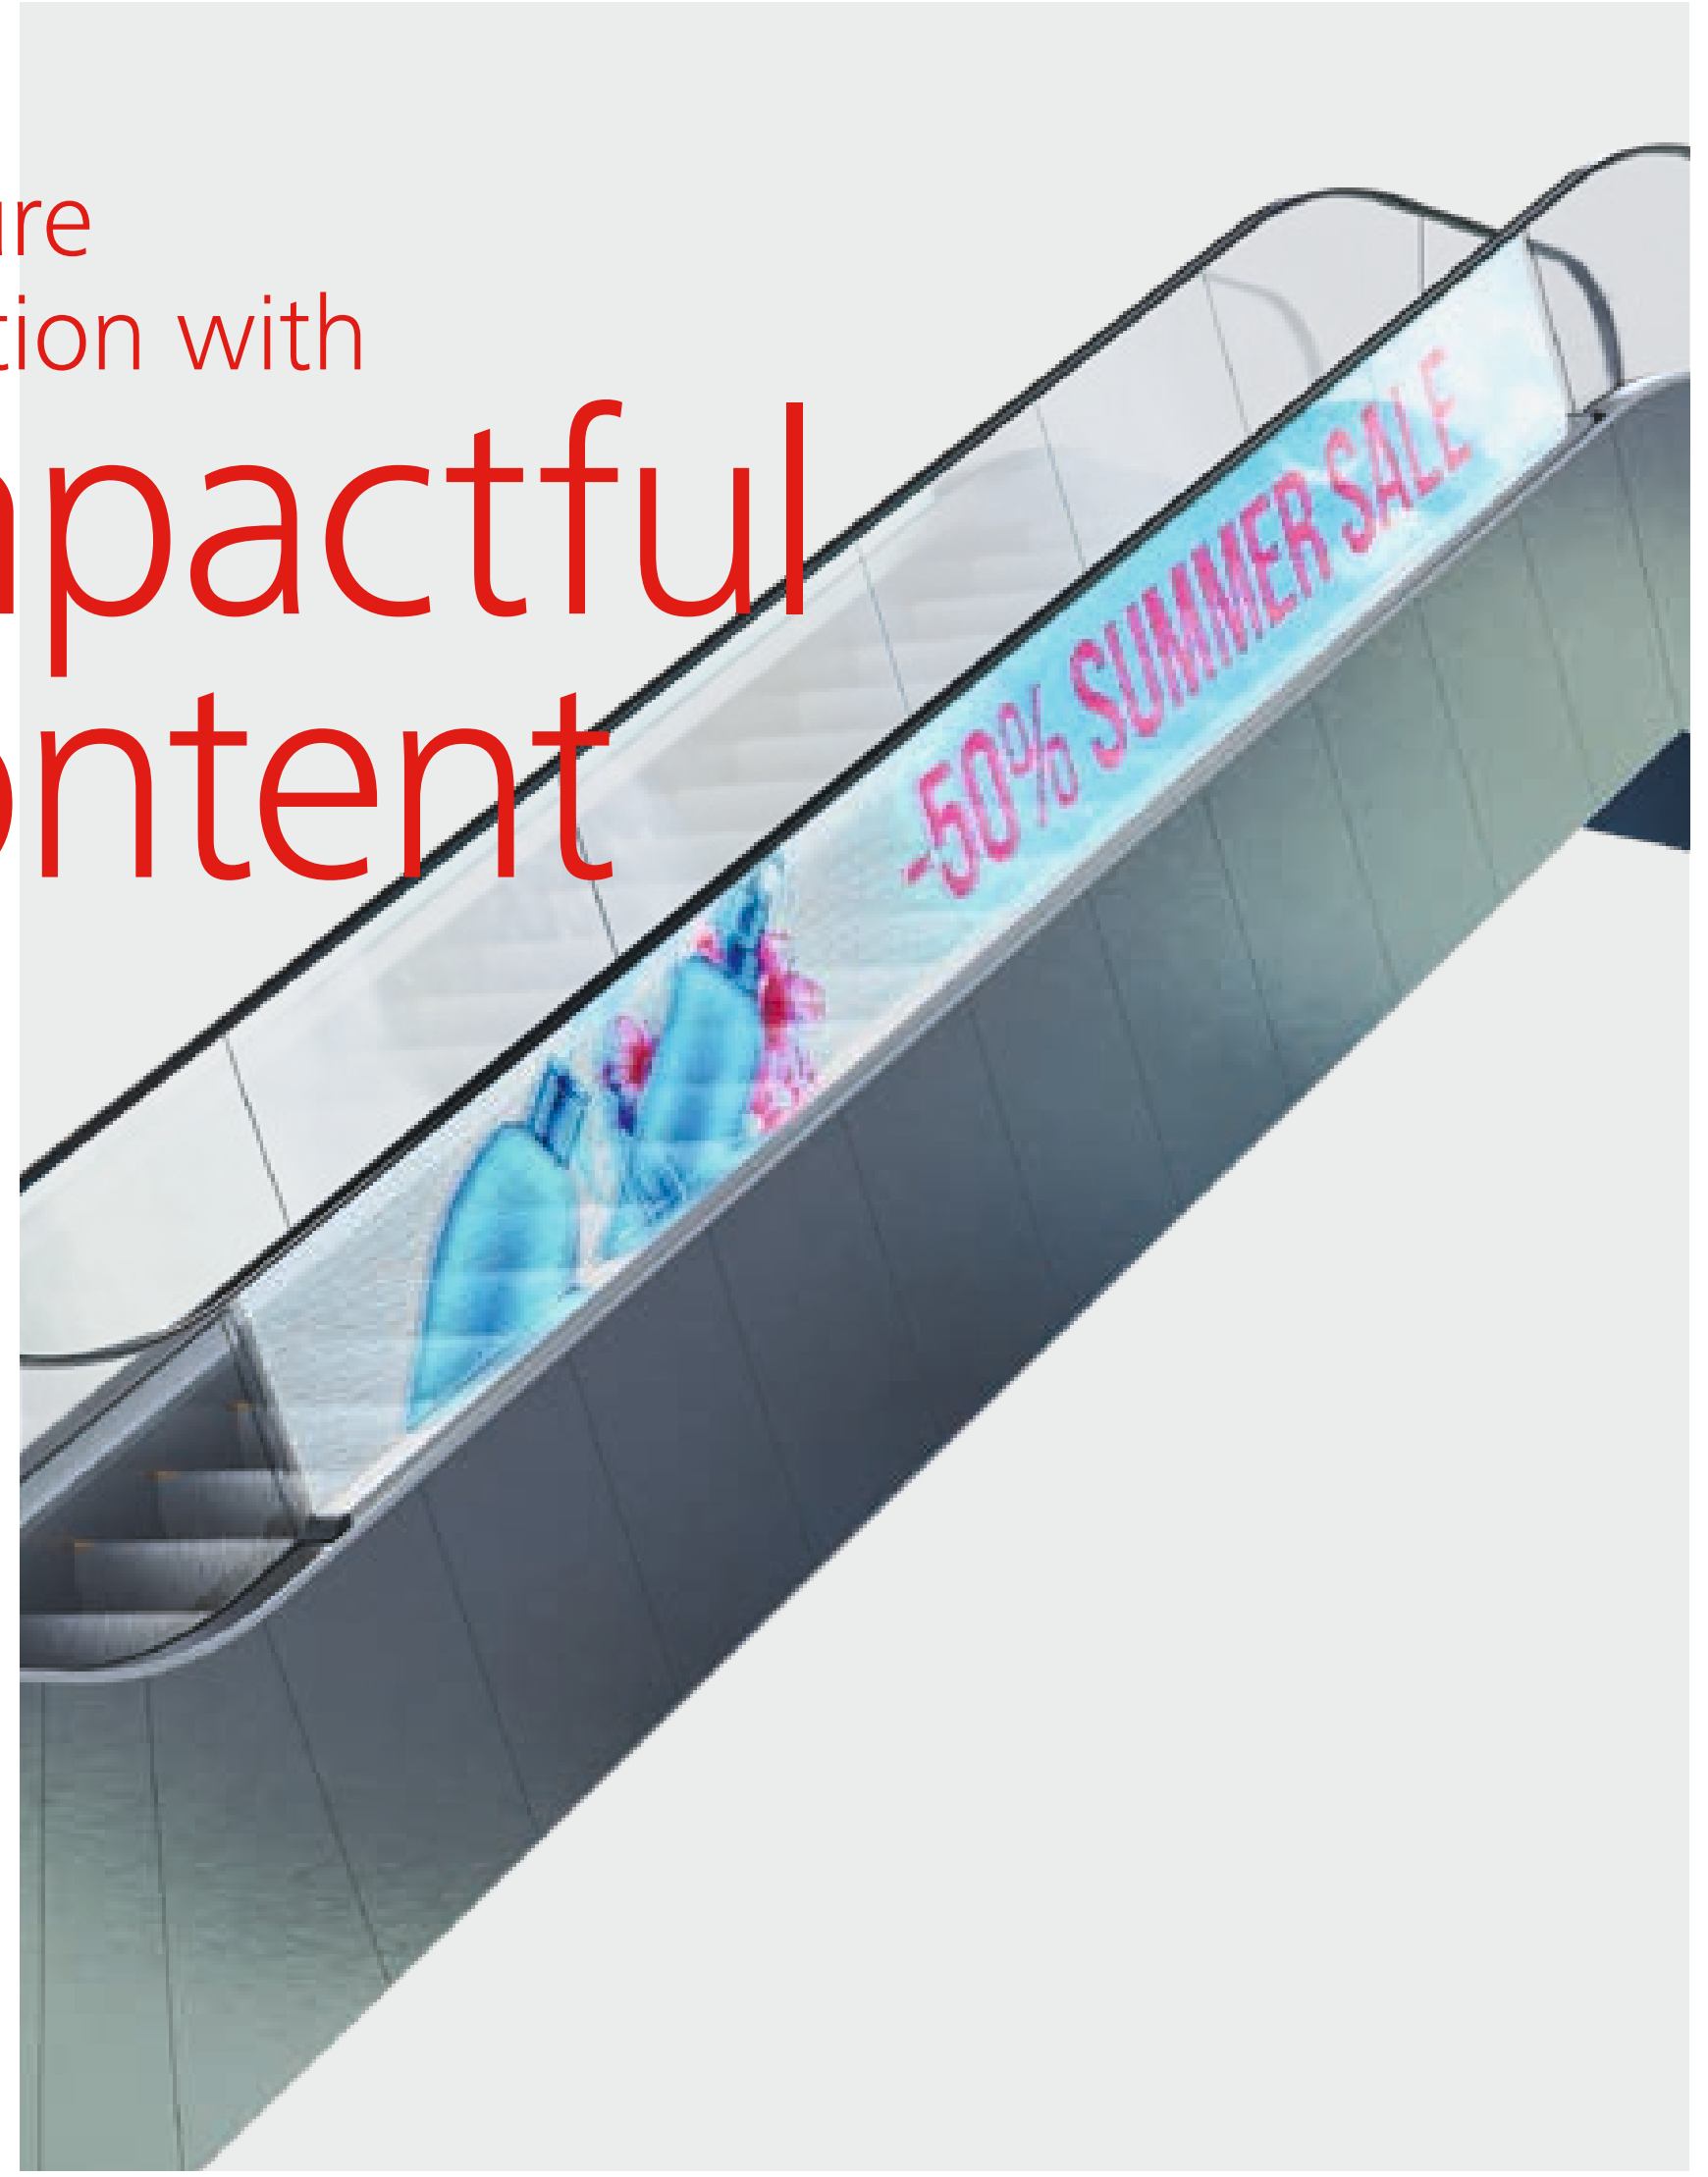

Moving the future

Artisans of innovation

We’re passionate about moving people. Our employees are dedicated to excellence, and every escalator is a testament to our commitment to innovation and quality.

Working with you

Every step of the journey

We believe in building **long-term partnerships with our customers.** Our team of dedicated experts will **work closely with you** at every stage to ensure the best possible **quality.**

High quality-oriented processes

From planning and design through manufacturing and handover to maintenance and modernization, our commitment to quality spans the entire life cycle of our escalators.

Enhanced passenger experience

Our escalators are renowned for their robustness and reliability, providing a smooth and comfortable ride with minimal downtime and minimal vibration.

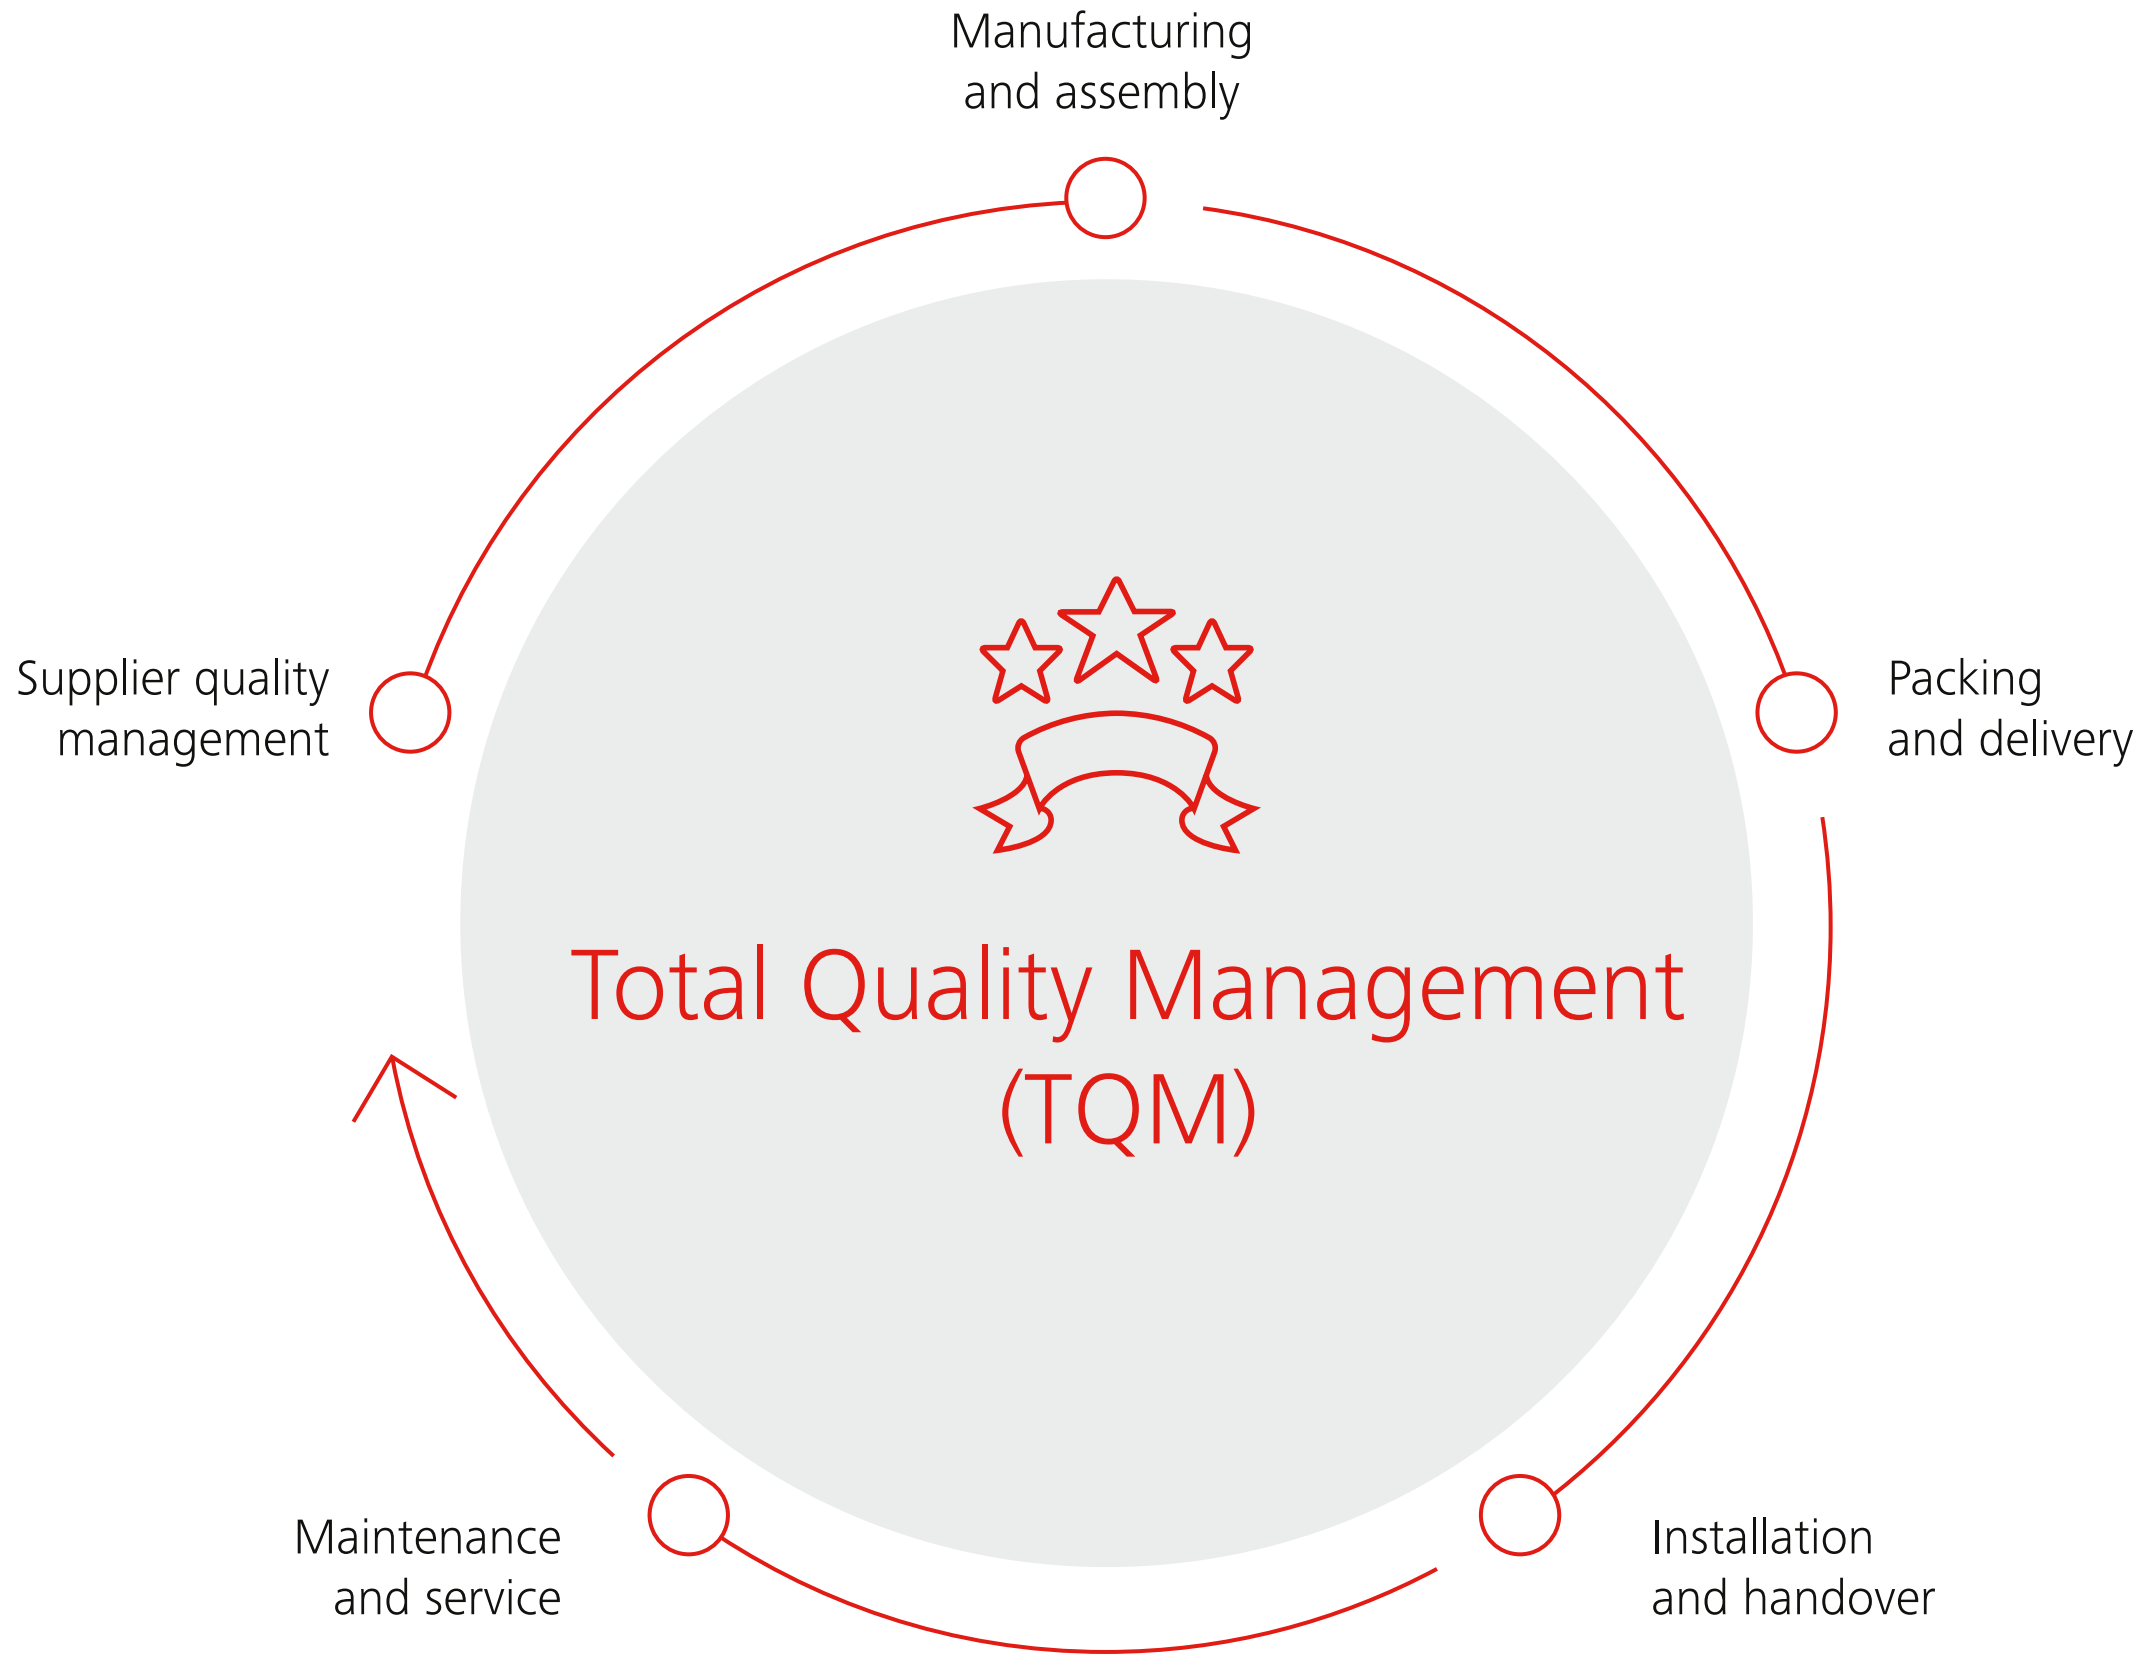

A smooth process

From transportation to installation

We provide **professional project management,** ensuring seamless and safe handling of the equipment – from the moment it leaves production to its final placement on your job site.

A
Transportation to the installation site using special forklift trucks

B
Moving the escalator into the building

C
Hoisting the escalator onto its supports

D
Final installation and commissioning



E
Schindler Acceptance Inspection Standard (SAIS)

F
Handover and connection to Schindler digital services

Planning

Explore your options

Strategic escalator design and placement in commercial buildings ensures business success by facilitating smooth customer movement.

Type 11 30°

Schindler 9300

Maximum vertical rise:
10 m

Balustrade:
design E

Balustrade height:
900 / 1,000 mm

Top/bottom
transition radius:
1.0 / 1.0 m

Step width:
600 / 800 / 1,000 mm

Step run:
3 horizontal steps

All drawing dimensions in mm.
Observe national regulations!
Subject to changes.

For vertical rises below 6,000 mm the horizontal step run can be reduced to 2 horizontal steps. In that case, the distance between supports is reduced by 800 mm.

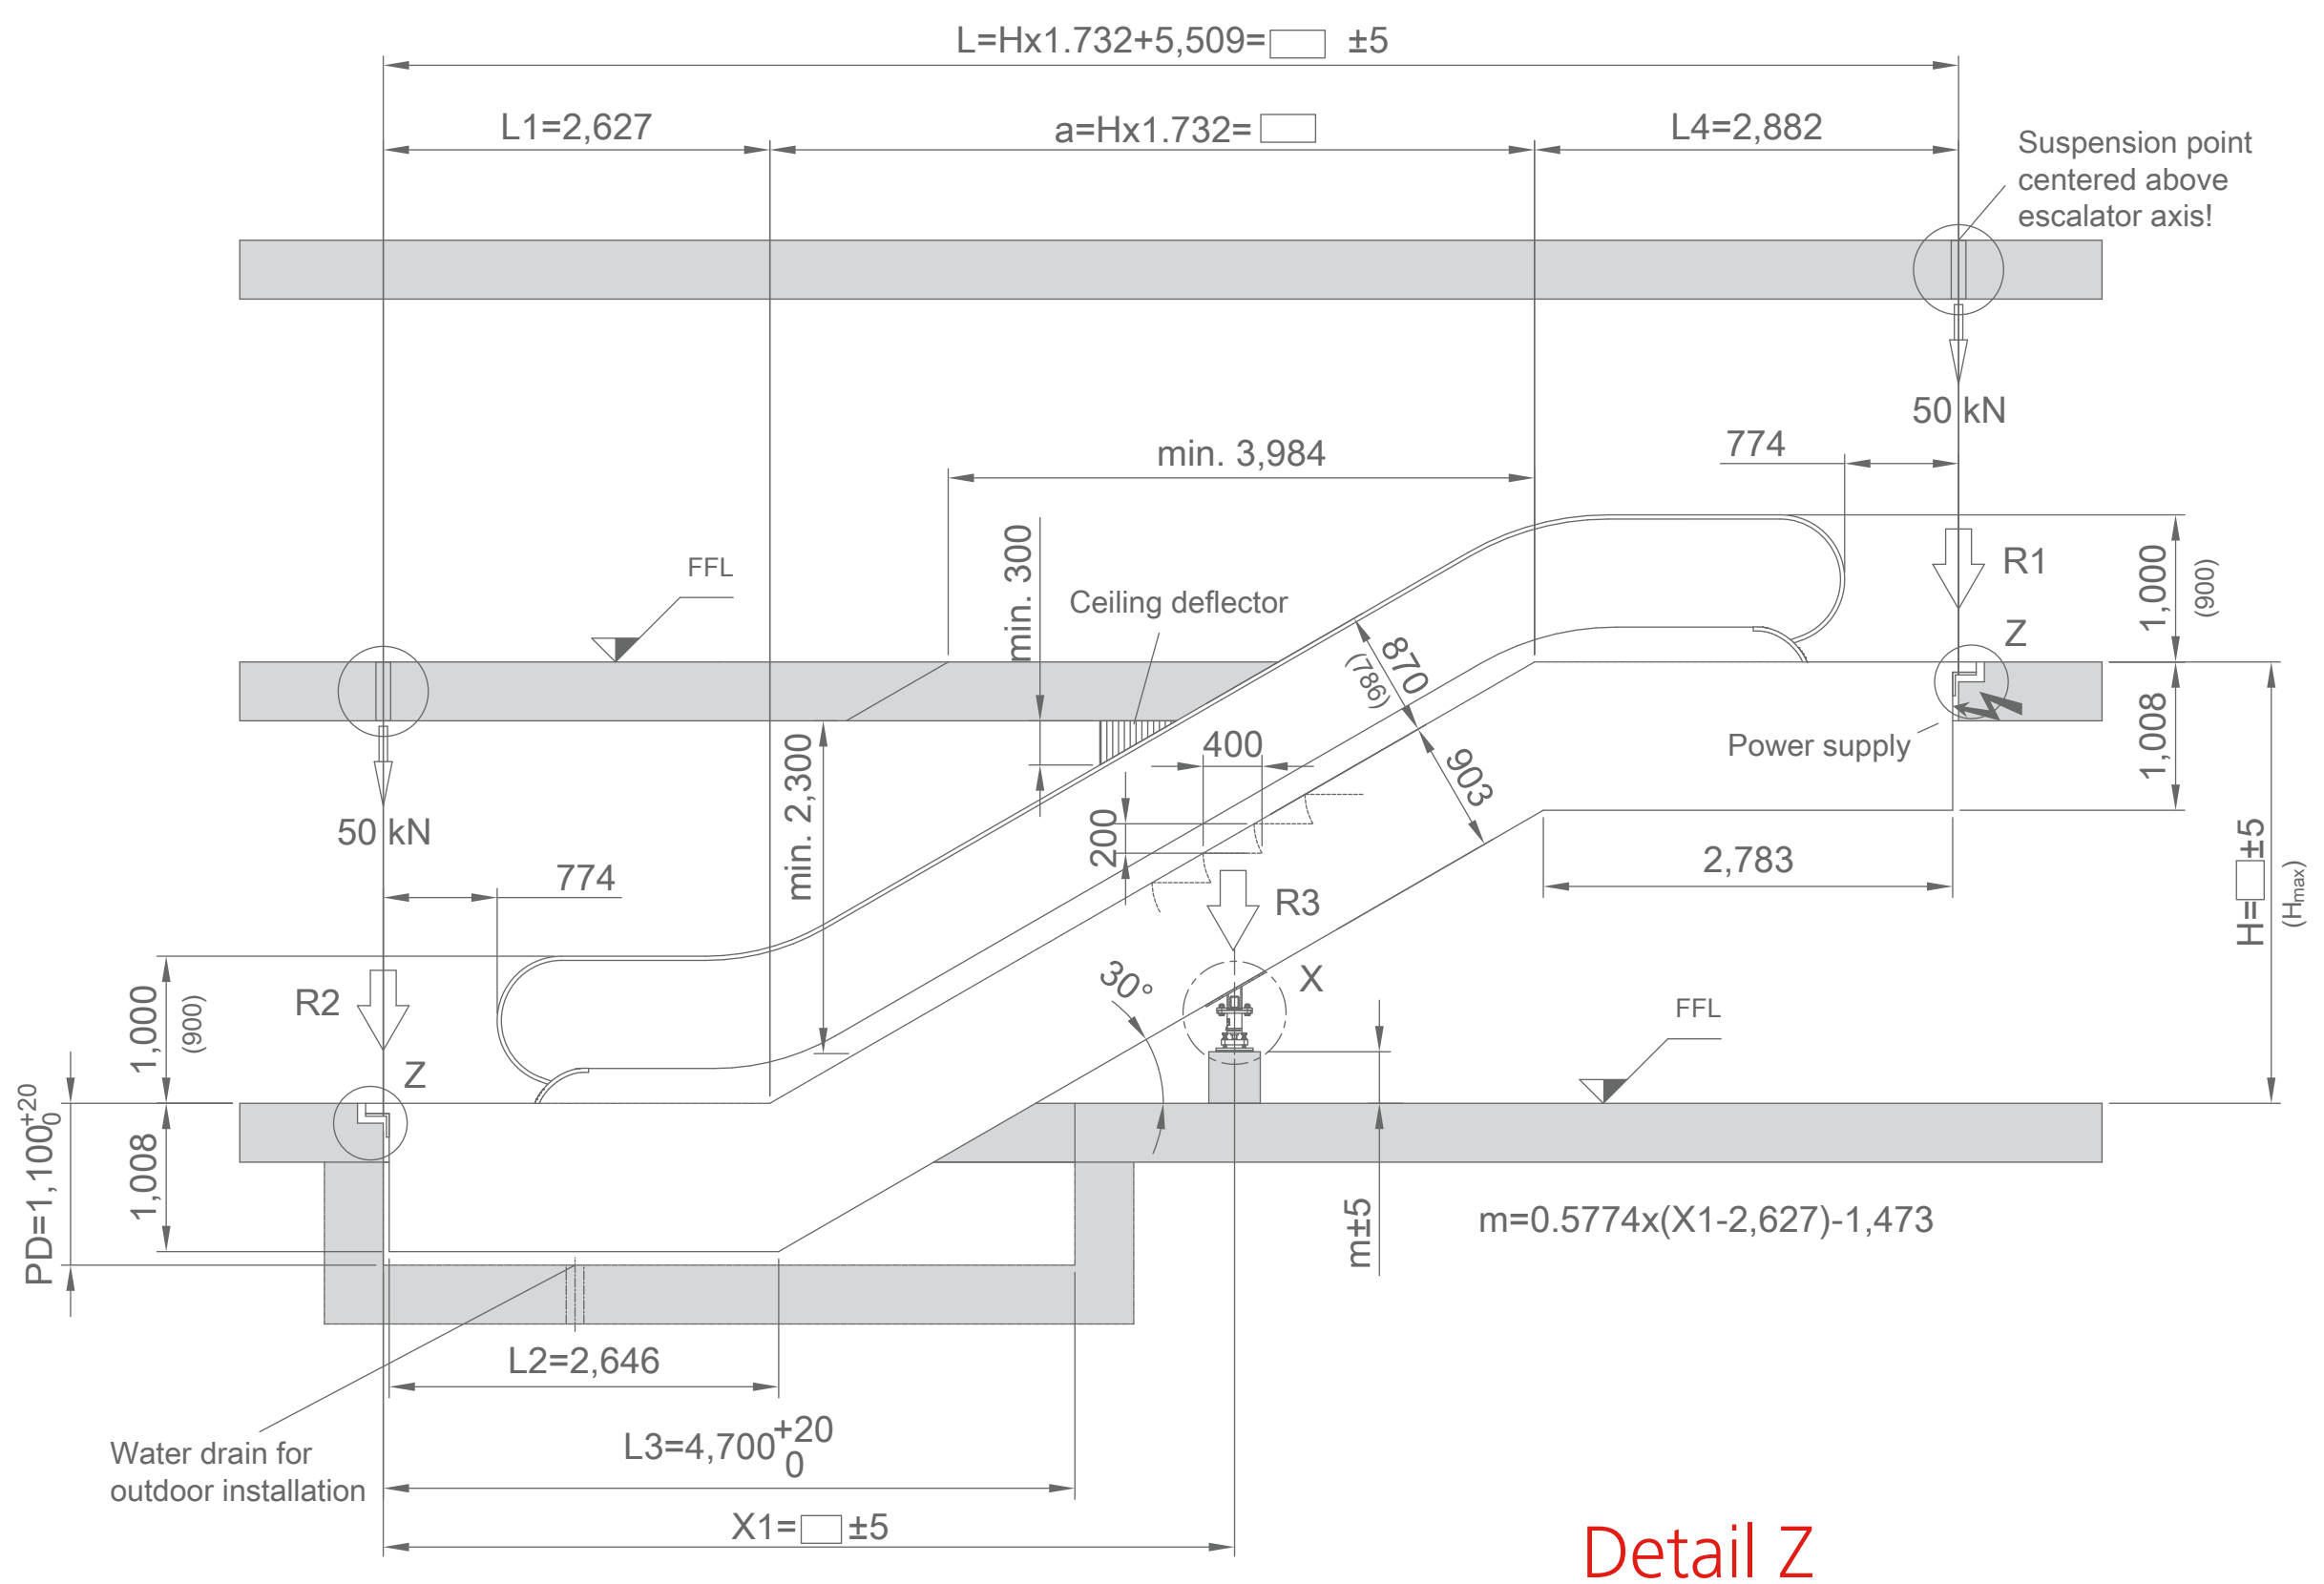

Detail X



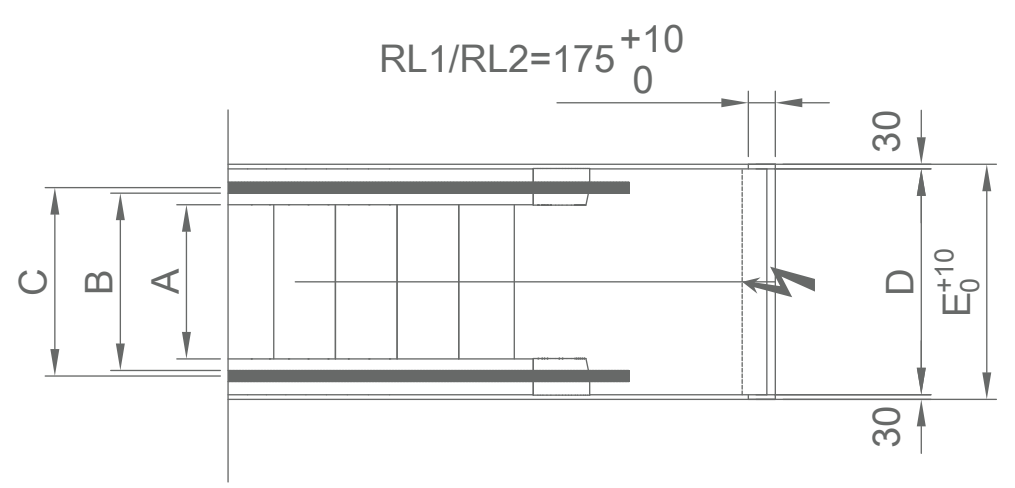

Detail Z

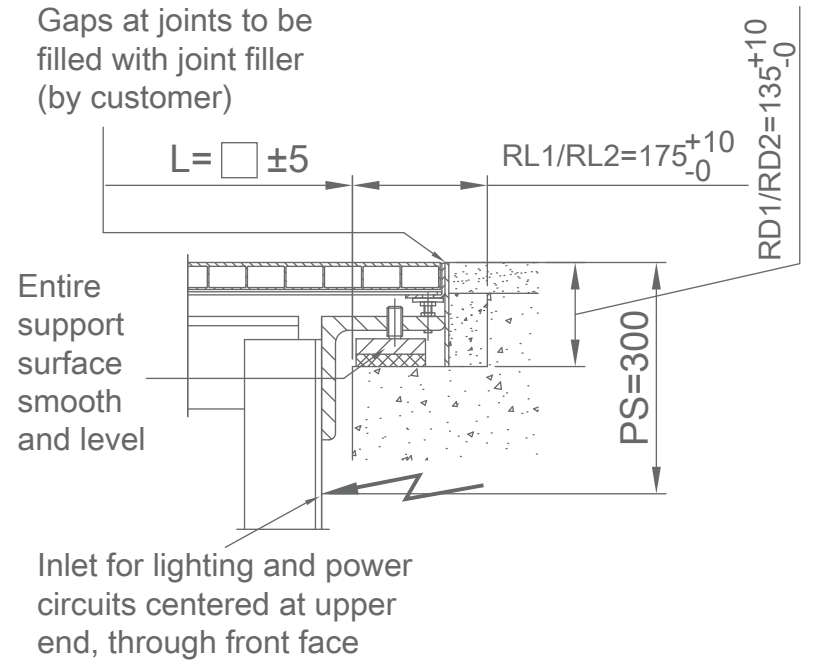

Transport dimensions



For commission specific dimensions and support loads, please consult your Schindler branch.

Step width (mm)	600	800	1,000
A: Step width	600	800	1,000
B: Width between handrails	750	950	1,150
C: Handrail center distance	822	1,022	1,222
D: Width of escalator	1,065	1,265	1,465
E: Width of pit	1,125	1,325	1,525
Hmax: Maximum rise	12,000	10,000	10,000

Step width	Rise	Weight	Support loads			Transp. Dimensions	
A	H		R1	R2	R3	Balustrade height 1,000	
mm	mm	kN	kN	kN	kN	h	l
600	3,000	60	51	43	–	2,910	11,960
	4,000	67	57	49	–	2,990	13,940
	5,000	74	63	55	–	3,050	15,910
	6,000	82	70	62	–	2)	2)
	7,000	89	76	68	–	2)	2)
	8,000	94	42	36	79	2)	2)
	9,000	104	46	38	88	2)	2)
800	3,000	61	55	49	–	2,800	11,570
	4,000	68	62	56	–	2,870	13,550
	5,000	75	69	63	–	2,910	15,530
	6,000	84	77	71	–	2,940	17,510
	7,000	90	44	39	81	2)	2)
	8,000	100	49	41	92	2)	2)
	9,000	107	52	44	101	2)	2)
1,000	3,000	65	62	56	–	2,800	11,570
	4,000	73	70	64	–	2,870	13,550
	5,000	82	79	73	–	2,910	15,530
	6,000	91	88	83	–	2,940	17,510
	7,000	99	52	44	96	2)	2)
	8,000	106	55	47	107	2)	2)
	9,000	114	58	50	119	2)	2)

1) If H > 7 m, an intermediate support may be required.
Please consult Schindler.
2) Delivery in 2 parts.
3) For step width 600 mm, a top extension of 417 mm is needed.
4) Escalator height top may be 1,158 mm such as for double drive, please consult Schindler.

Type 11 35°

Schindler 9300

Maximum vertical rise:
6 m

Balustrade:
design E

Balustrade height:
900 / 1,000 mm

Top/bottom
transition radius:
1.0 / 1.0 m

Step width:
600 / 800 / 1,000 mm

Step run:
2 horizontal steps

All drawing dimensions in mm.
Observe national regulations!
Subject to changes.

The horizontal step run can be increased to 3 horizontal steps. In that case, the distance between supports is increased by 800 mm.

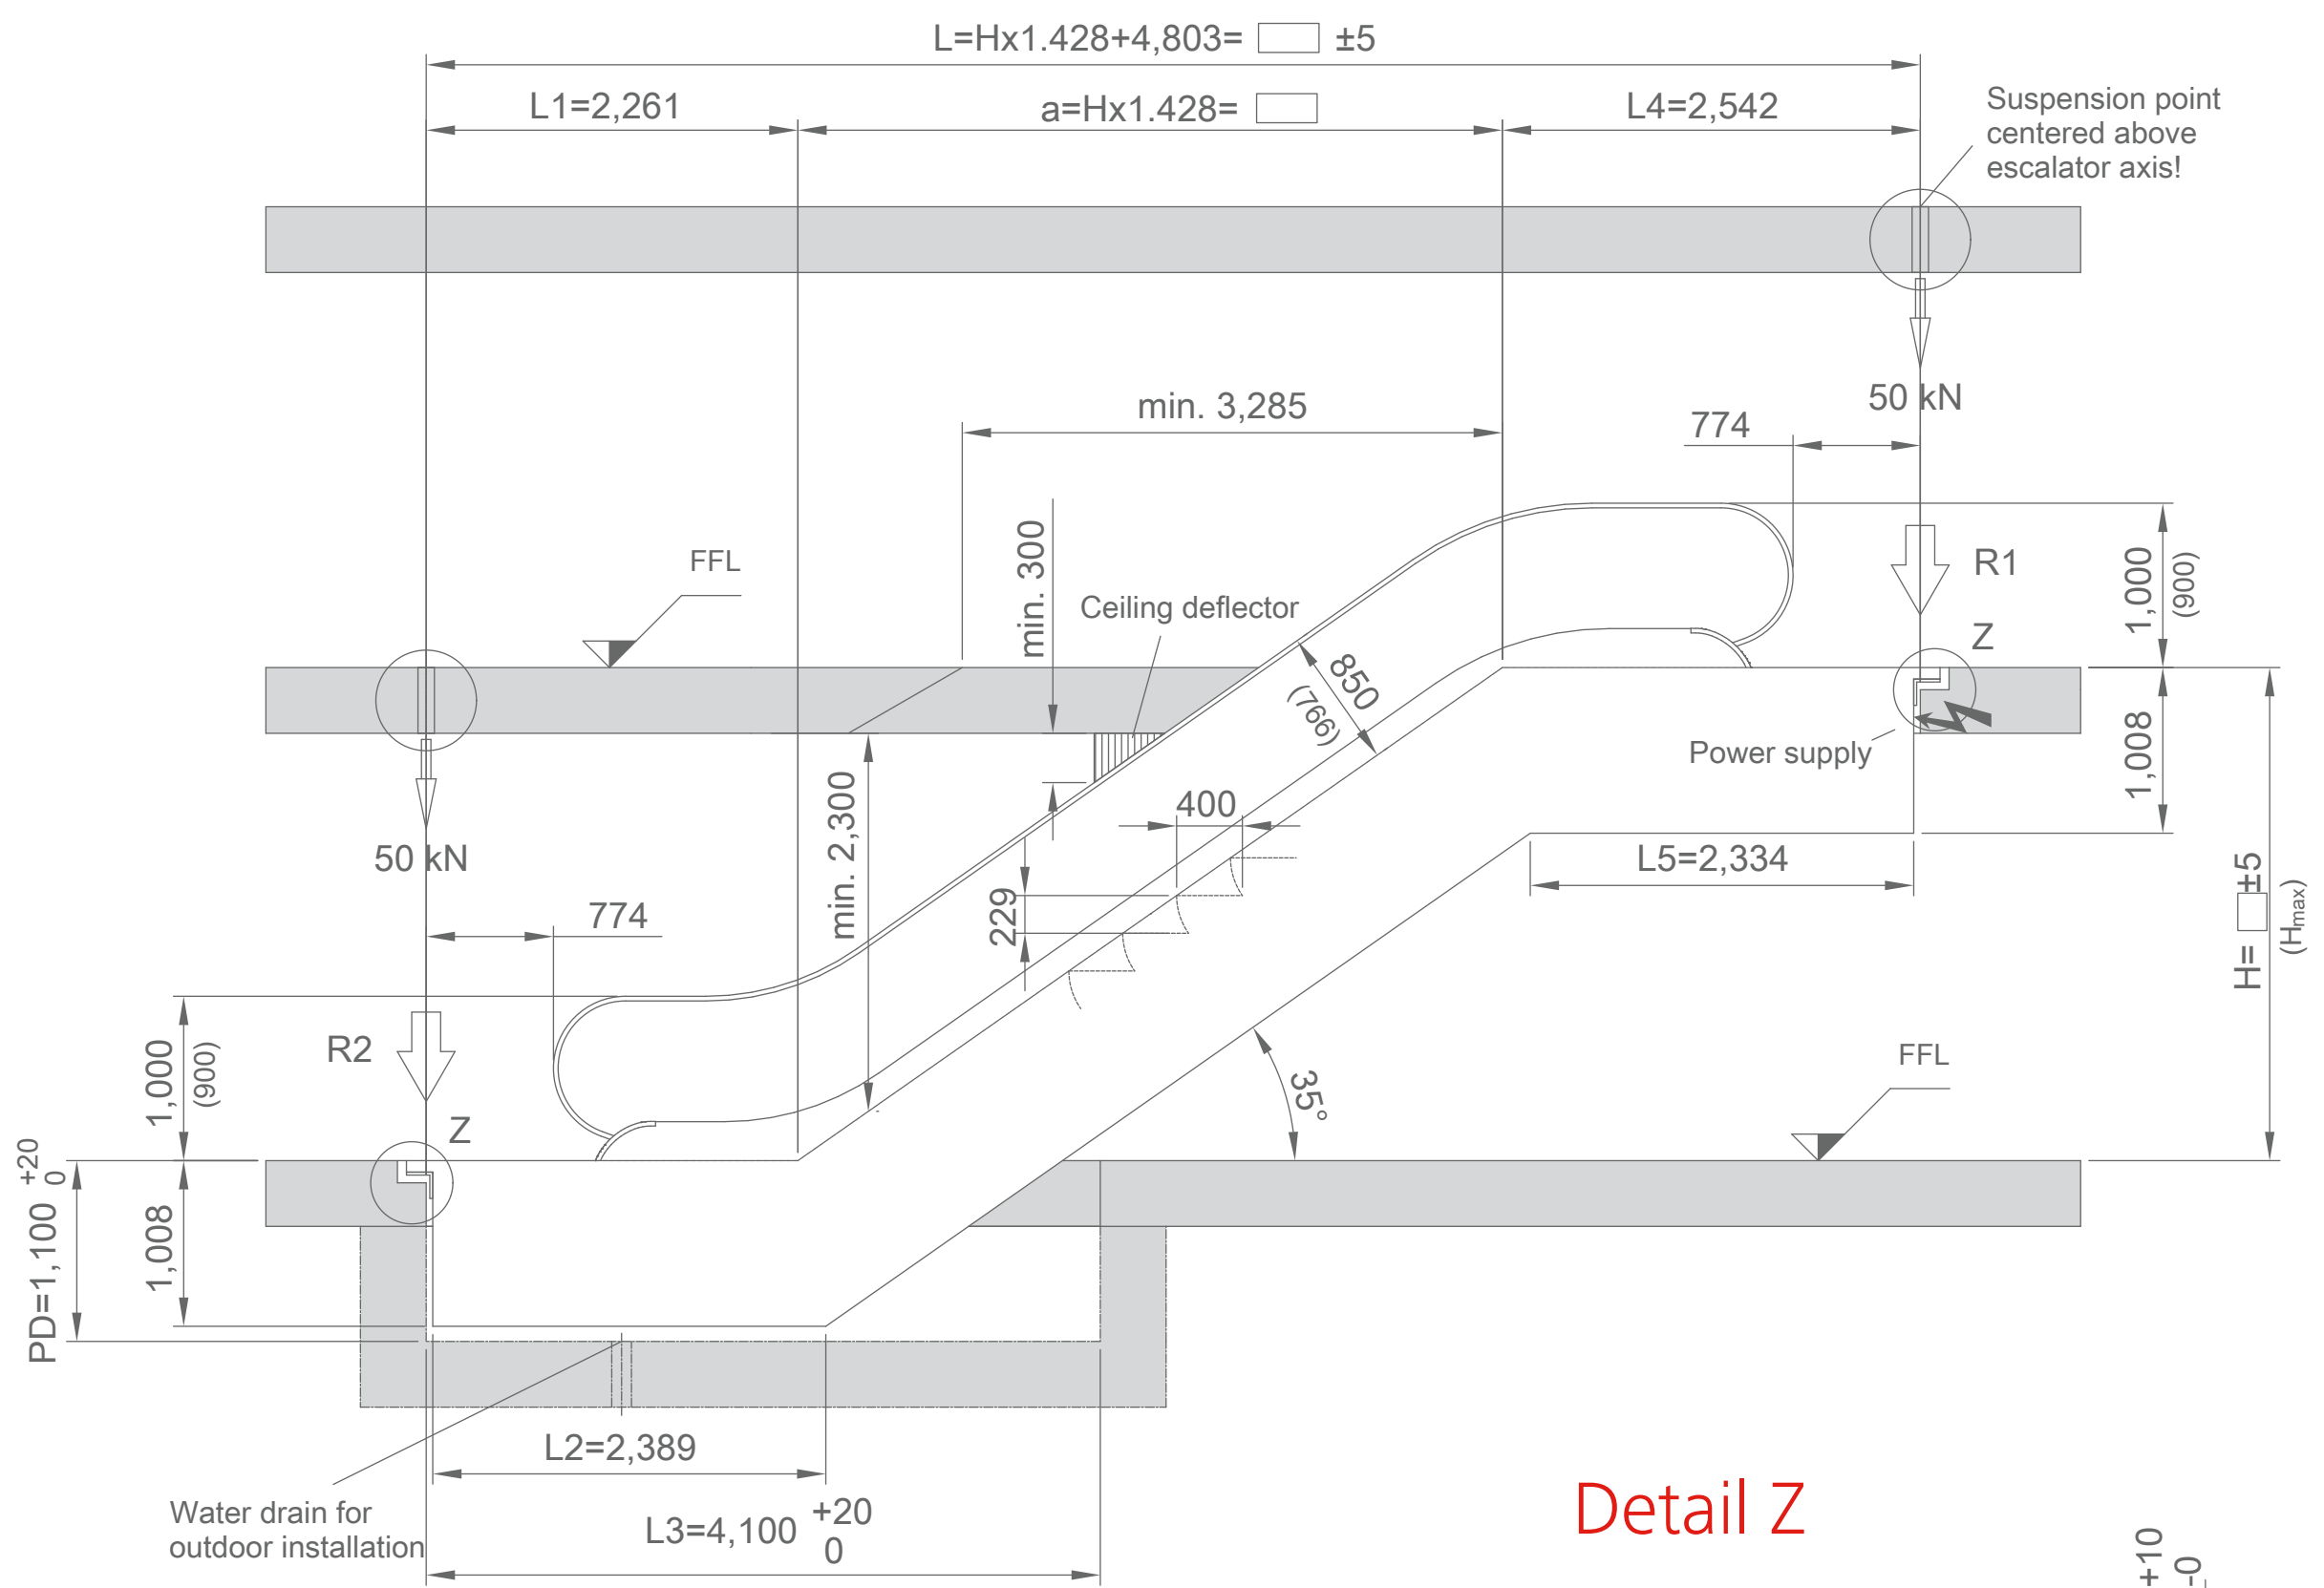

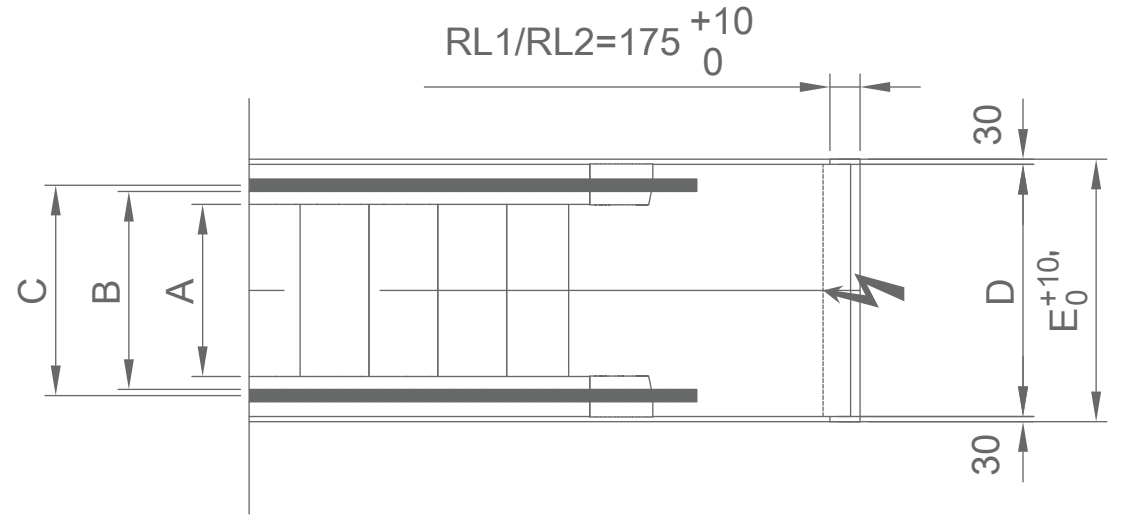

Detail Z

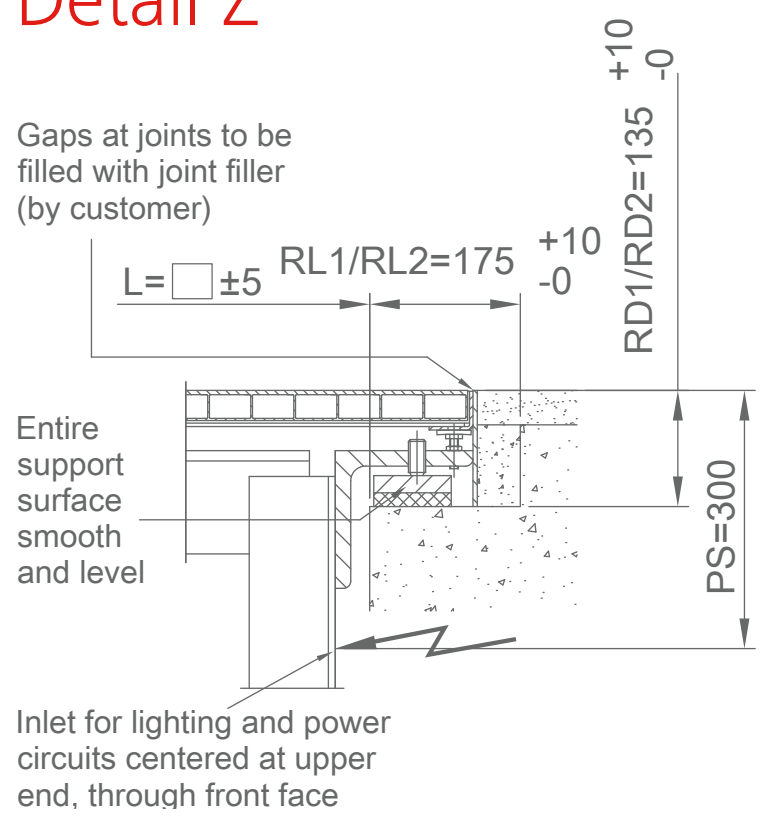

Transport dimensions



For commission specific dimensions and support loads, please consult your Schindler branch.

Step width (mm)	600	800	1,000
A: Step width	600	800	1,000
B: Width between handrails	750	950	1,150
C: Handrail center distance	822	1,022	1,222
D: Width of escalator	1,065	1,265	1,465
E: Width of pit	1,125	1,325	1,525
Hmax: Maximum rise	6,000	6,000	6,000

Step width	Rise	Weight	Support loads		Transp. Dimensions	
A	H		R1	R2	Balustrade height 1,000	
mm	mm	kN	kN	kN	h	l
600	3,000	51	44	36	2,900	10,450
	3,500	54	46	38	2,940	11,310
	4,000	57	49	41	2,980	12,160
	4,500	60	51	43	3,010	13,020
	5,000	63	54	46	3,030	13,880
	5,500	65	56	48	3,050	14,740
	6,000	68	59	51	3,070	15,600
800	3,000	52	47	41	2,780	10,070
	3,500	55	50	44	2,810	10,920
	4,000	58	53	47	2,830	11,780
	4,500	61	56	50	2,850	12,640
	5,000	64	59	53	2,870	13,500
	5,500	67	62	56	2,890	14,360
	6,000	70	65	59	2,900	15,230
1,000	3,000	55	53	47	2,780	10,070
	3,500	58	57	51	2,810	10,920
	4,000	61	60	54	2,830	11,780
	4,500	65	63	57	2,850	12,640
	5,000	68	67	61	2,870	13,500
	5,500	71	70	64	2,890	14,360
	6,000	74	74	68	2,900	15,230

For step width 600 mm, a top extension of 417 mm is needed.

Type 15 30°

Schindler 9300

Maximum vertical rise:
13.5 m

Balustrade:
design E

Balustrade height:
900 / 1,000 mm

Top/bottom
transition radius:
1.5 / 1.0 m

Step width:
600 / 800 / 1,000 mm

Step run:
3 horizontal steps

All drawing dimensions in mm. Observe national regulations! Subject to changes.

For vertical rises below 6,000 mm the horizontal step run can be reduced to 2 horizontal steps. In that case, the distance between supports is reduced by 800 mm.

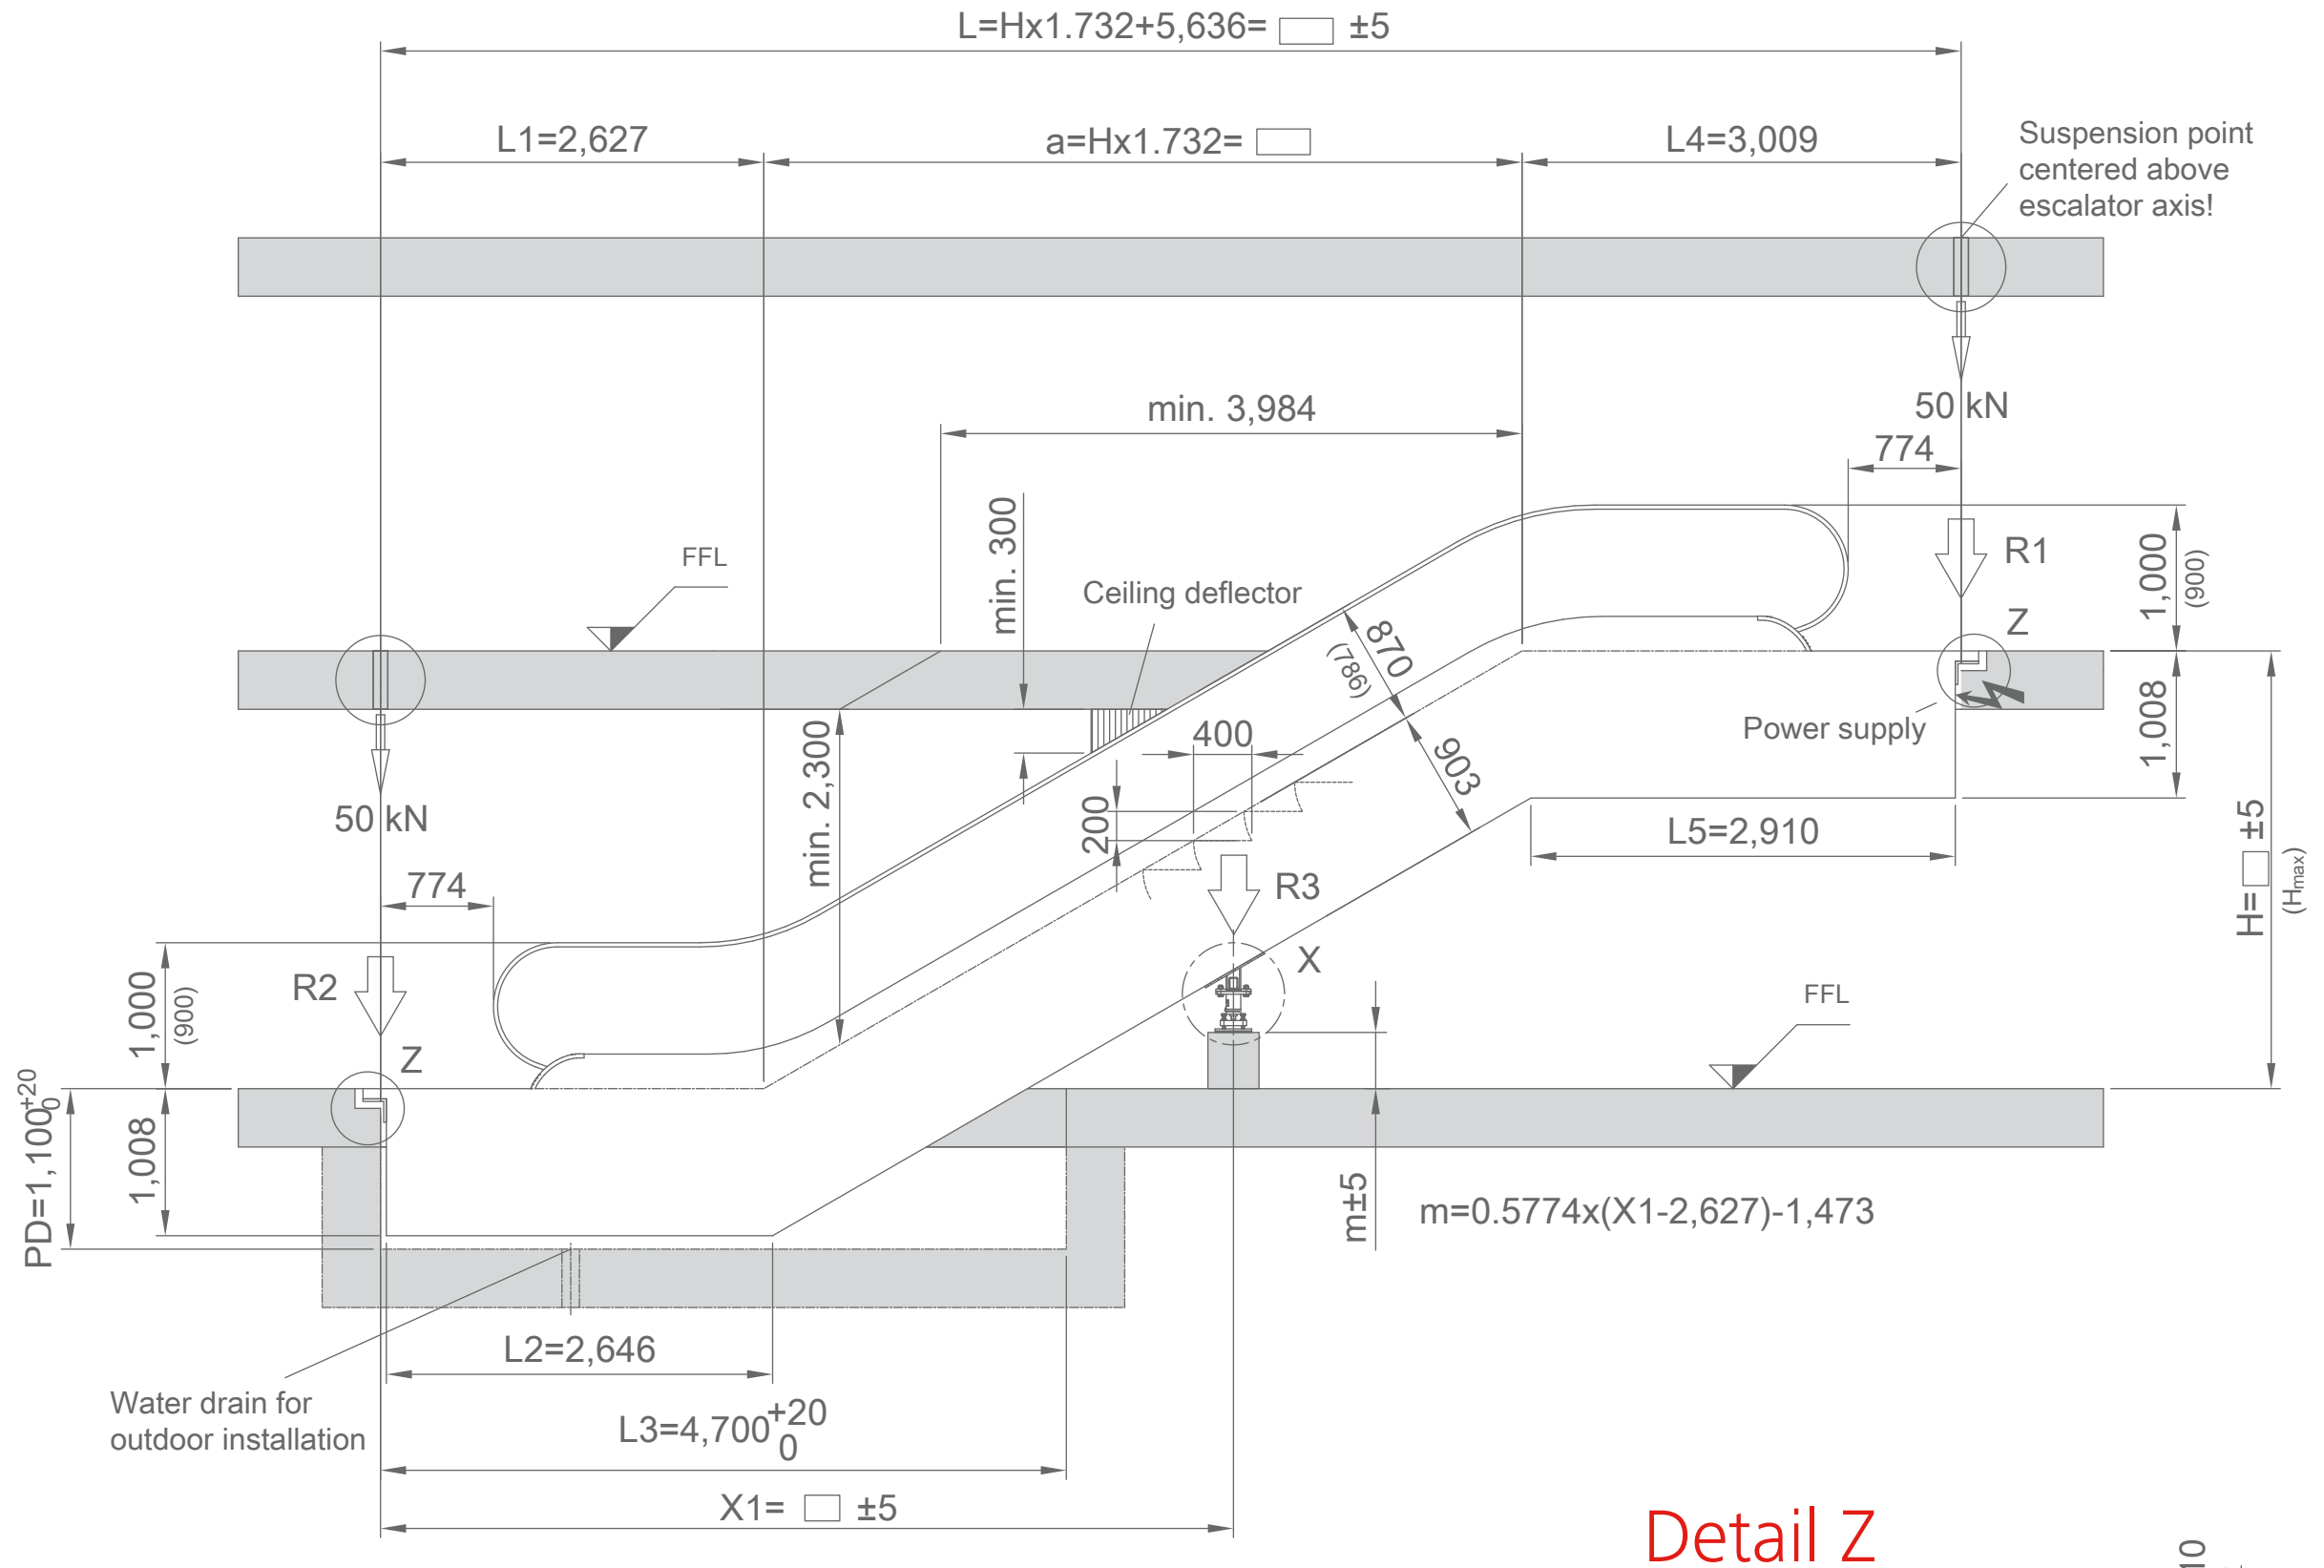

Detail X



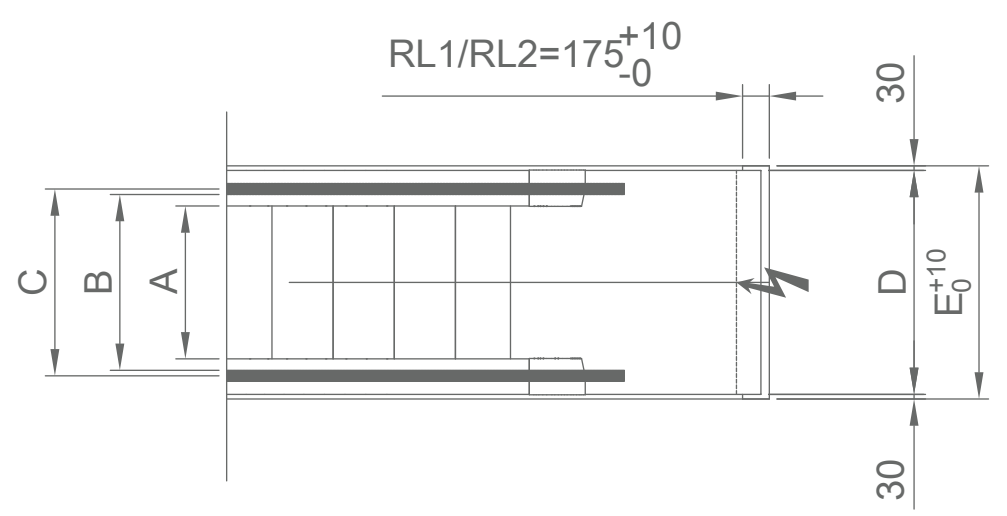

Detail Z

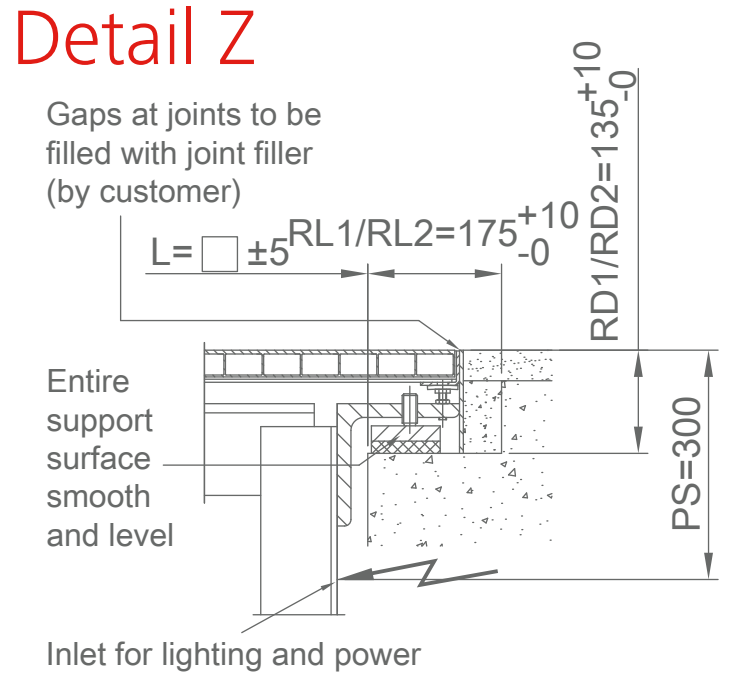

Transport dimensions



For commission specific dimensions and support loads, please consult your Schindler branch.

Step width (mm)	**600**	**800**	**1,000**
A: Step width	600	800	1,000
B: Width between handrails	750	950	1,150
C: Handrail center distance	822	1,022	1,222
D: Width of escalator	1,065	1,265	1,465
E: Width of pit	1,125	1,325	1,525
Hmax: Maximum rise	12,000	15,000	13,500

Step width	**Rise**	**Weight**	**Support loads**			**Transp. Dimensions**	
A	**H**		**R1**	**R2**	**R3**	**Balustrade height 1,000**	
mm	**mm**	**kN**	**kN**	**kN**	**kN**	**h**	**l**
	3,000	62	56	49	–	2,840	11,690
	4,000	69	63	56	–	2,910	13,670
	5,000	76	70	63	–	2,950	15,650
	6,000	85	78	71	–	2,990	17,630
	7,000	91	45	39	82	3)	3)
800	8,000	101	49	41	92	3)	3)
	9,000	108	52	44	102	3)	3)
	10,000	115	54	46	112	3)	3)
	11,000	130	62	49	125	3)	3)
	12,000	137	65	52	135	3)	3)
	13,000	148	69	56	144	3)	3)
	3,000	66	63	57	–	2,840	11,690
	4,000	73	71	65	–	2,910	13,670
	5,000	82	80	74	–	2,950	15,650
	6,000	92	90	83	–	2,990	17,630
	7,000	99	52	44	97	3)	3)
1,000	8,000	107	55	47	108	3)	3)
	9,000	115	58	50	120	3)	3)
	10,000	122	61	53	131	3)	3)
	11,000	141	71	58	145	3)	3)
	12,000	149	74	61	156	3)	3)
	13,000	160	79	66	167	3)	3)

1) For H > 7 m, an intermediate support may be required. Please consult Schindler.
2) For H > 10 m, a top extension of 417 mm is needed.
3) Delivery in 2 parts.
4) Escalator height top may be 1,158 mm such as for double drive, please consult Schindler.

Planning tools

3D models of escalators

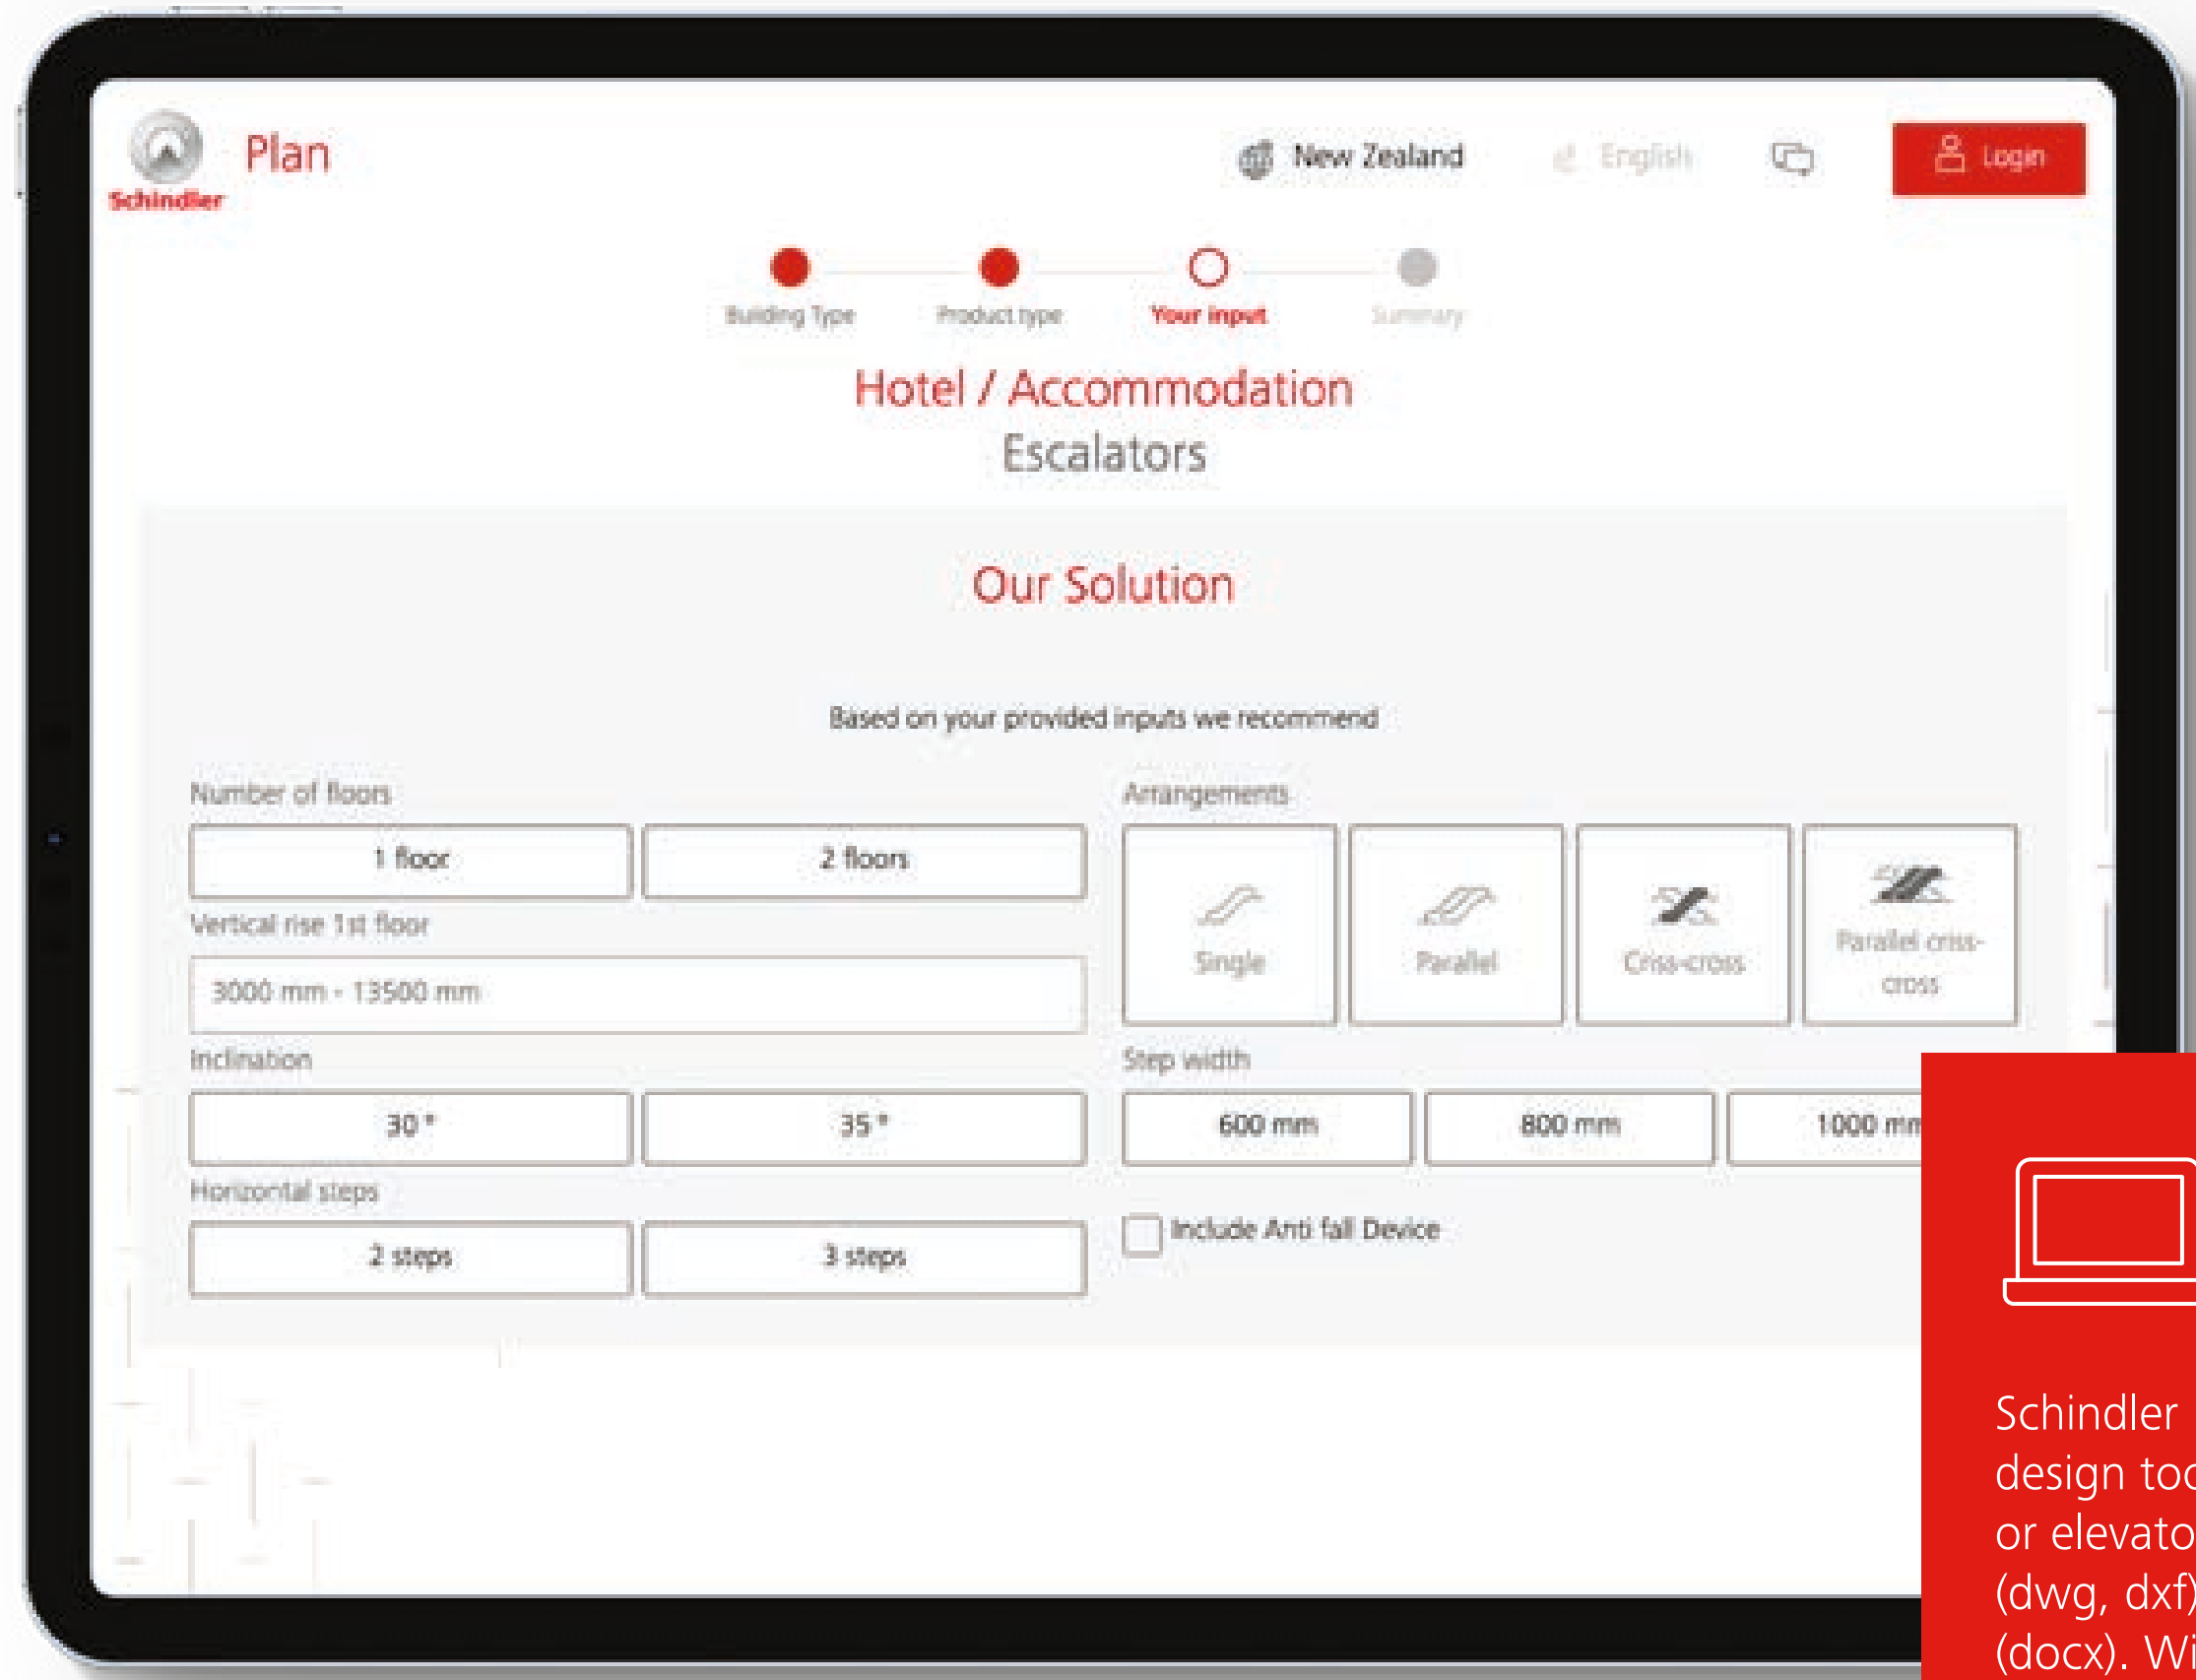

Schindler Plan & Design

Include BIM models within Autodesk Revit

DigiPara Elevatorarchitect is a free plug-in to create 3D BIM models of elevators and escalators within Autodesk Revit. By downloading and installing it from the Autodesk App store, you can import Schindler escalators and moving walks into your Revit building.

Plan and design your escalators

Schindler Plan & Design is our online planning and design tool. You can download your specific escalator or elevator planning data in the form of CAD drawings (dwg, dxf), BIM models (ifc) or written specifications (docx). With just a few clicks, you can get a product specification and a detailed layout drawing.

Schindler 9300
Commercial application

MAN.9300.EN.08.25

We Elevate

Schindler