

INSTITUTE NETWORK MANAGEMENT SYSTEM

PROJECT NAME : Institute Network Management System

DESCRIPTION : The Main Object Of This Project Is To Campus An **Institute Network Management System** Create, As A Result, Every Employer, Students Can Connect With Each Other Easily, There Will Be A **Server Room, It-lab, Teacher Room** That Easy To Connect, And Moreover Each Main Server Will Be Connected To The Room. It Allows Them To Communicate With Each Other And Maintain Connectivity.

PROJECT MEMBER

- i. Kamrul Hossain
- ii. Mahafuzur Rahman



ENGR. MD. SHAHADAT HOSSAIN
Chief Executive Officer
CSLiT
H # 8, R # 1/B, S # 9, Uttara. Dhaka-1230

Abbreviations

MSE	Mobility Service Engine
UCS	Unified Computing System
RFP	Request for Proposal
IP	Internet Protocol
RIP	Routing Information Protocol
RPP	Routing Protocol Plan
OS	Operating System
OSI	Open Systems Interconnection
FTP	File Transfer Protocol
DNS	Domain Name System
LAN	Local Area Network
VLAN	Virtual Local Area Network

List of Figures

1. VLAN Configurations	2
2. Existing Infrastructure	3
3. Proposed Network	4
4. RPP Router 0	9
5. RPP Router 1	9
6. RPP Router 2	9
7. Prototype Of Proposed Network	10
8. Testing VLAN From HOD Cabin	10
9. Testing Web Hosting	11
10. Testing FTP Server	11

Contents

1: Introduction	1
2: Objectives	1
3: Network Requirements	1
4: Major Design Areas and Functional Areas	2
5: Existing Infrastructure	3
6; Network Devices	4
7: Request for Proposal (RFP)	6
8: IP addressing Plan	7
9: Routing Protocol Plan	9
10: Network Design	10
11: Summary	12
12: References	12

Introduction

This College Network Scenario is about designing a topology of a network that is a LAN (Local Area Network) for a College in which various computers of different departments are set up so that they can interact and communicate with each other by interchanging data. To design a networking scenario for a college which connect various departments to each other's, it puts forward communication among different departments. CNS is used to design a systematic and well-planned topology, satisfying all the necessities of the college (i.e. client). CNS come up with a network with good performance.

Objectives

The main objective of the proposed network is to update the existing network and also enhance its capabilities and increase the flexibility of the network which will eventually provide good security.


Network Requirements

- 1: The new system should be able to reduce internet downtime. Download and upload links should be maintained above 5 Mbps speed requirement.
- 2: Network will be scalable.
- 3: The system should support remote access.
- 4: Should comprise of data centers with necessary security features and support

Major Design Areas and Functional Areas

The new system planned comprises of IP based switches that remain as the access point to lan-based (ethernet) as well as Wi-Fi-based connectivity. These switches provide SNMP support as well so that traffic monitoring becomes easy. Ip based switches are used mainly because:

- The inter VLAN routing feature is supported on both IP base or SMI and IP services or EMI image Layer 3 switches. For Layer 2-only switches, you require a Layer 3 routing device with any of the previous images.

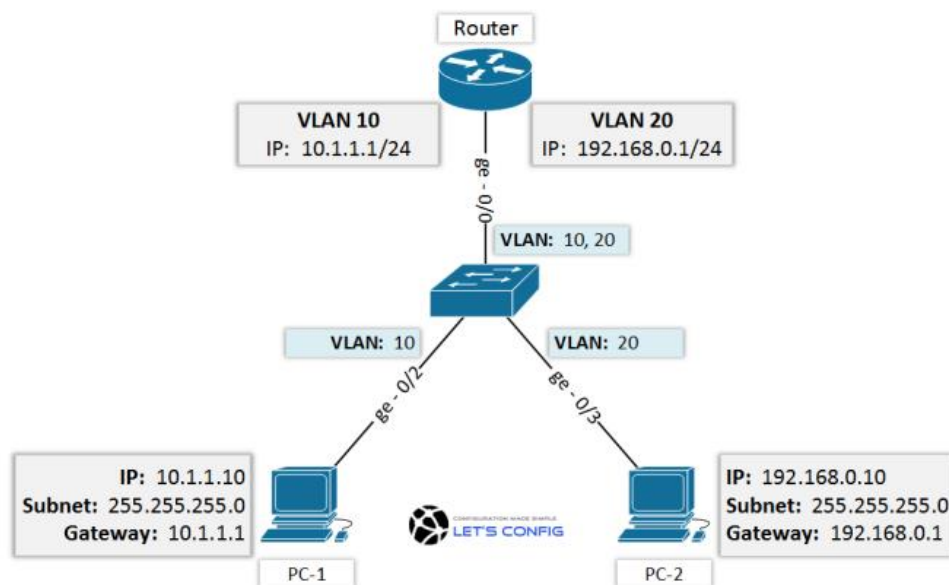

VLAN Config


- The IP Base feature set includes advanced quality of service (QoS), rate limiting, access control lists (ACLs), and basic static and Routing Information Protocol (RIP) functions. Dynamic IP routing protocols (Open Shortest Path First (OSPF), BGPv4, Enhanced Interior Gateway Routing Protocol (EIGRP)) are available only on the IP services image.
- The IP Services image provides a richer set of enterprise-class features, which includes advanced hardware-based IP unicast and IP Multicast routing. Support for IPv6 Layer 3 switching in hardware is also available with the addition of the Advanced IP Services license to either the IP Base or the IP Services images. Both the IP base Image and the IP services image allow for Layer 3 and Layer 4 lookups for QoS and security.

Existing Infrastructure

The existing system is a very basic system. College mainly comprises of three main sections as

1. TPO & Other
2. Exam Center
3. Office

All the hosts are assigned with static IPs and are assigned in the order in which it where set up. No support for dynamic IP allocations. Even though the working is divided into three major sectors all the host, multimedia devices are connected in a single network. Thus, network security and maintenance are difficult. One more problem observed was the existing switches were outdated and hence could not prove to be beneficial for the network administrator to observe monitor and handle the network traffic the system has no remote access to the network. Absence of basic small-scale businesses firewall was also observed. Thus, security is also compromised. Three server rooms were used for the purpose of independent networking which further caused wastage of power and money.

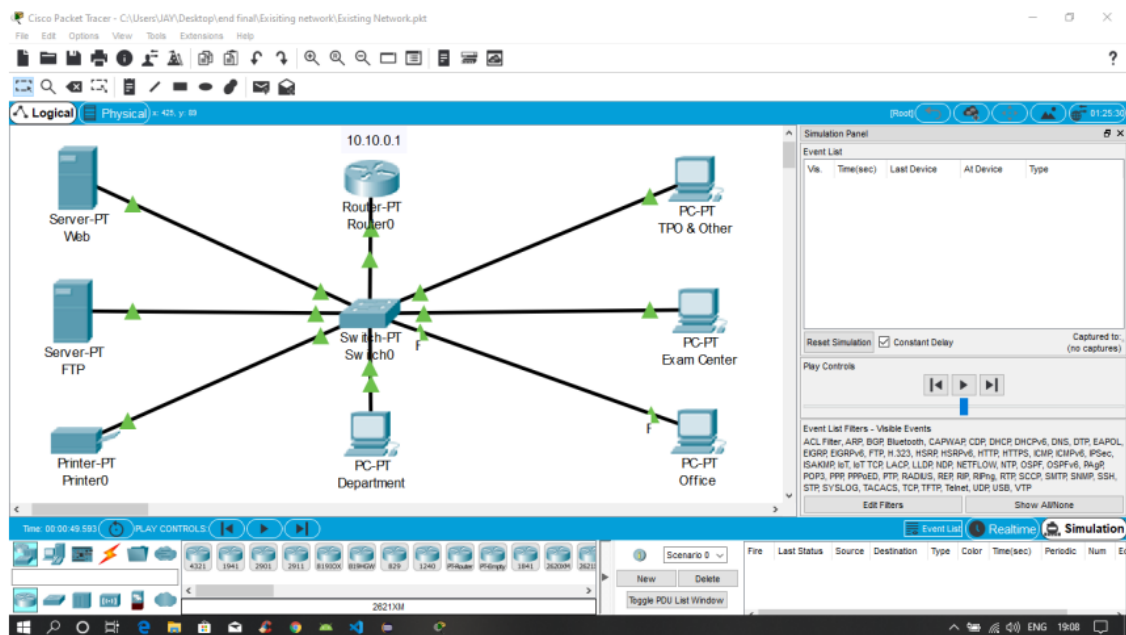

The above design is the existing network traced on cisco packet tracer.


Network Devices

Developing the existing Lan system:

- The basis of the LAN core is Cisco Catalyst 6509 switches equipped with Cisco 720 supervisors and Virtual Switching System (VSS), as well as Cisco 4500 switches, combined in a stack with the data transmission ports at 10 Gb/s bandwidth capacity. Switches create a platform for additional services, such as content processing, firewall (the project uses the Cisco firewall), intrusion prevention system, application of IPsec security tools, the arrangement of protected VPN channels, network analysis and acceleration of Secure Sockets Layer (SSL) connections.

Mobility Services Engine (MSE) solution and 300 Cisco Aironet 1140 access points were used.

- The Cisco Aironet 1140 Series is a component of the Cisco Unified Wireless Network, which can scale up to 18,000 access points with full Layer 3 mobility across central or remote locations on the enterprise campus, in branch offices, and at remote sites.
- The Cisco Unified Wireless Network is the industry's most flexible, resilient, and scalable architecture, delivering secure access to mobility services and applications and offering the lowest total cost of ownership and investment protection by integrating seamlessly with the existing wired network.

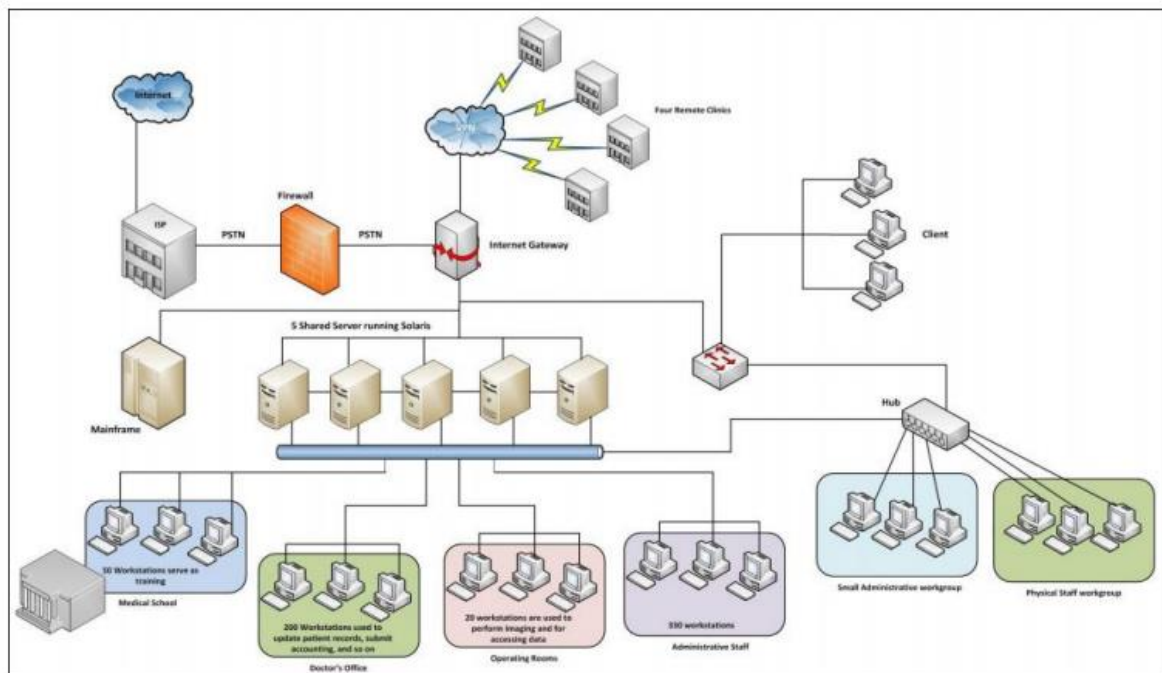

Above is the pictorial representation of the proposed network

Cisco Unified Computing System (UCS) solution allowed the integration of computer and network resources as well as storage and virtualization systems as part of an energy efficiency system. Cisco Unified Computing System platform notably simplifies traditional architecture and significantly reduces the number of devices to be purchased, to connect by wires, to supply with electricity and cooling, to protect and maintain. This solution is the foundation of complex optimization of the virtualized medium while maintaining the ability to support traditional operating systems and applications stacks in physical medium. This overall infrastructure developed allowed integration of several functionally different physical networks into one, such as guest network, hotel management network, telephone network and IP-Television network. The convergence within single network reduced hotel expenses for constructing and managing several dedicated networks which traditionally remain separate in hotels. The term unified computing system is often associated with Cisco. Cisco UCS products have the ability to support traditional operating system (OS) and application stacks in physical environments, but are optimized for virtualized environments. Everything is managed through Cisco UCS Manager, a software application that allows administrators to provision the server, storage and network resources all at once from a single pane of glass. Similar offerings to Cisco UCS include HP BladeSystem Matrix, Liquid Computing's Liquid, Sun Modular Datacenter and Intel iCloud 360.

IP Addressing Plan

IT DEPARTMENT (192.168.1.0)	
HOD CABIN	192.168.1.2
IT LAB 1	192.168.1.3
IT LAB 2	192.168.1.4
IT LAB 3	192.168.1.5
IT LAB 4	192.168.1.6
Printer 0	192.168.1.7

COMPUTER DEPARTMENT (192.168.2.0)	
CS HOD CABIN	192.168.2.2
CS LAB 2	192.168.2.3
CS LAB 2	192.168.2.4
CS LAB 3	192.168.2.5
CS LAB 4	192.168.2.6
Printer 7	192.168.2.7

OTHERS (192.168.3.0)	
OFFICE	192.168.3.2
Printer 2	192.168.3.6
EXAM CELL	192.168.3.3
Printer 3	192.168.3.7
ENQUIRY	192.168.3.4
TPO	192.168.3.5
Printer 4	192.168.3.8


SERVER ROOM (1.0.0.0)	
FTP SERVER	1.0.0.4
PC1	1.0.0.5
DNS SERVER	1.0.0.2
WEB SERVER	1.0.0.3

INTERNET LAB (128.168.0.0)	
PC2	128.168.0.2
PC3	128.168.0.3
PC4	128.168.0.4
PC5	128.168.0.5
Printer 5	128.168.0.6


PRINCIPLE ROOM (192.168.4.0)	
PC 0	192.168.4.2
LAPTOP 0	192.168.4.3

Routing Protocol Plan


Routing Information Protocol (RIP) is a dynamic routing protocol which uses hop count as a routing metric to find the best path between the source and the destination network. It is a distance vector routing protocol which has AD value 120 and works on the application layer of OSI model.

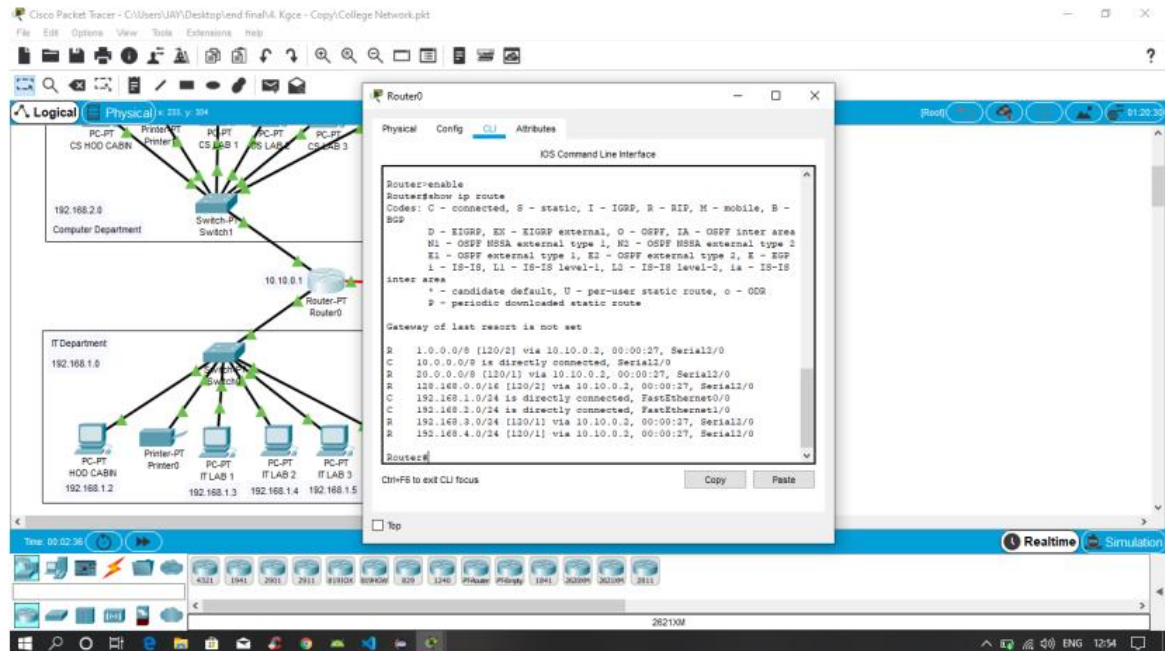

Routing Protocol Plan for Router0

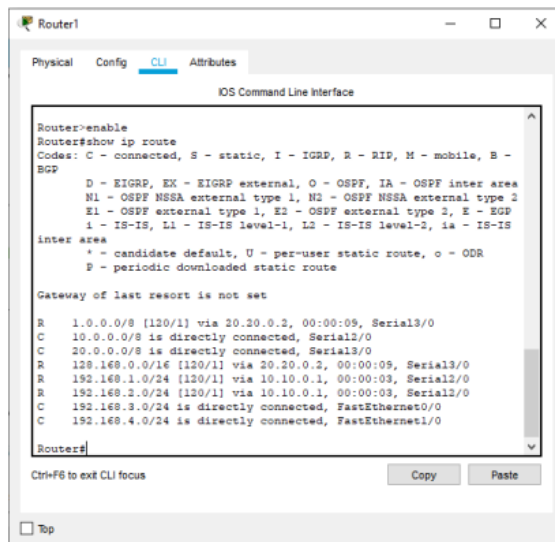

Routing Protocol Plan for Router1

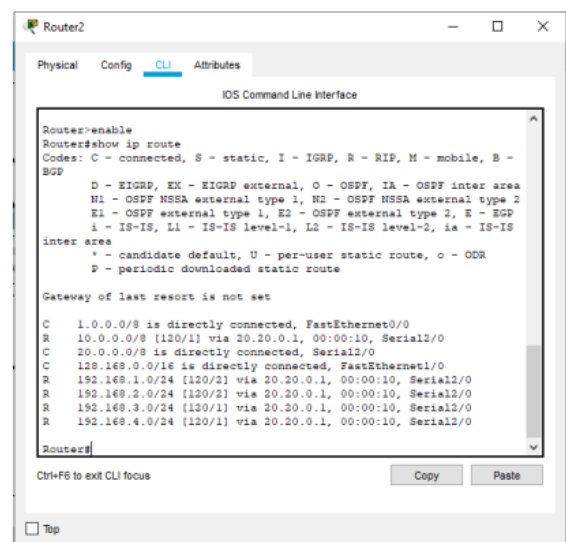

Routing Protocol Plan for Router2

Network Design


The image displays the Cisco Packet Tracer software interface, showing a network design and configuration process.

Top Screenshot: The main workspace shows a network topology. It includes several switches (e.g., S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S13, S14, S15, S16, S17, S18, S19, S20, S21, S22, S23, S24, S25, S26, S27, S28, S29, S30, S31, S32, S33, S34, S35, S36, S37, S38, S39, S40, S41, S42, S43, S44, S45, S46, S47, S48, S49, S50, S51, S52, S53, S54, S55, S56, S57, S58, S59, S60, S61, S62, S63, S64, S65, S66, S67, S68, S69, S70, S71, S72, S73, S74, S75, S76, S77, S78, S79, S80, S81, S82, S83, S84, S85, S86, S87, S88, S89, S90, S91, S92, S93, S94, S95, S96, S97, S98, S99, S100) and routers (e.g., R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24, R25, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R36, R37, R38, R39, R40, R41, R42, R43, R44, R45, R46, R47, R48, R49, R50, R51, R52, R53, R54, R55, R56, R57, R58, R59, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R70, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R84, R85, R86, R87, R88, R89, R90, R91, R92, R93, R94, R95, R96, R97, R98, R99, R100). The network is connected to a central router labeled "INSTITUTE NETWORK MANAGEMENT SYSTEM". The interface shows the "Physical" tab selected, with a toolbar at the bottom for adding devices and a "Realtime" simulation button.

Bottom Screenshot: The same network topology is shown, but with the "IT LAB 4" configuration window open. This window displays the configuration for the "FastEthernet0" interface. The configuration includes:

- IP Configuration:** Static IP address 192.168.1.6, Subnet Mask 255.255.255.0, Default Gateway 192.168.1.1, DNS Server 1.0.0.2.
- IPv6 Configuration:** Static IPv6 address FE80::20B:BEFF:FE1C:416D, Link Local Address FE80::20B:BEFF:FE1C:416D, Default Gateway, DNS Server.
- 802.1X:** Use 802.1X Security, Authentication MDS, Username, Password.

The configuration window also shows the "Physical" tab selected, with a toolbar at the bottom for adding devices and a "Realtime" simulation button.

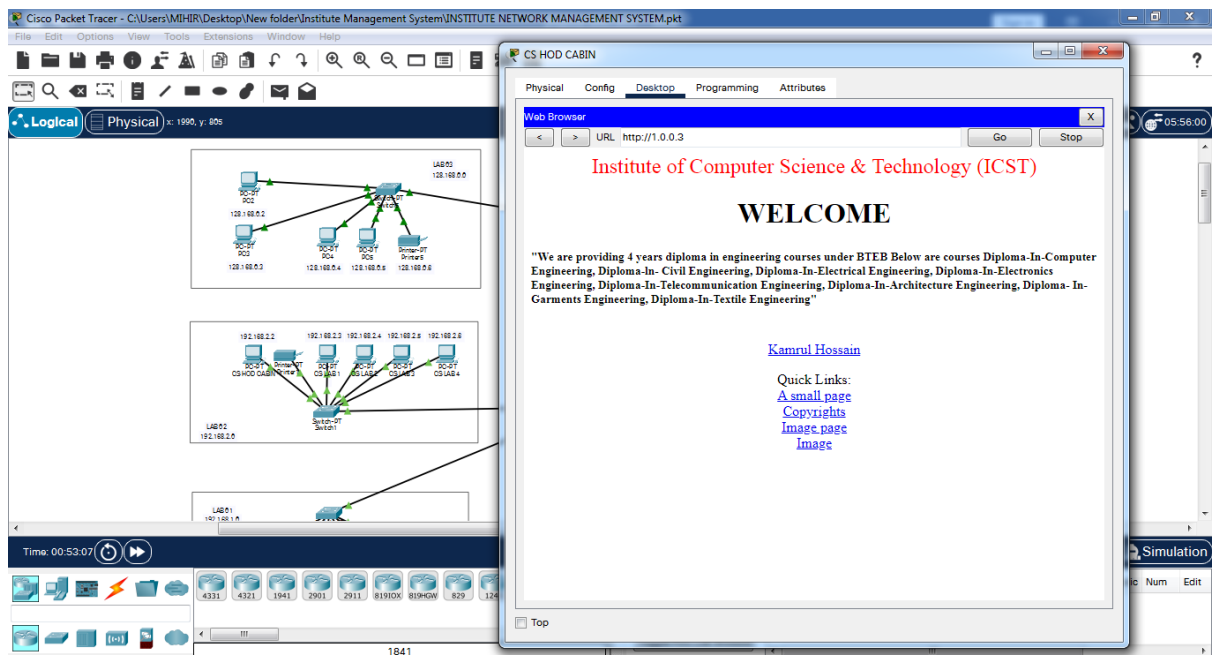

Testing Web Hosting

Summary

The outcome of the proposed system will be a fail-safe backbone network infrastructure which meets the requirements for readily available access to information and security of the private network, and also ensures optimized productivity when telecommunication services are accessed. The installed equipment allowed to organize high-speed wired and wireless Internet access throughout the whole complex of hospital buildings as well as providing transfer of all types of data throughout the single optimized network.