




iBoat ALPHA Unmanned Surface Vehicle (USV)

Applications

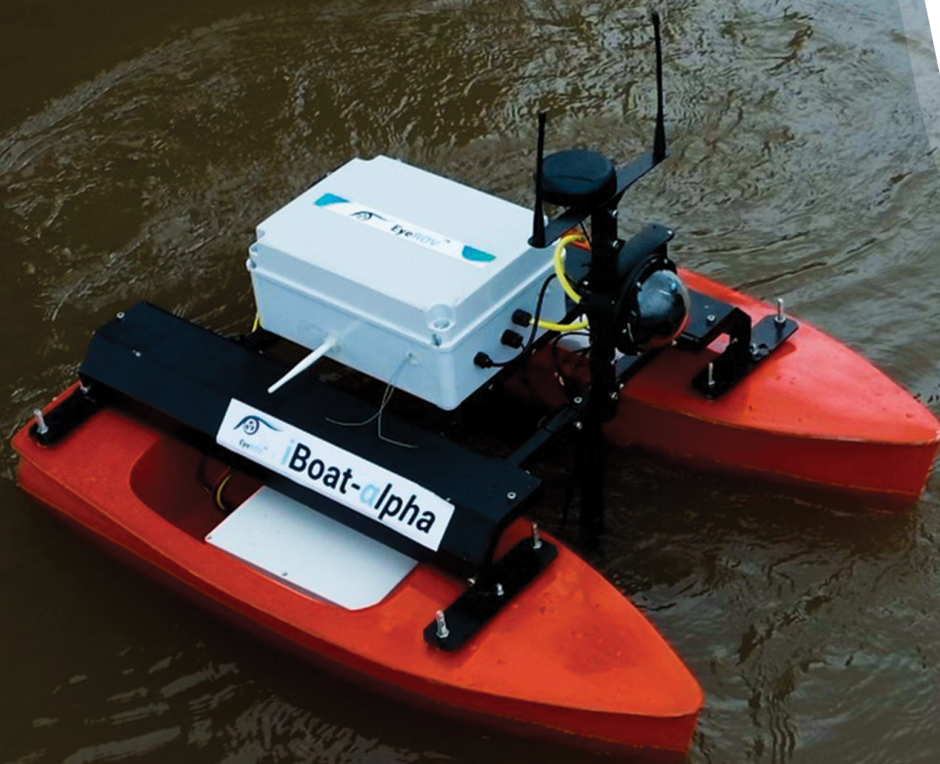

Bathymetry
Survey



Security &
Surveillance



Water Quality
Monitoring



Ports




Defence



Oil And Gas



Mission Planning

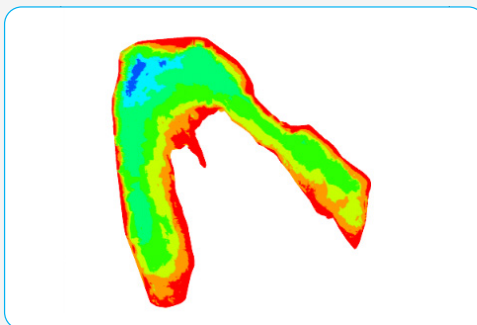

Mission Results



USV

Specifications

Autonomy

Navigation Mode	Manual or Autopilot
Auto return	Auto-return while low battery or signal loss
Autonomous Modes	Waypoint, Guided, Return To Launch

Physical

Dimension L x W x H	1050 x 860 x 860 mm
Draft	12.5cm
Weight	< 30Kg (without Battery and Payloads)
Material	Fibre Reinforced Plastic
Waterproof	IP67

Power

Propulsion	Electric (BLDC)
Battery type	Li-ion Battery 900 Wh
Motor Power	2 x 1000 W
Top Speed	3m/s

Communication

Data Communication	WiFi, RF, Optional : 4G/5G
Remote Control Range	2 - 5 Km

Positioning

Satellite System	GPSL1/L2, GLONASSL1/L2
RTK Positioning Accuracy	Horizontal: $\pm 20\text{mm} + 1 \text{ ppm}$ / Vertical: $\pm 30 \text{ mm} + 1 \text{ ppm}$

Payloads

On board payload	Single-beam echosounder, Side scan sonar and water quality sensors
Indicator light	Two-color light
Interface	Ethernet, RS232, RS485
Video	360° omnidirectional video
Obstacle avoidance	360 degree Lidar

📍 EyeROV (IROV Technologies Pvt. Ltd.)
Maker Village, Kerala Technology Innovation Zone,
Kalamassery, Kochi, Kerala- 683503

☎️ +919778631176, + 91 87146 6426

sales@eyerov.com | ✉️

www.eyerov.com | 🌐



Scan for website