



 www.eyerov.com

EyeROVTM TROUT

Military grade ROV for greater depths,
with advanced payload capabilities
and autonomous navigation



ABOUT

Discover the future of marine exploration with EyeROV TROUT. Engineered to meet the rigorous demands of the Navy, this ROV offers unparalleled maneuverability, autonomous navigation, advanced imaging capabilities and robust construction for even the most challenging missions. Dive into the depths of the ocean with confidence with an ROV that stands at the forefront of underwater technology.

HIGHLIGHT SPECS



Depth Rating: 300m



Autonomous Navigation



4K camera with 10x optical zoom



Speed Above 3 knots



HIGHLIGHT FEATURES



i-Control Hub

Intuitive and easy to use navigation software package. Simultaneous view of cameras, sonar and position overlaid on S63 ENC's.



Seamless Integrations


Equipped with an assortment of advanced payloads, with room for even more.



Indigenously Developed

Designed, developed and manufactured in India. Built to operate in the most challenging environments.

PAYLOADS

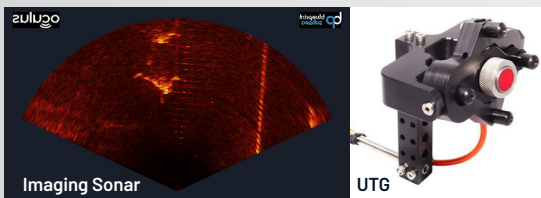

Imaging Sonar


UTG

Imaging Sonar

Dual frequency multibeam system for superior images in poor visibility

Robotic Arm

3 DoF arm equipped with grabber, rope cutter and recovery jaws.

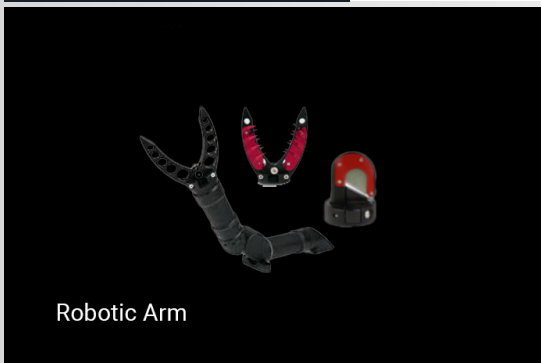

Robotic Arm

Doppler Velocity Log (DVL) / Ultra Short Baseline (USBL) / GPS

Combined positioning system for seamless underwater navigation

Ultrasonic Thickness Gauge

Non destructive testing (NDT) of ship hulls and underwater structures

SPECIFICATIONS



ROV

Size	: 890 x 510 x 390 mm
Weight (in air)	: < 40 kg (excluding payloads)
Buoyancy	: Slightly positive
Payload Capacity	: 4 kg
Ballast	: Modular (16 nos of 250g ballast weights)
Manoeuvrability	: 6 DoF (Surge, Sway, Heave, Pitch, Roll, Yaw)
Propulsion	: 4 x Vectored Horizontal Thrusters, 3 x Vertical Thrusters
Forward Speed	: Above 3 knots in still waters
Input Power	: 3600W, 400V DC
Communication	: 5 x 100 Mbps Ethernet, 2 x RS232, 1 x RS422/485
Lights	: 4 x 1500 lumen LED lights



Sensors

- 9 DoF IMU (Accelerometer, Gyro, Compass)
- Depth Sensor
- Temperature Sensor
- Voltage & Current Sensor



Camera

(Primary)

- 4K H265 IP Camera
- 10x Optical Zoom
- 60° diagonal field of view


(Secondary)

- Full HD H264 IP Camera
- Wide Angle Lens with 120° diagonal field of view
- Tilt Function (up to 90°)



TETHER

Length	: 400m
Diameter	: 13mm
Buoyancy	: Neutrally Buoyant in Fresh Water
Breaking Strength	: 500 kgf
Winch	: Hand operated
Dimensions	: 760 x 600 x 600 mm

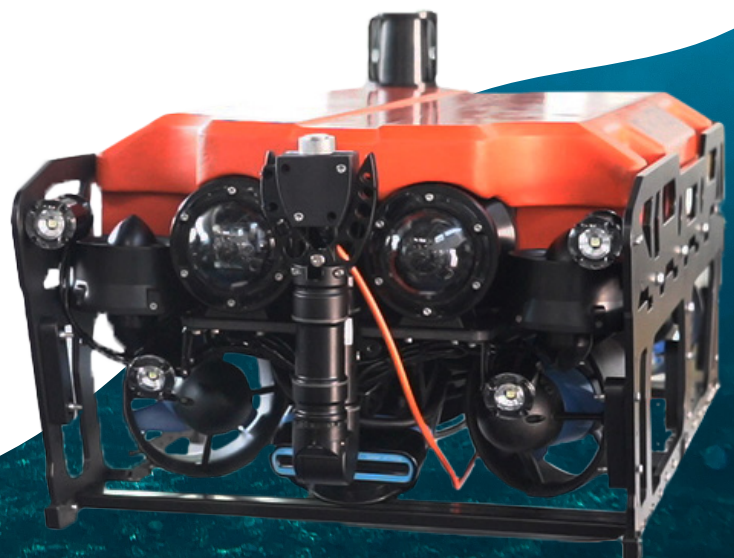



CONTROL STATION

Display	: 21.5 inch Full HD IP65 Sunlight Readable
Processor	: Intel / ARM with NVidia Graphics
RAM	: 8/16 GB
Controller	: Joystick with 5 axis, 15 buttons and 8-way hat switch, Touchscreen Display
Power Input	: 180 - 250V AC 50/60 Hz, 4 kVA
Power Output	: 400 VDC 10 A
Safety	: GFCI/RCD, Emergency Stop, LIM
Ports	: Ethernet, USB A, USB C, HDMI
Dimensions	: 740 x 720 x 640 mm

 **TROUT**



I-CONTROL HUB SOFTWARE SUITE

- Simultaneous views of multiple cameras, imaging sonar and map position
- ROV positioning on S63 Electronic Navigation Charts
- Built-in Self Test of ROV subsystems
- Programmable Joystick based control
- Data Logging & Recording
- Customizable Dashboards



ADVANCED ROV NAVIGATION

- Auto Depth
- Auto Heading
- Station Keeping
- Programmable Sequential Navigation
- GPS Waypoint Navigation
- Geofencing
- Return / Retrace to Home
- Programmable Survey Paths

APPLICATIONS



Defence



Search & Rescue



Offshore



Research



Maritime Industry

CONTACT



+916282355107



info@eyerov.com



EyeROV (IROV Technologies Pvt Ltd),
Maker Village, Kerala Technology Innovation Zone,
Kalamassery, Kochi, Kerala, India 683 503



www.eyerov.com

iDEX DISC 7 SPRINT Winner

Supported by

