
polestarindustries218@gmail.com



ADHIPLUS



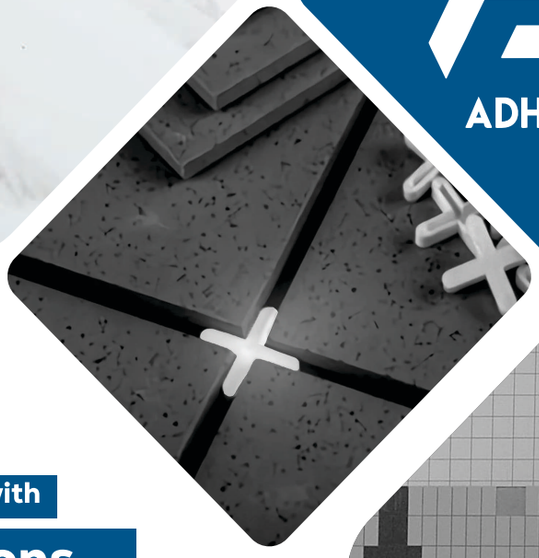

Powering Your Projects with

Quality Solutions

- Tile Adhesive
- Grey Tile Adhesive
- White Tile Adhesive
- Tile Grout
- Tile Joint Filler Epoxy Grout
- Admix Tile Grout
- Tile Fitting Accessories
- Tile Spacer
- Tile Leveling Clip
- Tile Joint Filler Sparkel Glitter
- Tile Leveling Spinner
- Tile Leveling Jack

Construction Chemical **Catlouge**

WHY USE ADHIPLUS TILE ADHESIVE?

Modern tiles are low absorbent (porosity <3%)



Without additives, a mix of sand- cement dries fast leading to early debonding.

Laying tiles traditionally with sand cement mix will create voids underneath, and makes the tiles fragile and develops cracks in the future.



Tile Adhesives are a mix of graded sand, cement, polymers, and additives specially formulated for the required combination of tiles & substrates

Additives provide water retention and sag resistance on vertical application.



Polymers provide cohesiveness allowing for even application with a trowel.

Even application ensures thorough coverage and protects tile from cracking and de-bonding.



Low VOCs in comparison to traditional adhesives help control indoor air pollution, which can cause health issues such as respiratory irritation and allergies.

FEATURES & BENEFITS



HIGH BOND STRENGTH

It has excellent adhesion properties and bonds better to substrate.



NO SHRINKAGE

Shrinkage cracks are minimized/ eliminated due to its water retaining and self-curing properties.



HIGH SAG RESISTANCE

No slip is observed on vertical applications.



ZERO WASTAGE

It is easy to apply and avoids wastage of materials.



EXTENDED OPEN TIME

Specially added polymers impart extended open time, leading to higher flexibility at the time of application.



ECONOMICAL & TIME SAVING

It is applied in a thin layer which leads to cost saving & being premixed saves time.

TILE ADHESIVE (GREY)

SILVER



P103 (Silver) Tile Adhesive is a polymer Integrated grey cement composition based adhesive for fixing ceramic tiles on internal floor and walls. It comes in a premixed, ready to use form that can be used with a number of substrates. It is water resistant and does not allow cracking of tiles.

SUITABLE FOR

- **Ceramic tile on internal floor & wall**
- **Vitrified tiles on internal floor**
- **Highly porous tiles**

TECHNICIAL SPECIFIATION

Packaging Size : 20 Kg.

Parameters	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion on (28 days)	Coverage (20 kg bag)
Specification	Grey Powder	>2 Hours	-20 Mins.	0.6-0.7 N/mm	1.1-1.2 N/mm	25-30 Sq.Ft 4mm bed thickness

GOLD



P105 (Gold) Tile Adhesive is a polymer integrated cement-based adhesive ideal for fixing normal size ceramic & vitrified tiles on floors & walls. It is water resistant and does not allow cracking of tiles.

SUITABLE FOR

- **Ceramic and vitrified tiles on internal floor & wall**
- **Tile on tile application**

TECHNICIAL SPECIFIATION

Packaging Size : 20 Kg.

Parameters	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion on (28 days)	Coverage (20 kg bag)
Specification	Grey Powder	>2 Hours	-20 Mins.	1.0-1.1 N/mm^2	1.0-1.1 N/mm	25-30 Sq.Ft 4mm bed thickness

TILE ADHESIVE

PLATINUM



P107 (Platinum) Tile Adhesive is a cement-based polymer integrated adhesive for vitrified tiles & natural stones for internal & external applications. It is water resistant and does not allow cracking of tiles.

SUITABLE FOR

- **Vitrified tiles & glass mosaic tiles, natural stones**
- **Internal & external, verticall & horizontal surfaces.**
- **Upto the height of 25 Feets**

TECHNICIAL SPECIFIATION

Packaging Size : 20 Kg.

Parameters	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion on (28 days)	Coverage (20 kg bag)
Specification	Grey Powder	>2 Hours	-30 Mins.	1.2-1.3 N/mm^2	1.4-1.5 N/mm	25-30 Sq.Ft 4mm bed thickness

DIAMOND



P109 (Diamond) Tile Adhesive is a polymer modified cement-based adhesive for fixing large format tilles and natural stone cladding on floor and walls. It is suitable for external applications. It is water resistant and does not allow cracking of tiles.

SUITABLE FOR

- **Large format Vitrified and glass mosaic tiles**
- **Granite, marble and all types of stones**
- **Internal & external, verticall & horizontal surfaces.**
- **Upto the height of 25 Feets**

TECHNICIAL SPECIFIATION

Packaging Size : 20 Kg.

Parameters	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion on (28 days)	Coverage (20 kg bag)
Specification	Grey Powder	>2 Hours	-30 Mins.	1.6-1.7 N/mm^2	1.5-1.6 N/mm^2	25-30 Sq.Ft 4mm bed thickness

WHITE TILE ADHESIVE

GOLD



P105 (Gold) Tile Adhesive is a polymer integrated white cement-based adhesive ideal for fixing normal size ceramic & vitrified tiles on floors & walls & marbels. It is water resistant and does not allow cracking of tiles.

SUITABLE FOR

- **Ceramic and vitrified tiles on internal floor & wall**
- **Tile on tile application**

TECHNICIAL SPECIFIATION

Packaging Size : 20 Kg.

Parameters	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion on (28 days)	Coverage (20 kg bag)
Specification	White	>2 Hours	-20 Mins.	1.0-1.1 N/mm^2	1.0-1.1 N/mm	25-30 Sq.Ft 4mm bed thickness

PLATINUM



P107 (Platinum) Tile Adhesive is a white cement-based polymer integrated adhesive for vitrified tiles & natural stones for internal & external applications. It is water resistant and does not allow cracking of tiles.

SUITABLE FOR

- **Vitrified tiles & glass mosaic tiles, natural stones**
- **Internal & external/verticall & horizontal surfaces.**
- **Upto the height of 35 Feets**

TECHNICIAL SPECIFIATION

Packaging Size : 20 Kg.

Parameters	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion on (28 days)	Coverage (20 kg bag)
Specification	White	>2 Hours	-30 Mins.	1.2-1.3 N/mm^2	1.4-1.5 N/mm	25-30 Sq.Ft 4mm bed thickness

WHITE TILE ADHESIVE

DIAMOND



P109 (Gold) Tile Adhesive is a polymer modified white cement-based adhesive for fixing large format tiles and natural stone cladding on floor and walls. It is suitable for external applications. It is water resistant and does not allow cracking of tiles.

SUITABLE FOR

- Large format Vitrified and glass mosaic tiles
- Granite, marble and all types of stones
- Internal & external/vertical & horizontal surfaces
- Upto the height of 35 Feets

TECHNICIAL SPECIFIATION

Packaging Size : 20 Kg.

Parameters	Appearance	Pot Life	Open Time	Tensile Adhesion (28 days)	Shear Adhesion on (28 days)	Coverage (20 kg bag)
Specification	White	>2 Hours	-30 Mins.	1.6-1.7 N/mm^2	1.5-1.6 N/mm^2	25-30 Sq.Ft 4mm bed thickness

ADHIPLUS CEMENTITIOUS GROUT



Adhipulse Tile Grout is a single component, pre-packed tile grout formulated with high-quality portland cement, selected pigments, and special aggregates. It is used for filling joints of all kinds of tiles like homogeneous, ceramic, marble, granite, mosaic and stones, CG100 is non-shrink, sag resistant, colour- fast and easy to use.

- Large format Vitrified and glass mosaic tiles
- Granite, marble and all types of stones
- Internal & external/vertical & horizontal surfaces

SUITABLE FOR

MULTIPLE COLORS

Size	Packing	MRP
1 Kg. Pouch	20 Pcs.	120/-

TECHNICIAL SPECIFIATION

Parameters	Appearance	Pot Life	Compressive Strength (7 days)	Flexural Strength (7 days)	Full Cure Time	Shrinkage	Water Absorption
Specification	Multiple Colors	>60	50-55 N/mm^2	35-40 N/mm	>30 N/mm	0.02-0.04	0.04-0.06g

ADHIPLUS GROUT ADMIXTURE

Groutmix is a white polymeric emulsion helps to enhance the strength, performance and flexibility of CG100 cementitious tile grout. This is ideal for filling wide joints under wet and dry condition on walls and floors.



SUITABLE FOR

- **All kinds of tiles and stones ceramic, vitrified large format, glazed, porcelain, glass mosaic and natural stones.**

Size	Master Packing	MRP
250 ml.	50 Pcs.	190/-
500 ml.	24 Pcs.	350/-
1 Ltr.	16 Pcs.	550/-

TECHNICIAL SPECIFIATION

Parameters	Appearance	Compressive Strength (28 Days)	Flexurall Strength (28 Days)	Water Absorption (after 240 mins)	Shrinkage
Specification	Milky White Liquid	22-24 N/mm^2	5-6 N/mm^2	4-6 g	≤3 mm/m

ADHIPLUS GROUT SHINE



Grout Shine is used to give a glittery effect and enhance the beauty of the tiles and stones. It is to be used with Epoxy Tile Grout EG 100 and is suitable for internal and external areas under wet & dry conditions on walls & floors. It is available in three colors gold, silver, and copper.

- **Using with EG100 epoxy grout for joint filling in all kind of tiles and stones**

SUITABLE FOR

SILVER COOPER GOLD

Size	Packing	MRP
100 gm.	Carton 70 Pcs.	450/-

TECHNICIAL SPECIFIATION

Parameters	Joint Width	Application Temperature	Density	Light Traffic	Tentative Mixing Ratio
Specification	2-15 mm	10°C to 35°C	1.5 g/cc	24 Hrs	50 gm in 1 kg EG100/ 3-8% of weight of Eg100

ADHIPLUS EXPOY TILE GROUT EG-100



EG-100 Epoxy Tile Grout is a three-component colour-fast, chemical resistant, hard wearing & impervious tile joint filler and is 100% stain-proof.

SUITABLE FOR

- **Joint filling in chemical & stain sensitive areas like kitchen, bathroom, swimming pool, etc.**
- **Floor and walls**

Size	Master Packing	MRP
1 kg. Bucket	20 Pcs .	1100/-
5 kg. Bucket	4 Pcs .	4200/-
5kg. (5x1) Bucket	4 Pcs .	4200/-



TECHNICIAL SPECIFIATION

Parameters	Appearance	Pot Life	Compressive Strength (7 days)	Sheer Strength (14 days)	Flexural Strength after (7 days)	Shrinkage
Specification	Port A: White viscous liquid Part Port B: Yellow viscous liquid Port C: Colored powder	>60 min	50-55 N/mm	>30 N/mm²	35-40 N/mm	0.02-0.04 m/mm

ADHIPLUS EXPOY TILE GROUT EG-200



EG-200 is a two component epoxy based tile grout specially designed for quick grouting of joints up to 10 mm with excellent chemical and mechanical resistance properties.

SUITABLE FOR

- **Dry & wet areas like bathroom, kitchen, high traffic areas, and swimming pools in residential & commercial areas including industries, hotels & shopping malls.**
- **Interior and exterior application**

Size	Master Packing	MRP
1 kg. Bucket	20 Pcs .	1100/-
5 kg. Bucket	4 Pcs .	4200/-
5kg. (5x1) Bucket	4 Pcs .	4200/-



TECHNICIAL SPECIFIATION

Packaging Size : 5 Kg. Bucket

Parameters	Appearance	Pot Life	Compressive Strength (7 days)	Flexural Strength (7 days)	Full Cure Time	Shrinkage	Water Absorption
Specification	Port A: Coloured Resin Port B: Pale Yellow viscous liquid	>60 min	50-55 N/mm²	35-40 N/mm	>30 N/mm	0.02-0.04 m/mm	0.04-0.06g

Mr. saffa नमक तेजाब



REMOVE TOUGH STAINS | KILL GERMS
WE DILUTE HCL STRONG

Size	MasterPacking	MRP
1 Ltr.	Carton 20 Pcs.	60/-

Mr. saffa TILE CLEANER


Mr. Tile Cleaner is a high-quality rapid cleaner and degreasing solution for all types of tile surfoces, designed to be used for a variety of applications. It affectively removes cementitious stains upon tiles in new bathrooms, rust marks under metal buckets, and heavy build-ups of industrial grease.



Cleans & Shines | Kill Germs | Disinfects

Size	Master Packing	MRP
500 ml.	24 Pcs.	85/-
1 Ltr.	16 Pcs.	150/-


Parameters	Appearance	Specific Gravity @30°C	Viscosity @30°C	Soaking Time	Coverage
Specification	Light Red Liquid	1.002±0.001	Equal to Water	5 mins.	Up to 5-6 m^2 / L in undiluted condition.

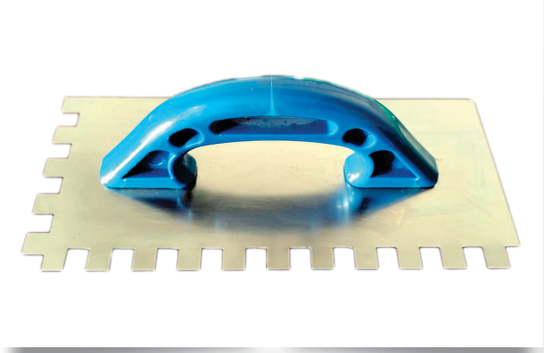


TROWEL




RUBBER HAMMER

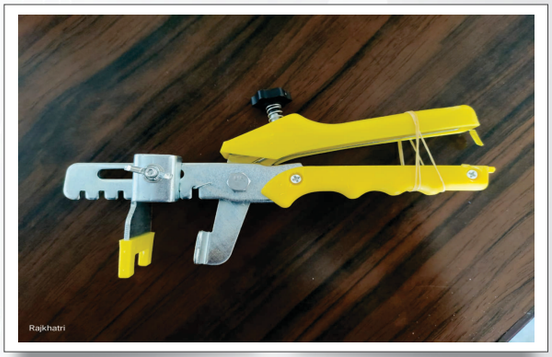

CLIP PLIER

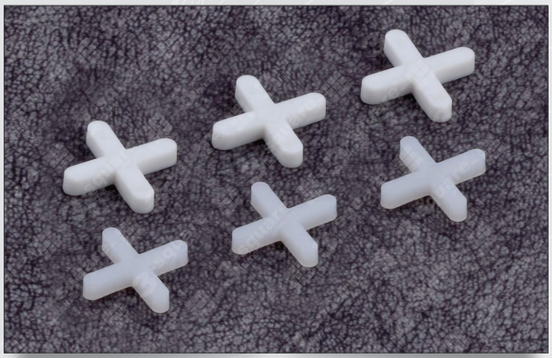

PLUS SIGN TILE SPACER

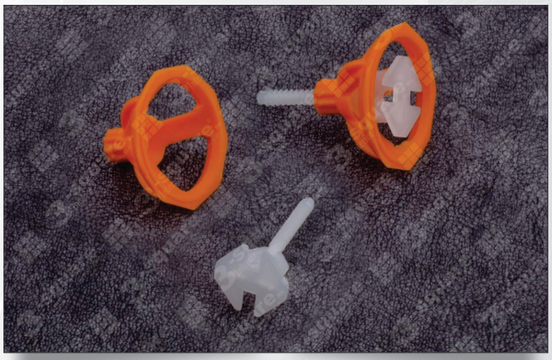

SPINNER CLIP



LEVELER CLIP



LEVELING JACK

PRODUCT SELECTOR

Application Areas	Silver	Gold	Platinum	Diamond	Gold	Platinum	Diamond
INTERNAL FLOORING							
Ceramic Tiles	✓	✓	✓	✓	✓	✓	✓
Vitrified Tiles	✓	✓	✓	✓	✓	✓	✓
Marble/Granite/ Other Stones		✓	✓	✓	✓	✓	✓
Glass Mosaic			✓	✓	✓	✓	✓
EXTERNAL FLOORING							
Ceramic Tiles	✓	✓	✓	✓	✓	✓	✓
Vitrified Tiles		✓	✓	✓	✓	✓	✓
Marble/Granite/Other Stones			✓	✓	✓	✓	✓
Glass Mosaic			✓	✓		✓	✓
INTERNAL WALL (CONCRETE / PLASTERED SURFACE)							
Ceramic Tiles	✓	✓	✓	✓	✓	✓	✓
Vitrified Tiles		✓	✓	✓	✓	✓	✓
Marble/Granite/ Other Stones			✓	✓	✓	✓	✓
Glass Mosaic				✓		✓	✓
Drywalls				✓			✓
Metal Surfaces							
EXTERNAL WALL							
Ceramic		✓	✓	✓	✓	✓	✓
Marble/Granite/Other Stones			✓	✓	✓	✓	✓
Glass Mosaic				✓		✓	✓
Drywalls				✓			✓
Vitrified Tiles			✓	✓	✓	✓	✓



ADHIPLUS

Manufactured & Packed By

POLE STAR FINECHEM INDIA

FOR MORE INFORMATION, CONTACT

+91 70142-46052 | +91 94603-74990

Plot No. : H-38 RIICO, Phase 2nd, Hanumangarh Junction-335512-INDIA

CERTIFIED ISO 9001:2008 COMPANY