


Architettura

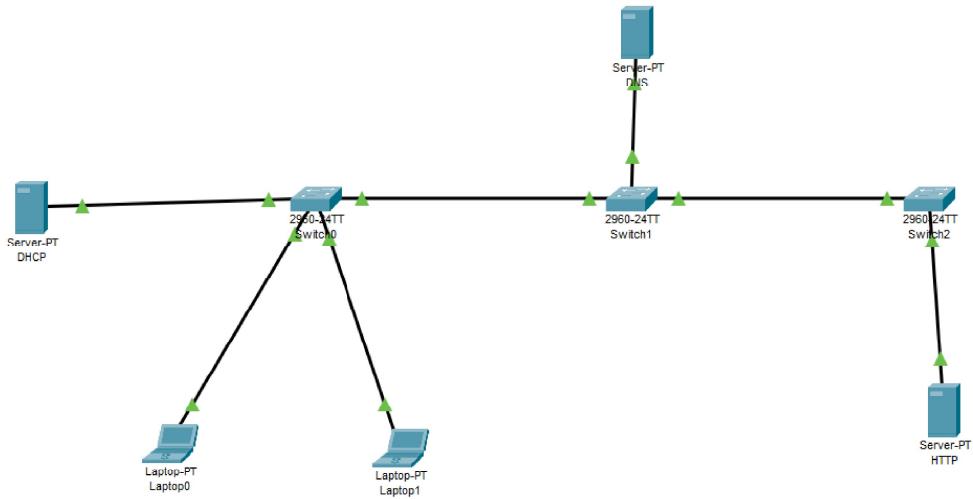


DHCP Server config


DHCP

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	192.168.100.1	192.168.100.4	192.168.100.11	255.255.255.0	245	0.0.0.0	0.0.0.0


Laptop0

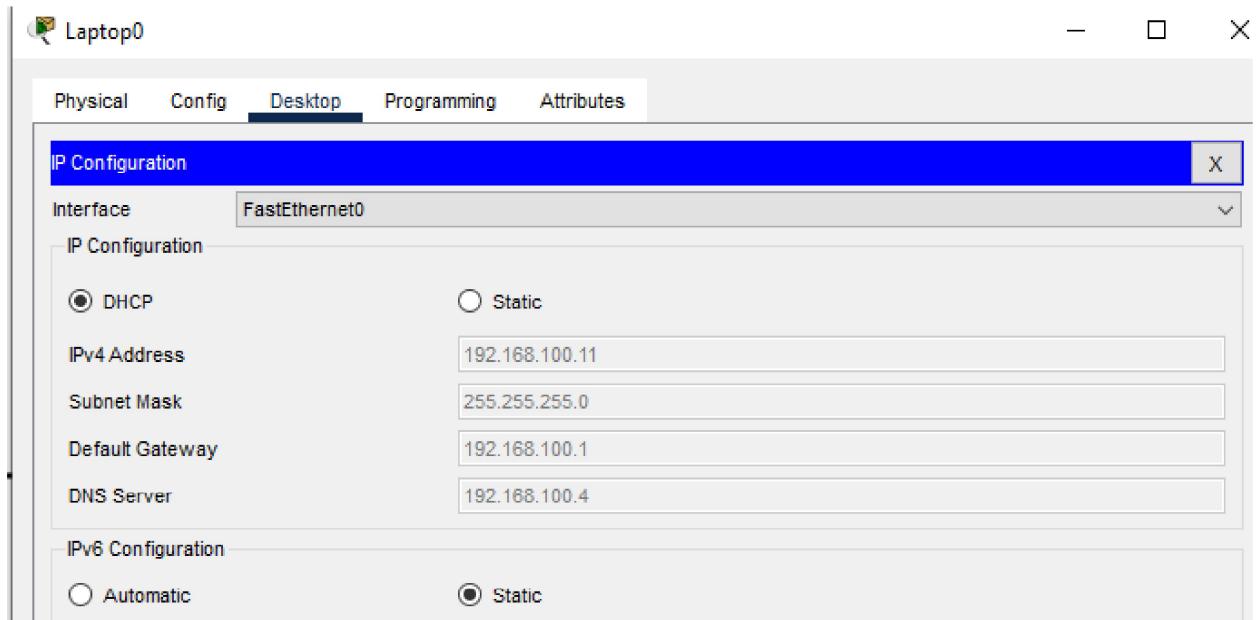

DNS server

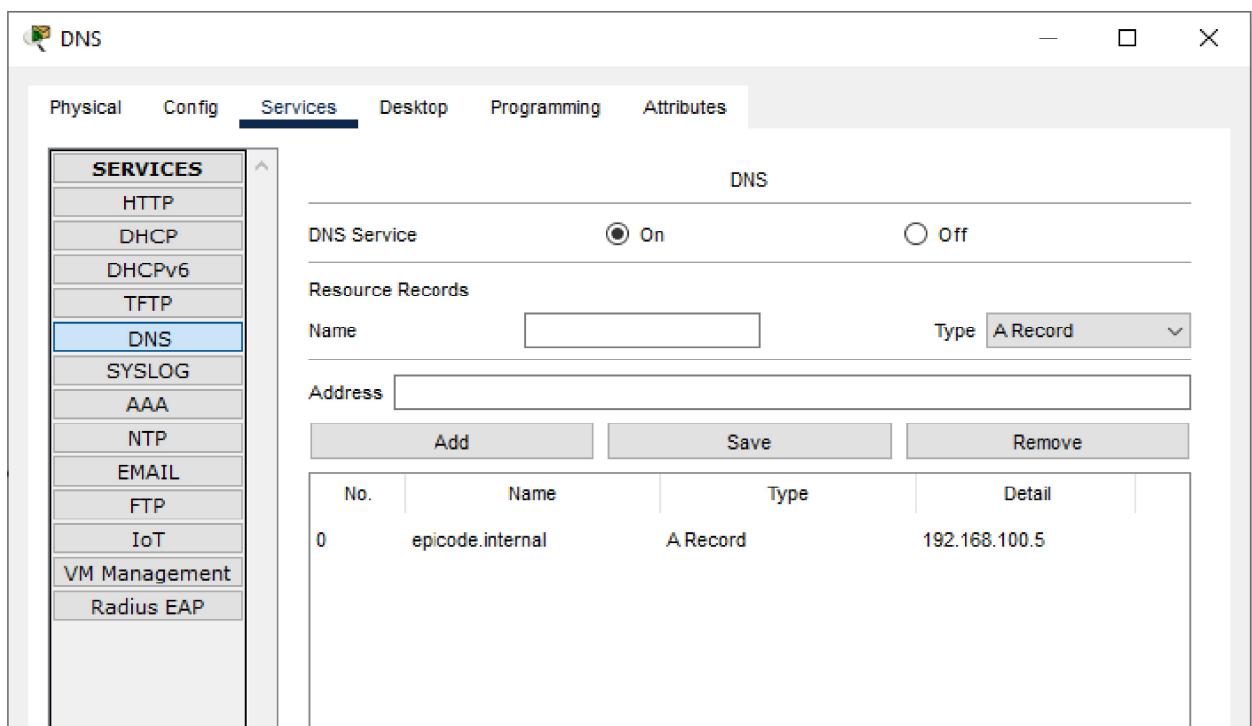

HTTP Server

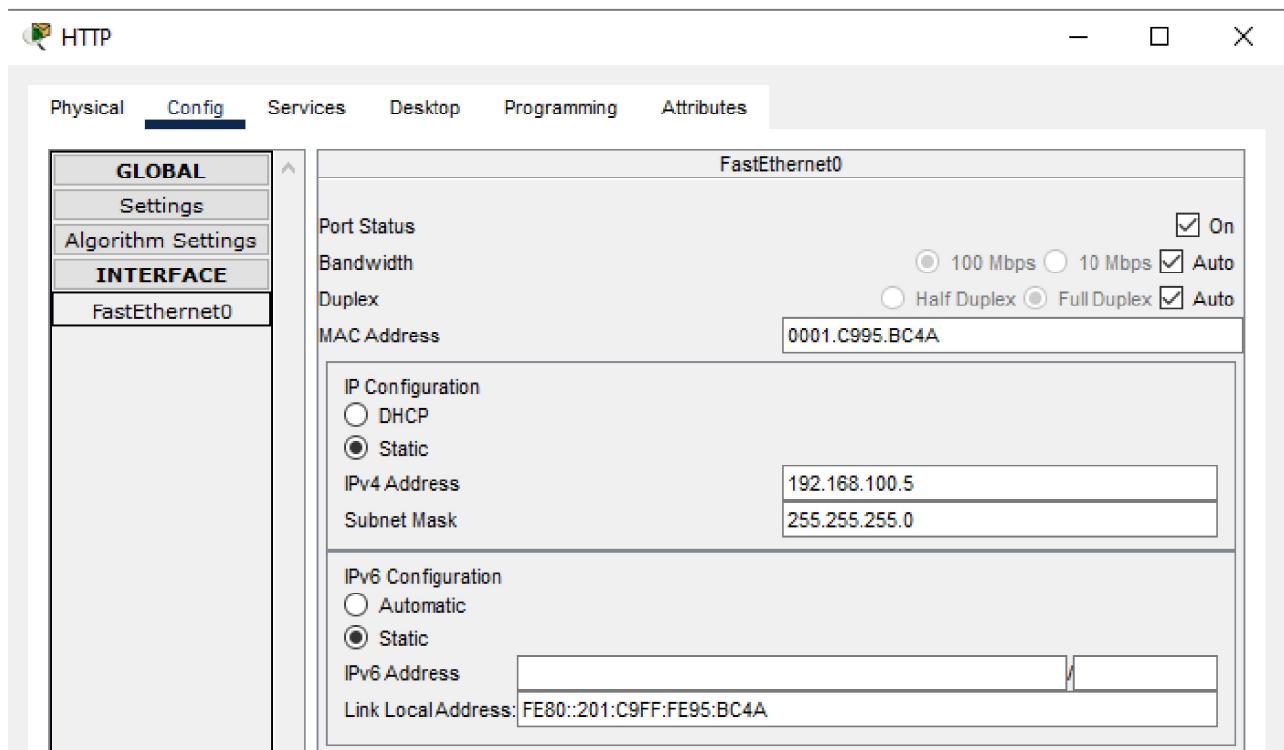

Ping da laptop0

Laptop0

Physical Config Desktop Programming Attributes

Command Prompt X

```
C:\>ipconfig

FastEthernet0 Connection:(default port)

Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: FE80::20B:BEFF:FE6:BE4E
IPv6 Address..... :: :
IPv4 Address.....: 192.168.100.11
Subnet Mask.....: 255.255.255.0
Default Gateway..... :: :
                           192.168.100.1

Bluetooth Connection:

Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: :: :
IPv6 Address..... :: :
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway..... :: :
                           0.0.0.0

C:\>ping epicode.internal

Pinging 192.168.100.5 with 32 bytes of data:

Reply from 192.168.100.5: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.100.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

Top