






OPERATION:	TANDEM CRANE LIFT	RIG:	DTN/DAT	PIC:	 CRANE OPERATOR 1 - TBD1
------------	-------------------	------	---------	------	--

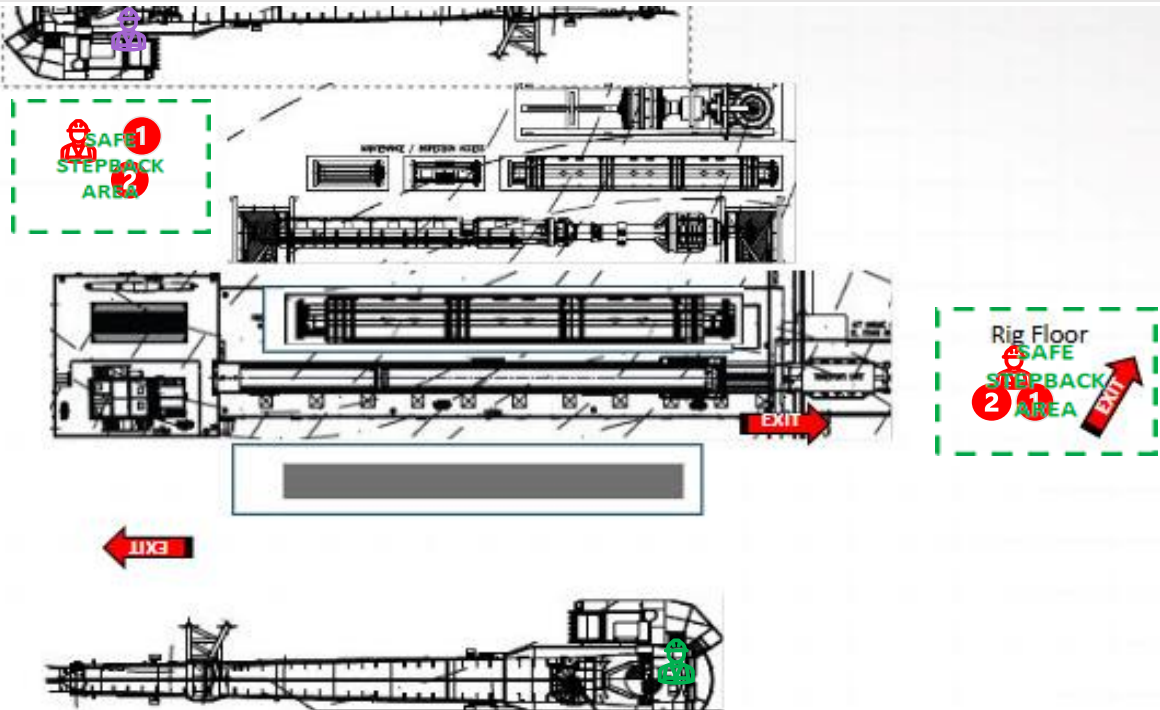


LINE OF FIRE (LOF) - MAJOR HAZARDS:	Pinch points and dropped objects
-------------------------------------	----------------------------------



The diagram illustrates the rig floor layout for a tandem crane lift. It shows two designated 'SAFE STEPBACK AREAS' marked with green dashed boxes and numbered 1 and 2. Area 1 is located near the top left, and Area 2 is located near the bottom right. Exit points are indicated by red arrows labeled 'EXIT'. The rig floor is labeled 'Rig Floor SAFE STEPBACK AREA'.

**PERSONNEL INVOLVED IN OPERATION**

-  CRANE OPERATOR 2 - TBD2
-  BANKSMAN 1 - TBD3
-  1 ROUSTABOUT 1 - TBD4
-  2 ROUSTABOUT 2 - TBD5

Max LOF	Task Step	Personnel involved in Task Step
1	1.Banksman instruct crane operator to designated area to attach rigging to crane.( One crane at a time)	
3	2. Roustabouts connect cranes to load. Once cranes are both attached to the load, banksman & Roustabouts (2) proceed to designated step back areas.	 1 2
1	3.Banksman then instructs crane operators to proceed with hoisting, clearing all obstruction and transfer the load to designated landing area.	
0	Banksman & Crane Operators (2) to confirm all personnel are in designated step back areas before landing lift	CHOOSE PERSONNEL

Max LOF	Task Step	Personnel involved in Task Step

3	4. Banksman and roustabouts (2) proceed to the load and disconnect rigging	 1 2			
---	--	---	--	--	--

**NOTE:** HAZARD IDENTIFICATION PROMPT CARD TO BE USED FOR ANY DEVIATION FROM THIS JBD PLAN.