NTC Thermistor Sensor

Catherine Beryl Basson, Piotr Chromiński

13 December 2016

1 Introduction

The NTC thermistors display non-linear resistance characteristics with temperature. The resistance of an NTC will decrease at the temperature increases. This behaviour is related to it's constant value B. This phenomenon allows for use of an NTC thermistor as a temperature sensor. In the discussed experiments a Vishay NTCLE100E3 thermistor was used, with $B = 3977°K$.

2 Experiments

Two experiments were conducted. First, to determine characteristics of the non-linear response of the NTC: resistance-temperature R-T and temperature-resistance T-R, maximum non-linearity $\hat{N}$ as % of full scale deflection $f.s.d$; response of a system linearised by a parallel resistor. Second, to find the time constant τ of the measurement system. Raw data of all measurements is presented in the Apendix.

2.1 R-T Characteristics

To measure the R-T and T-R characteristics the resistance was measured with an AMPROBE AM-510-EUR multimeter, and recorded over temperature range 90–45°C. This was achieved by measuring the temperature of water in a cup, which was cooled from 100° to 45°.

To determine the parallel resistor value $R_{T_{ctr}}$ was recorded at $T_{ctr} = 72.5°C$ and calculated using the eqation.

2.2 Time Constant

3 Results

3.1 R-T Characteristics

3.2 Time Constant

3.2.1 Non-Linear

Equation for expected intermediate temperatures, taken from the thermistor's datasheet here modified for temperature T in $°C$

$$R_{(T)} = R_{ref} \cdot e^{A + \frac{B}{T+273.15} + \frac{C}{(T+273.15)^2} + \frac{D}{(T+273.15)^3}}$$

Where A, B, C, and D are constant values which are dependent on the thermistor; R_{ref} is the resistance at a reference temperature—for the thermistor used in the experiment it is 10000Ω.

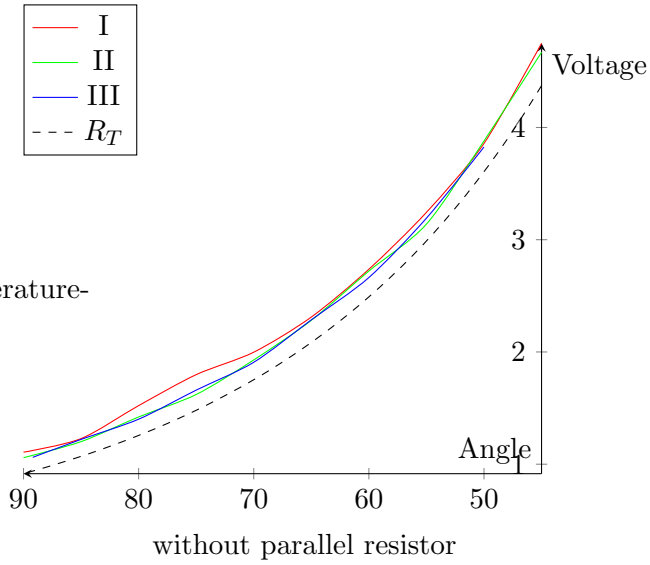

without parallel resistor

3.2.2 Linear

4 Error Discussion

5 Tables

6 Equations

Equation for parallel linearising resistor taken from Siemens Note(?):

$$R_p = R_{T_{ctr}} \cdot \frac{B - T_{ctr}}{B + 2T_{ctr}}$$

where $R_{T_{ctr}}$ is thermistor resistance at the center temperature T_{ctr} and B is the B value of a thermistor.

7 Graphs

8 Conclusion

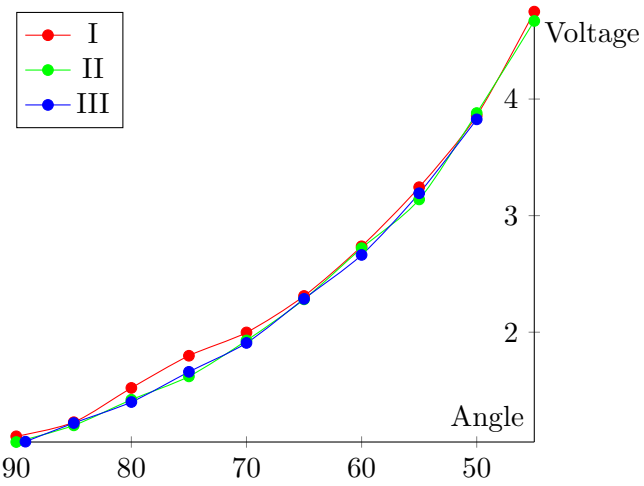

without parallel resistor

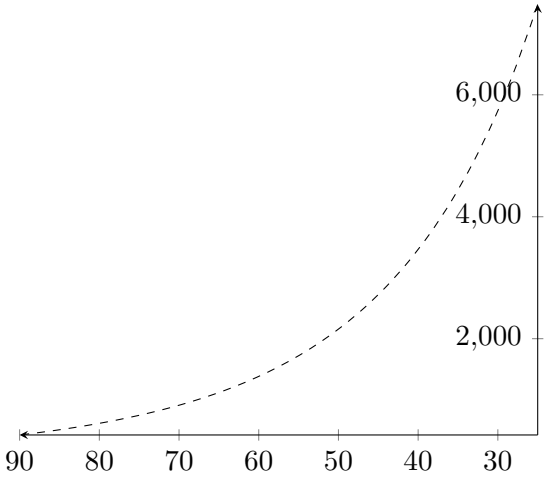

$$R_{(T)} = R_{ref} \cdot e^{A+\frac{B}{T}+\frac{C}{T^2}+\frac{D}{T^3}}$$

with parallel resistor