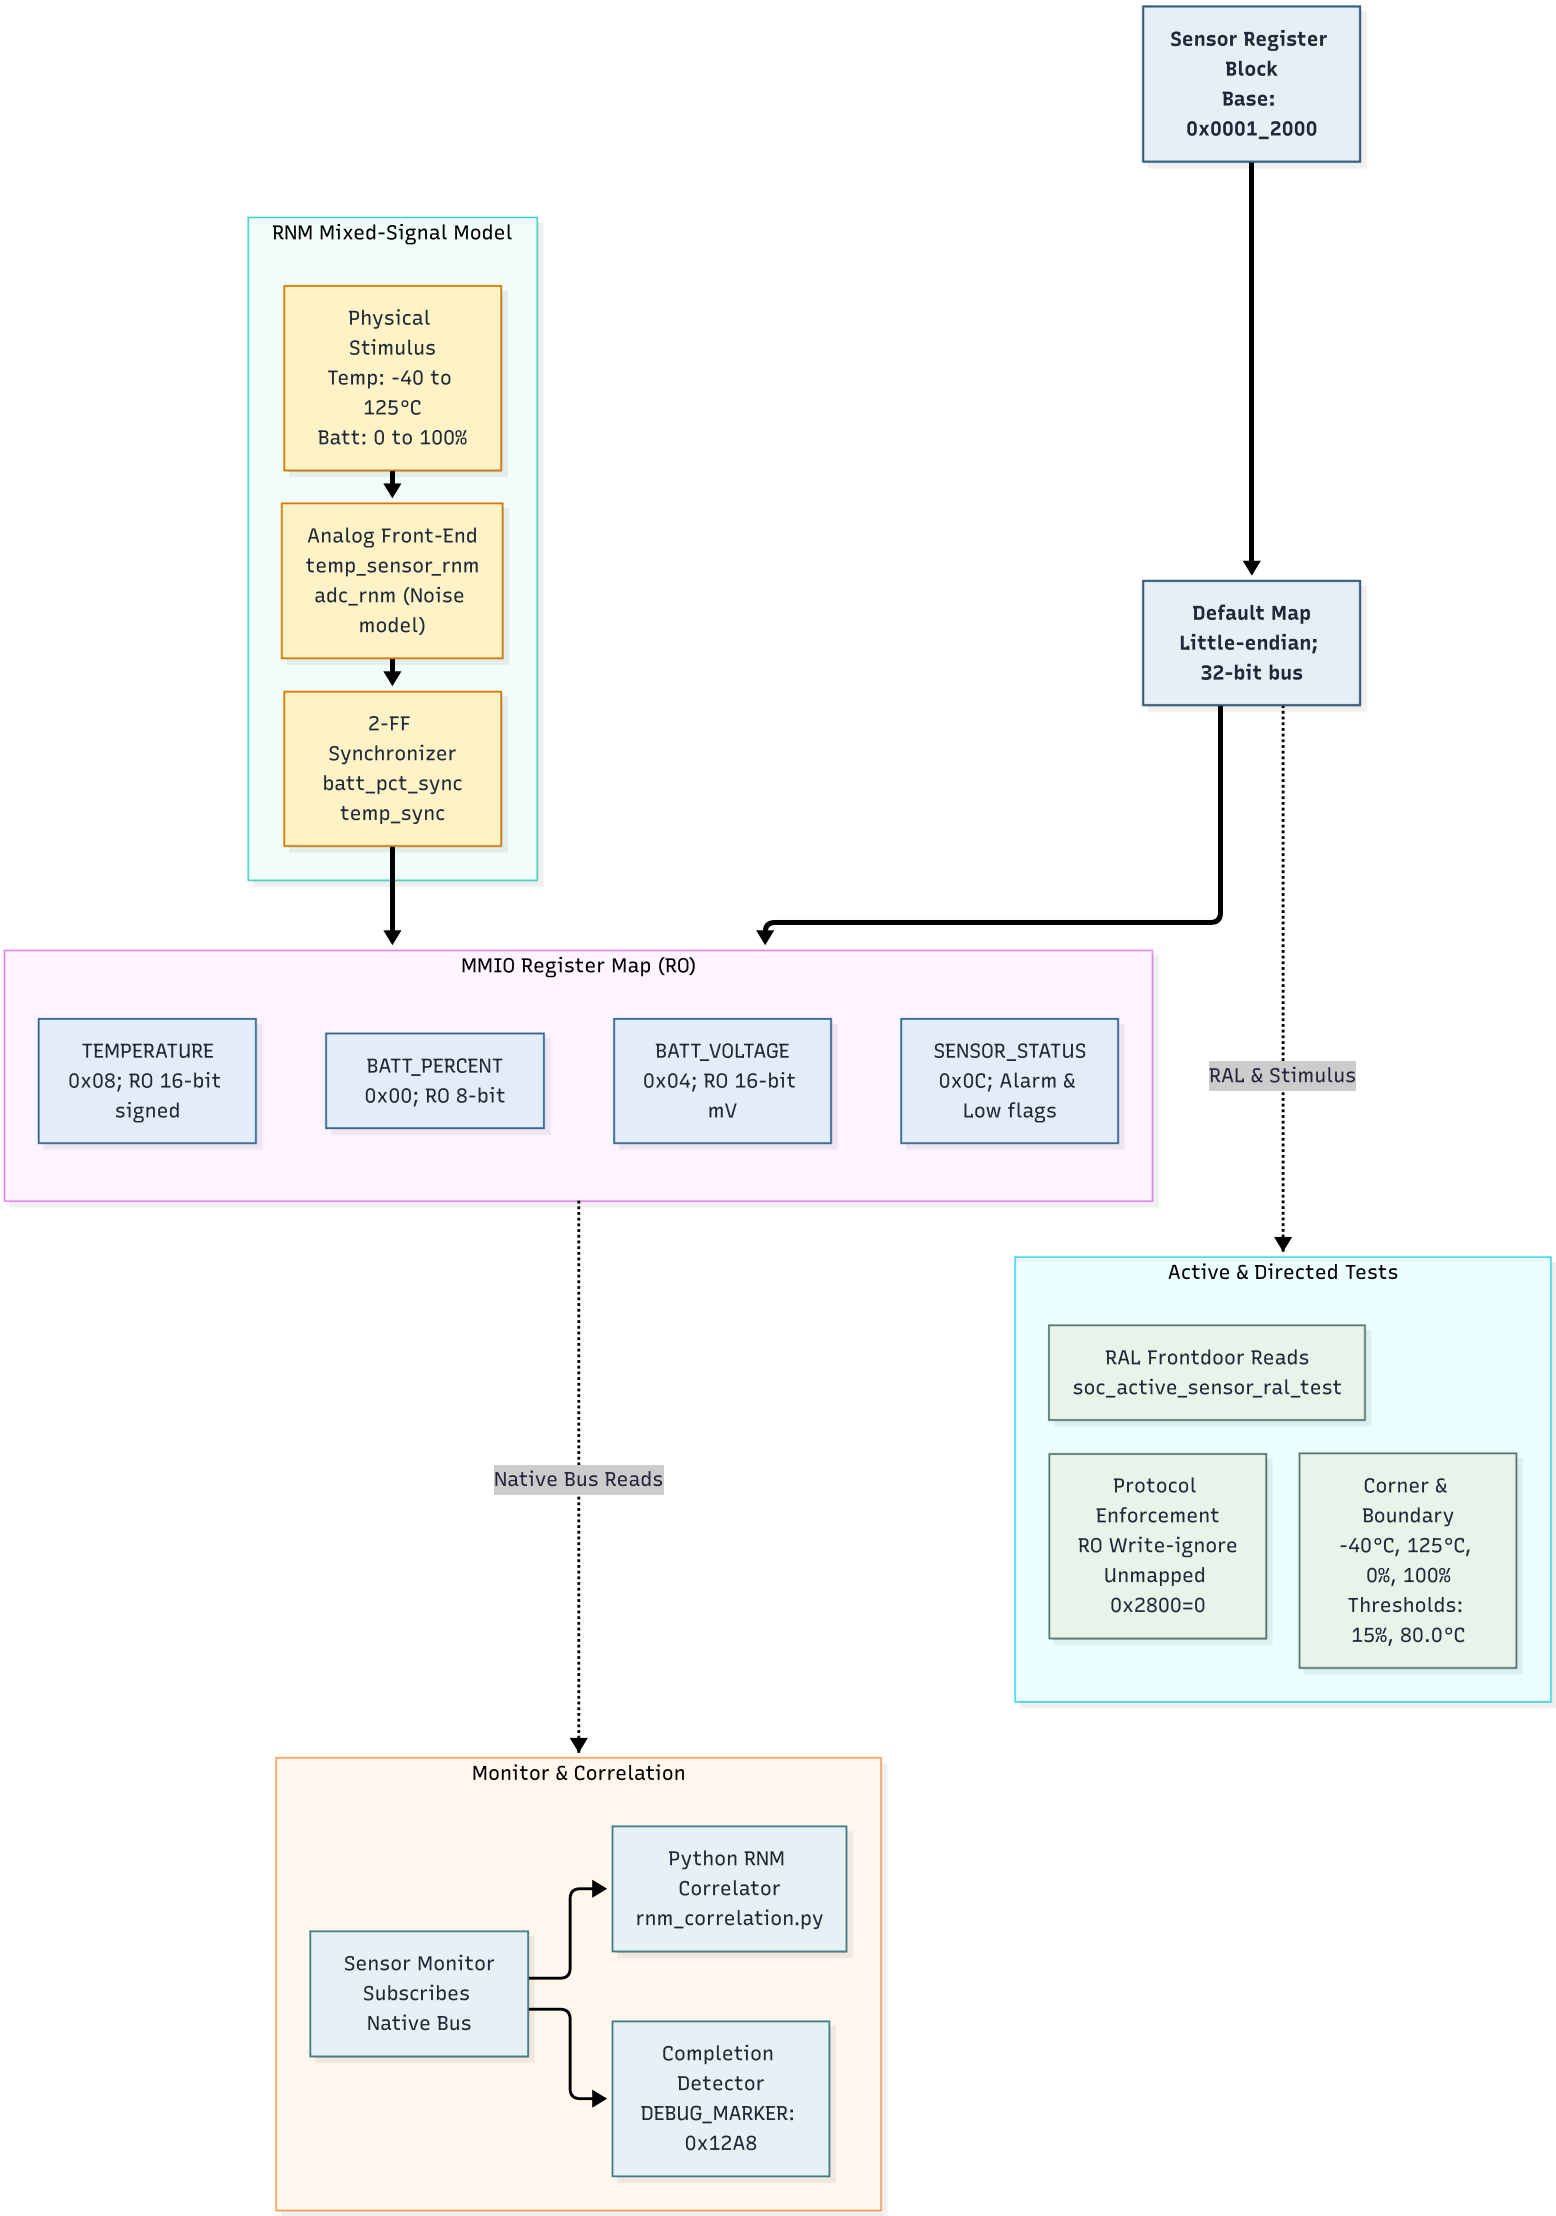

Sensor Register Block Base: 0x0001_2000
RNM Mixed-Signal Model
Physical Stimulus Temp: -40 to 125°C Batt: 0 to 100%
Analog Front-End temp_sensor_rnm adc_rnm (Noise model)
2-FF Synchronizer batt_pct_sync temp_sync
Default Map Little-endian; 32-bit bus
MMIO Register Map (RO)
TEMPERATURE 0x08; RO 16-bit signed
BATT_PERCENT 0x00; RO 8-bit
BATT_VOLTAGE 0x04; RO 16-bit mV
SENSOR_STATUS 0x0C; Alarm & Low flags
RAL & Stimulus
Active & Directed Tests
RAL Frontdoor Reads soc_active_sensor_ral_test
Protocol Enforcement RO Write-ignore Unmapped 0x2800=0
Corner & Boundary -40°C, 125°C, 0%, 100% Thresholds: 15%, 80.0°C
Native Bus Reads
Monitor & Correlation
Python RNM Correlator rnm_correlation.py
Sensor Monitor Subscribes Native Bus
Completion Detector DEBUG_MARKER: 0x12A8