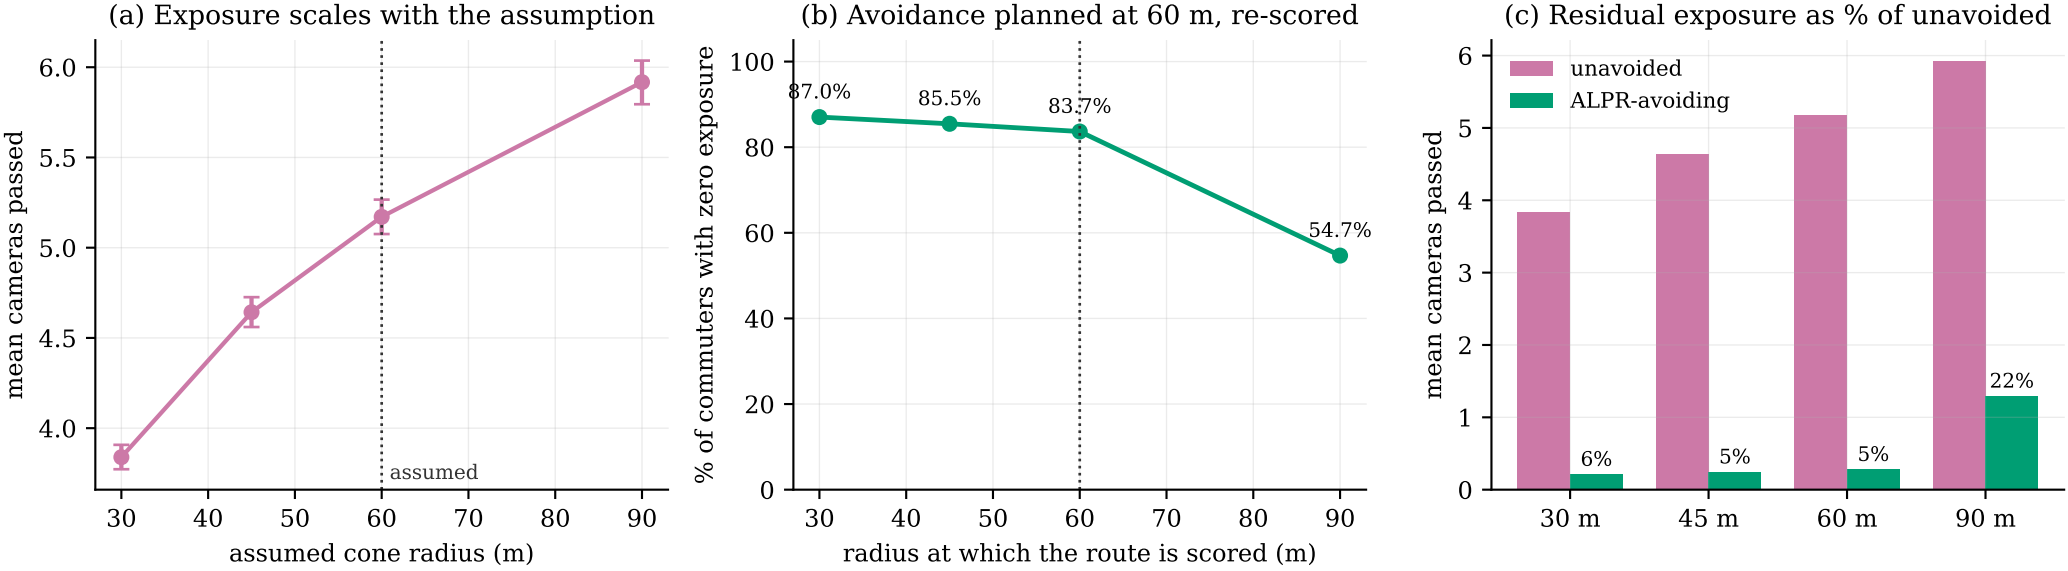
(a) Exposure scales with the assumption
mean cameras passed
6.0
5.5
5.0
4.5
4.0
assumed
30
40
50
60
70
80
90
assumed cone radius (m)
(b) Avoidance planned at 60 m, re-scored
% of commuters with zero exposure
100
80
60
40
20
0
87.0%
85.5%
83.7%
54.7%
radius at which the route is scored (m)
(c) Residual exposure as % of unavoided
mean cameras passed
unavoided
ALPR-avoiding
6
5
4
3
2
1
0
6%
5%
5%
22%
30 m
45 m
60 m
90 m