



AURO PUMPS PVT.LTD.

Estb. 1984 in Technology Transfer from Pompe Vergani SpA of Italy



ACC-J

**HORIZONTAL
END SUCTION
JACKETED PUMPS**



ACCV-J

**VERTICAL SUBMERGED
EXTENDED SHAFT
JACKETED PUMPS**




ACC-J

ACC-J series pumps are centrifugal, single stage end suction pumps derived from our ACC pumps. These are specially designed for handling crystallizing fluids. The jacketed volute casing and stuffing box design ensures that the liquid does not crystallize inside the pump assembly. A semi-open or open type impeller design prevents choking of the impeller vanes from the crystallizing liquid. Specially designed single or double acting mechanical seals provide reliable shaft sealing for such challenging applications. These pumps are in accordance with ISO2858, ISO 5199 and DIN 24256 standards.

TECHNICAL DETAILS

CAPACITY	<i>upto 1000 m³/hour</i>
HEAD	<i>upto 160 m</i>
SIZE	<i>25 to 250 mm</i>
TEMPERATURE	<i>25°C to + 400°C</i>
OPERATING FREQUENCY	<i>50Hz and 60Hz</i>
MATERIAL OF CONSTRUCTION	<i>WCB, WC6, WC9, CF8/CF3 (SS304/304L), CF8M/CF3M (SS316/316L), SS310, SS347/347H, Alloy-20, CD4MCu, CA6NM, Super Duplex Steel, Inconel, Monel, Hastelloy C276</i>

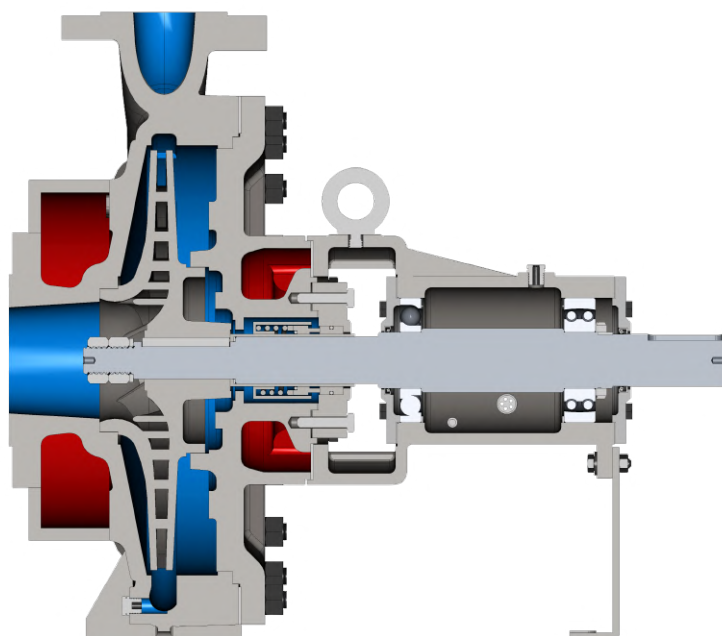


ACCV-J

ACCV-J series pumps are centrifugal, single stage vertical submerged extended shaft pumps derived from our ACCV pumps. These are specially designed for handling crystalizing fluids. The fully jacketed pump assembly encompassing the volute casing, stuffing box, shaft assembly and discharge pipe ensures that the liquid does not crystalize inside the pump assembly. A semi-open or open type impeller design prevents choking of the impeller vanes from the crystalizing liquid. High temperature gland packing, single or double acting mechanical seals provide reliable shaft sealing against hazardous fumes and vapor.

TECHNICAL DETAILS

CAPACITY	<i>upto 1000 m³/hour</i>
HEAD	<i>upto 160 m</i>
SUBMERGENCE LENGTH	<i>upto 6m. Longer submergence lengths provided on request</i>
SIZE	<i>25 to 250 mm</i>
TEMPERATURE	<i>25°C to +400°C</i>
OPERATING FREQUENCY	<i>50Hz and 60Hz</i>
MATERIAL OF CONSTRUCTION	<i>WCB, WC6, WC9, CF8/CF3 (SS304/304L), CF8M/CF3M (SS316/316L), SS310, SS347/347H, Alloy-20, CD4MCu, CA6NM, Super Duplex Steel, Inconel, Monel, Hastelloy C276</i>

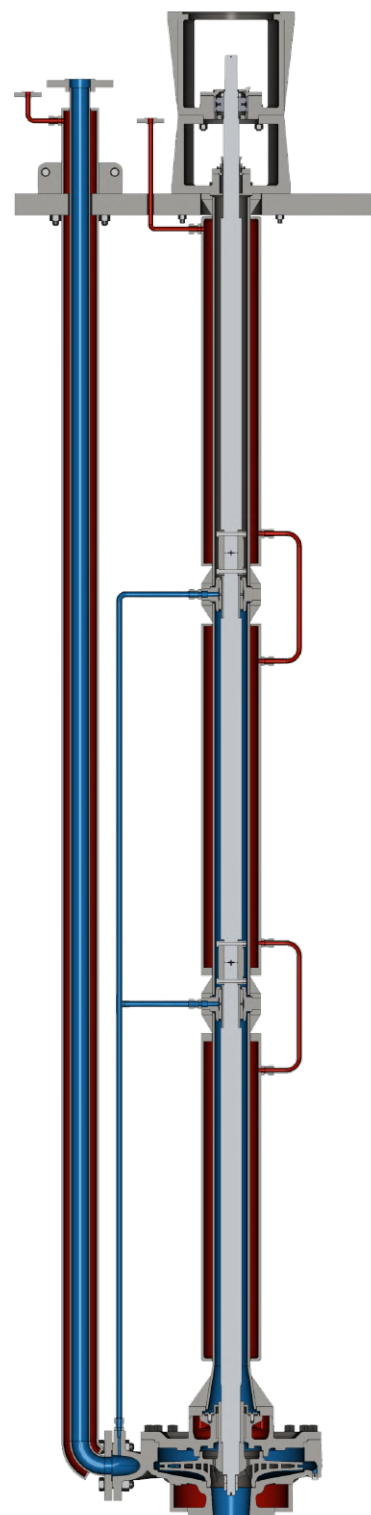

APPLICATIONS OF ACC-J AND ACCV-J

SULPHURIC ACID AND MOLTEN SULFUR	ORGANIC, INORGANIC & SPECIALTY CHEMICALS	PHTHALIC ANHYDRIDE & MALEIC ANHYDRIDE
ANTHRACENE & CARBON PRODUCTS	OIL AND GAS REFINERIES	TANKER LOADING & UN-LOADING
BITUMEN AND COAL-TAR	FERTILIZER INDUSTRY & MOLTEN UREA	SULFUR DEGASSING & POWER PLANTS



WORKS: 104/5/6, G.I.D.C., Palej - 32220. Dist. Bharuch, Gujarat, India
 OFFICE: 309 Nilamber Primero, Vasna - Bhayli road, Vadodara, Gujarat, India - 391410

☎ : +91 92272-27768 | +91 88669-27768 | +91 97279-55542
 ✉ : sales@auropumps.com 🌐 : www.auropumps.com

