Operating Systems

CSE 231

Instructor: Sambuddho Chakravarty

(Semester: Monsoon 2020)

Week 3: Oct 5 – Oct 8

Process Scheduling

- General Idea
  - The CPU runs each program for a ``short duration'' – aka timeslice.
  - The PIC interrupts the CPU PIT (programmable interval timer) interrupt handler task scheduler.
  - Task scheduler: selects the next task to be run from the **ready queue** (aka **runqueue** in Linux).
  - Currently **running** task may be pushed back into the ready queue until again its timeslice is allocated (decided by the scheduling policy). Process goes to **ready** state.
  - Periodically there may be other interrupts – I/O, syscall etc. wherein the process goes to **waiting** state (different from **ready** state)

Objective of Process Scheduling

- Maximum CPU utilization obtained with multiprogramming
- CPU–I/O Burst Cycle – Process execution consists of a **cycle** of CPU execution and I/O wait
- **CPU burst** followed by **I/O burst**
- CPU burst distribution is of main concern

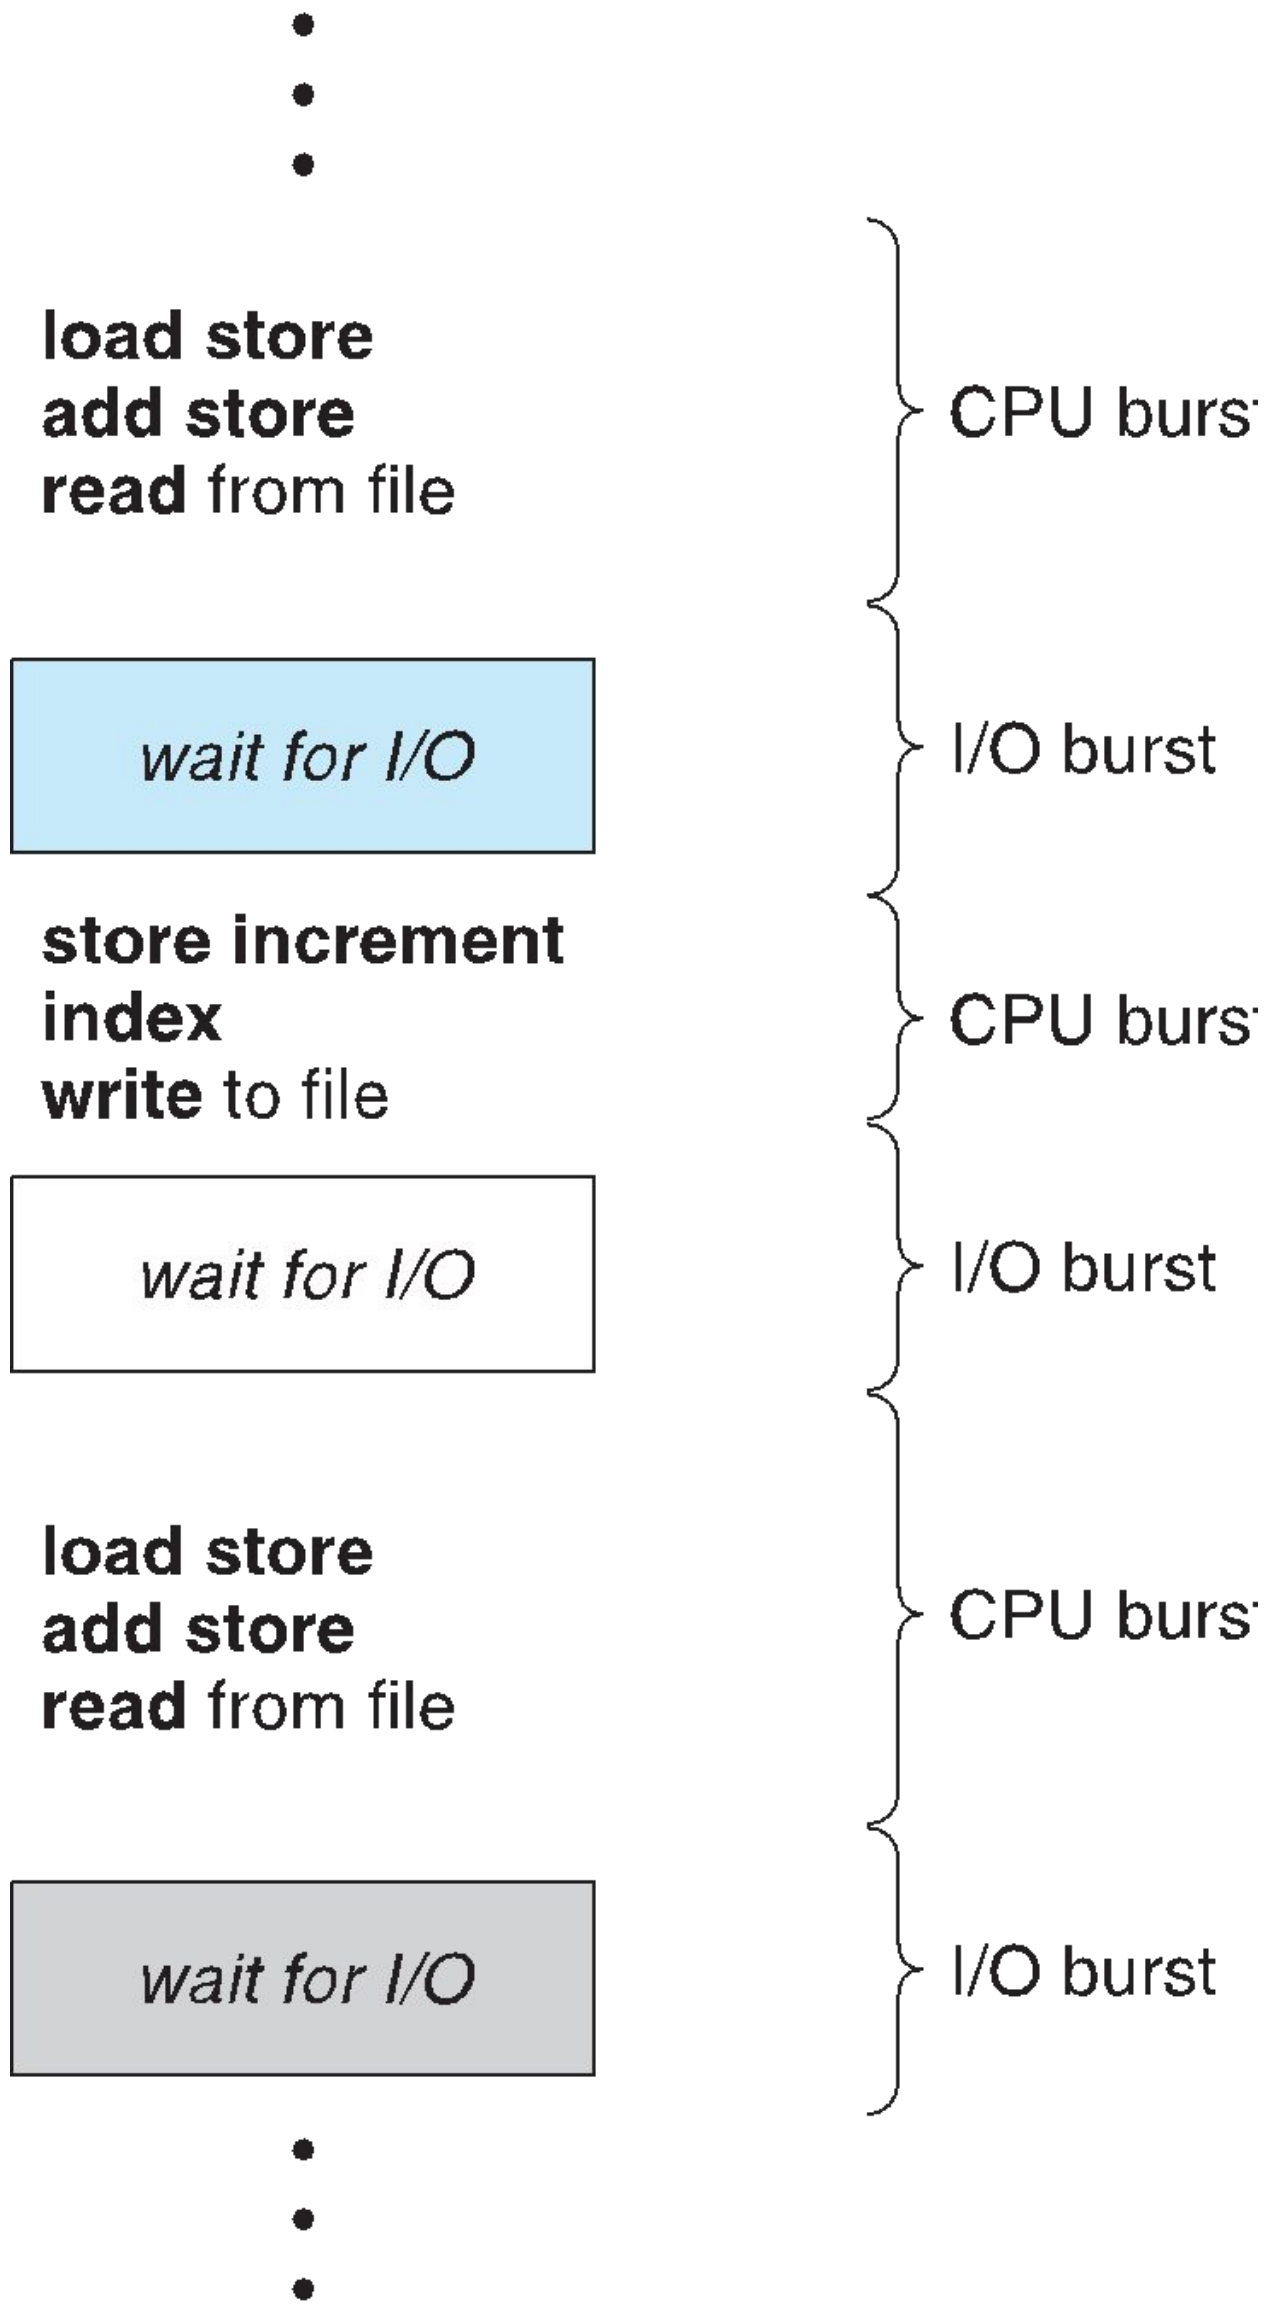

Process State

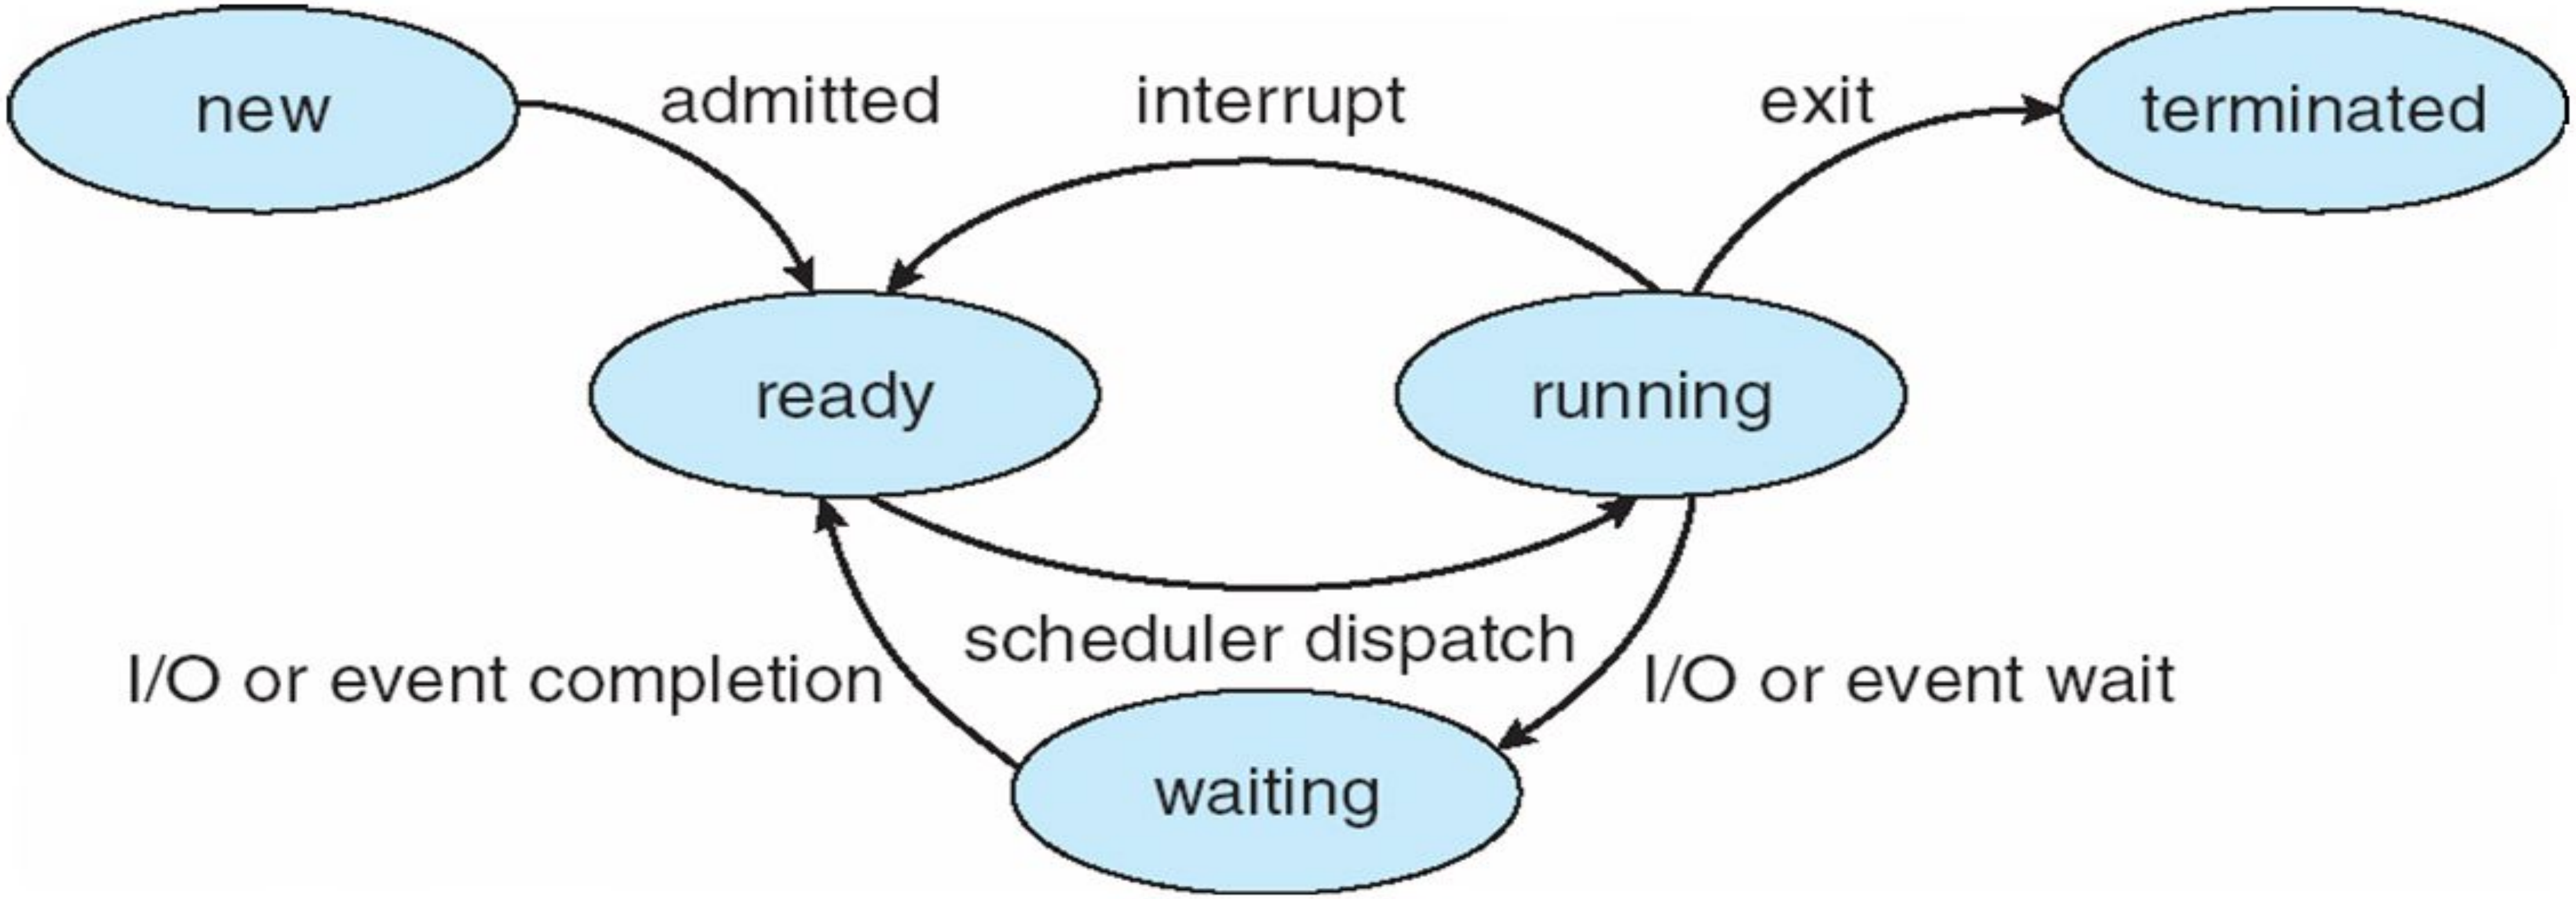

Process States

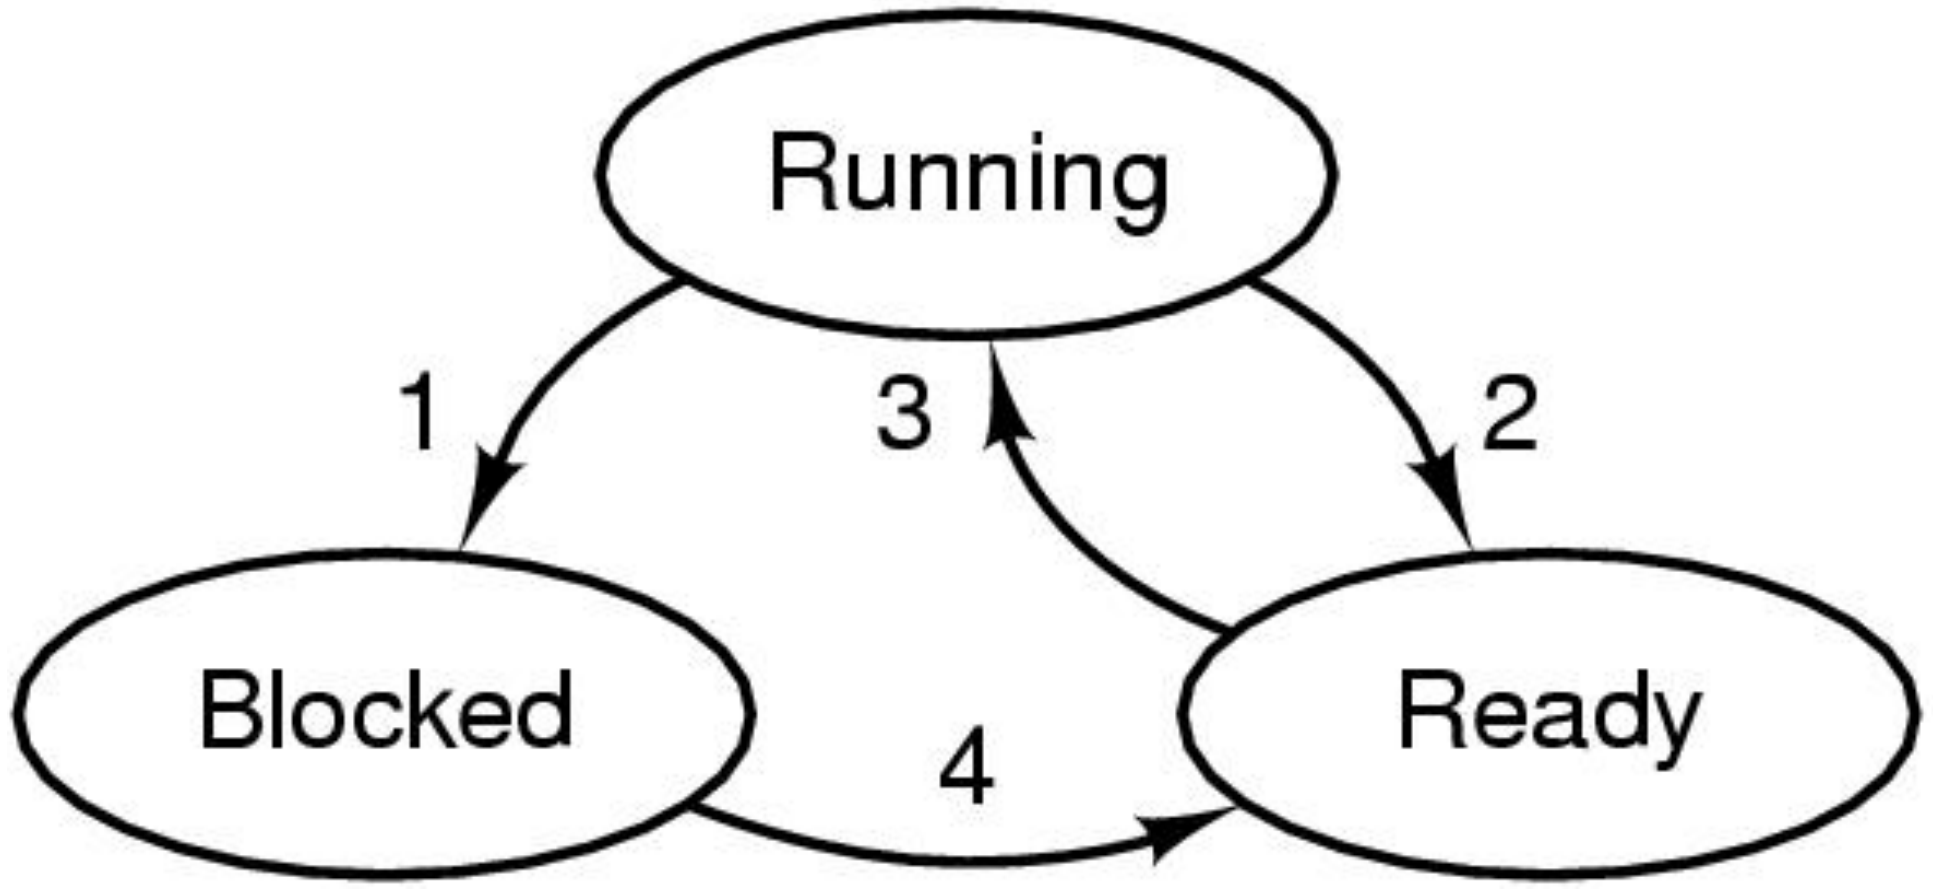

1. Process blocks for input
2. Scheduler picks another process
3. Scheduler picks this process
4. Input becomes available

Context Switch

- When CPU switches to another process, the system must **save the state** of the old process and load the **saved state** for the new process via a **context switch**

- **Context** of a process represented in the PCB

- Context-switch time is overhead; the system does no useful work while switching
  - The more complex the OS and the PCB -> longer the context switch

- Time dependent on hardware support
  - Some hardware provides multiple sets of registers per CPU -> multiple contexts loaded at once

Skeleton of Interrupt Handling by OS

1. Hardware stacks program counter, etc.
2. Hardware loads new program counter from interrupt vector.
3. Assembly language procedure saves registers.
4. Assembly language procedure sets up new stack.
5. C interrupt service runs (typically reads and buffers input).
6. Scheduler decides which process is to run next.
7. C procedure returns to the assembly code.
8. Assembly language procedure starts up new current process.

Scheduling Criteria

- **CPU utilization** – keep the CPU as busy as possible

- **Throughput** – # of processes that complete their execution per time unit

- **Turnaround time** – amount of time to execute a particular process

- **Waiting time** – amount of time a process has been waiting in the ready queue

Scheduling Algorithm Optimization Criteria

- Max CPU utilization
- Max throughput
- Min turnaround time
- Min waiting time
- Min response time

First-Come, First-Served (FCFS) Scheduling

Process	Burst Time
P_1	24
P_2	3
P_3	3

- Suppose that the processes arrive in the order: P_1 , P_2 , P_3
  The Gantt Chart for the schedule is:

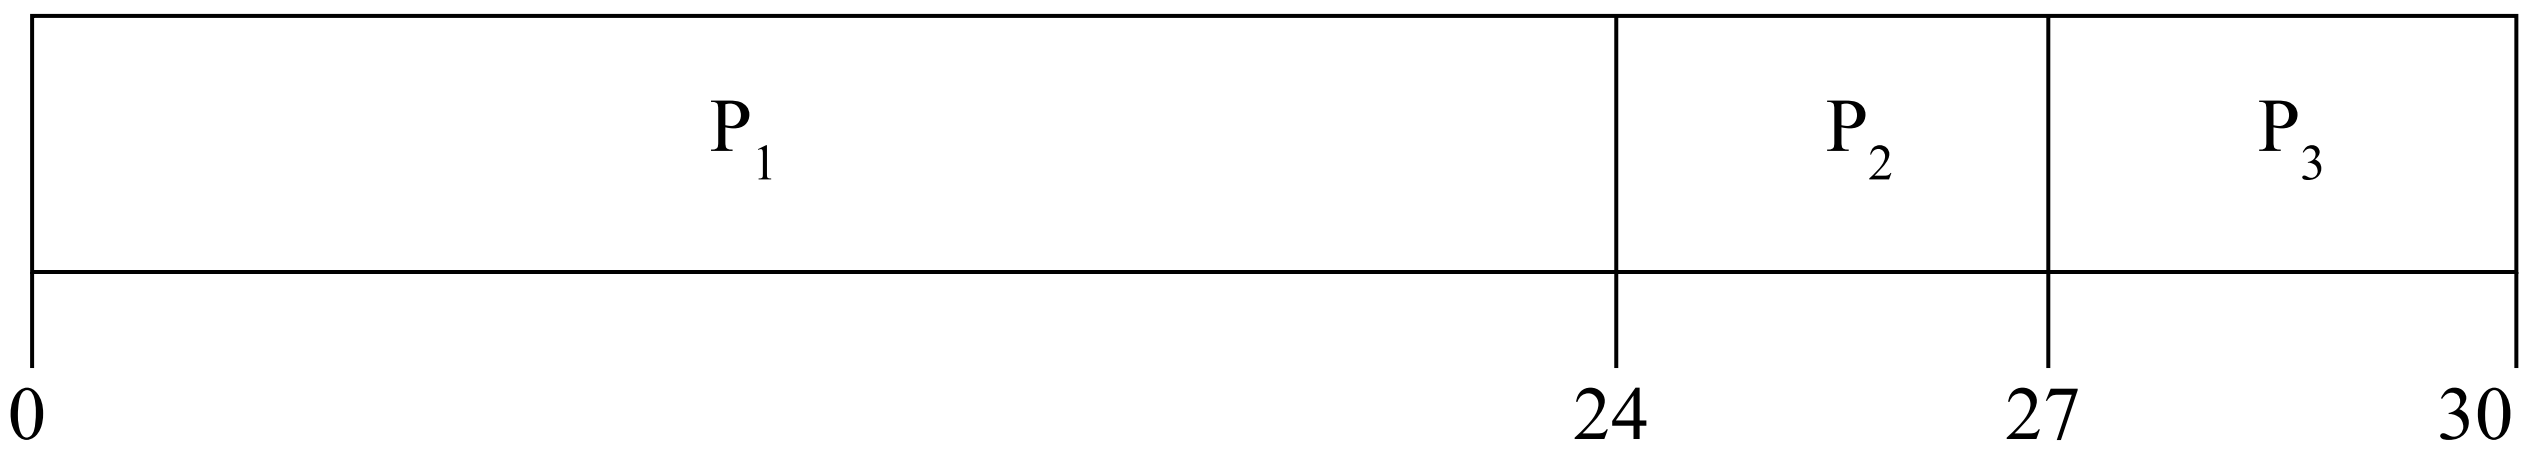

- Waiting time for P_1 = 0; P_2 = 24; P_3 = 27
- Average waiting time: (0 + 24 + 27)/3 = 17

Example of Shortest-remaining-time-first

- Now we add the concepts of varying arrival times and preemption to the analysis

Process	*Arrival* Time	Burst Time
P_1	0	8
P_2	1	4
P_3	2	9
P_4	3	5

- *Preemptive* SJF Gantt Chart

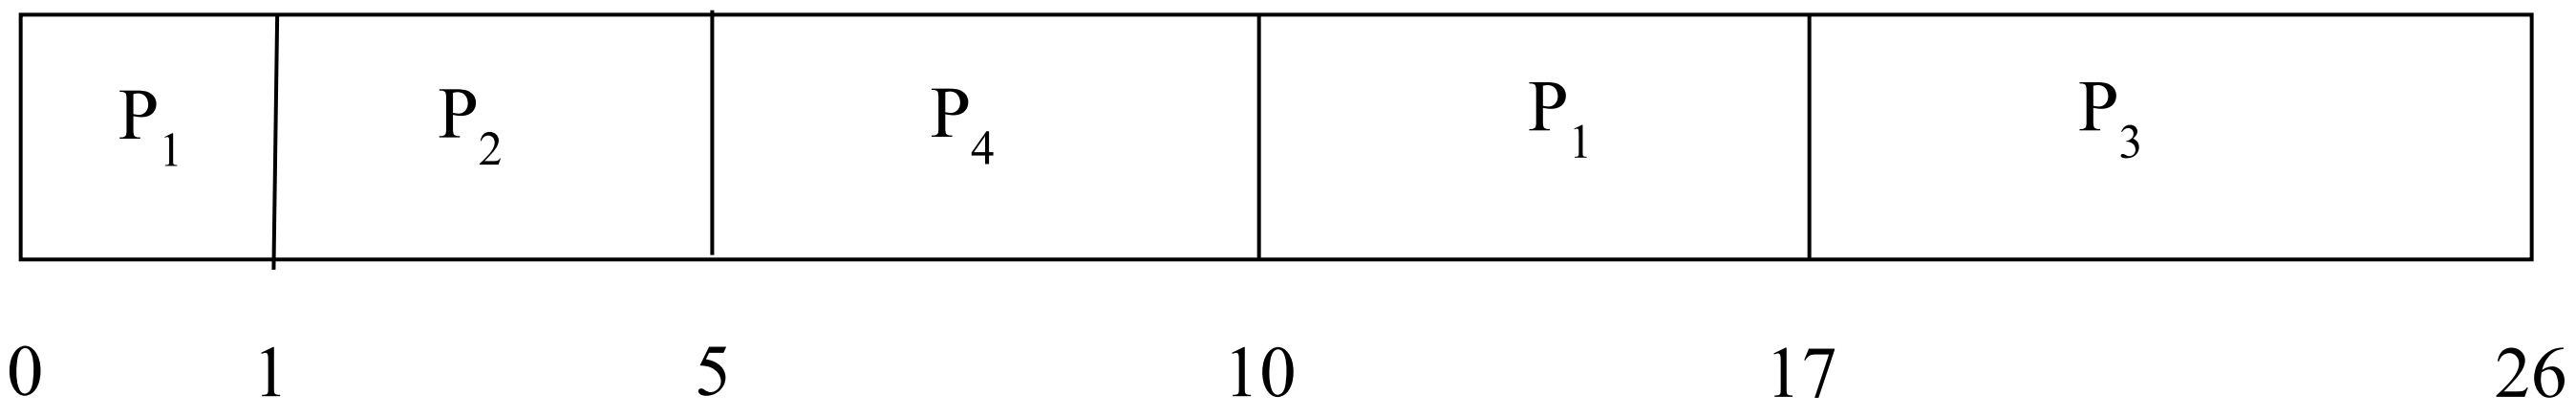

- Average waiting time = [(10-1)+(1-1)+(17-2)+5-3)]/4 = 26/4 = 6.5 msec

Round Robin (RR)

- Each process gets a small unit of CPU time (**time quantum** q), usually 10-100 milliseconds. After this time has elapsed, the process is *preempted* and added to the end of the ready queue.
- If there are n processes in the ready queue and the time quantum is q, then each process gets $1/n$ of the CPU time in chunks of at most q time units at once. No process waits more than $(n-1)q$ time units.
- Timer interrupts every quantum to schedule next process
- Performance
  - q large $\Rightarrow$ FIFO
  - q small $\Rightarrow$ q must be large with respect to context switch, otherwise overhead is too high

Example of RR with Time Quantum = 4

Process	Burst Time
P_1	24
P_2	3
P_3	3

- The Gantt chart is:

P_1	P_2	P_3	P_1	P_1	P_1	P_1	P_1

0 4 7 10 14 18 22 26 30

- Typically, higher average turnaround than SJF, but better ***response***
- q should be large compared to context switch time
- q usually 10ms to 100ms, context switch < 10 usec

Time Quantum and Context Switch Time

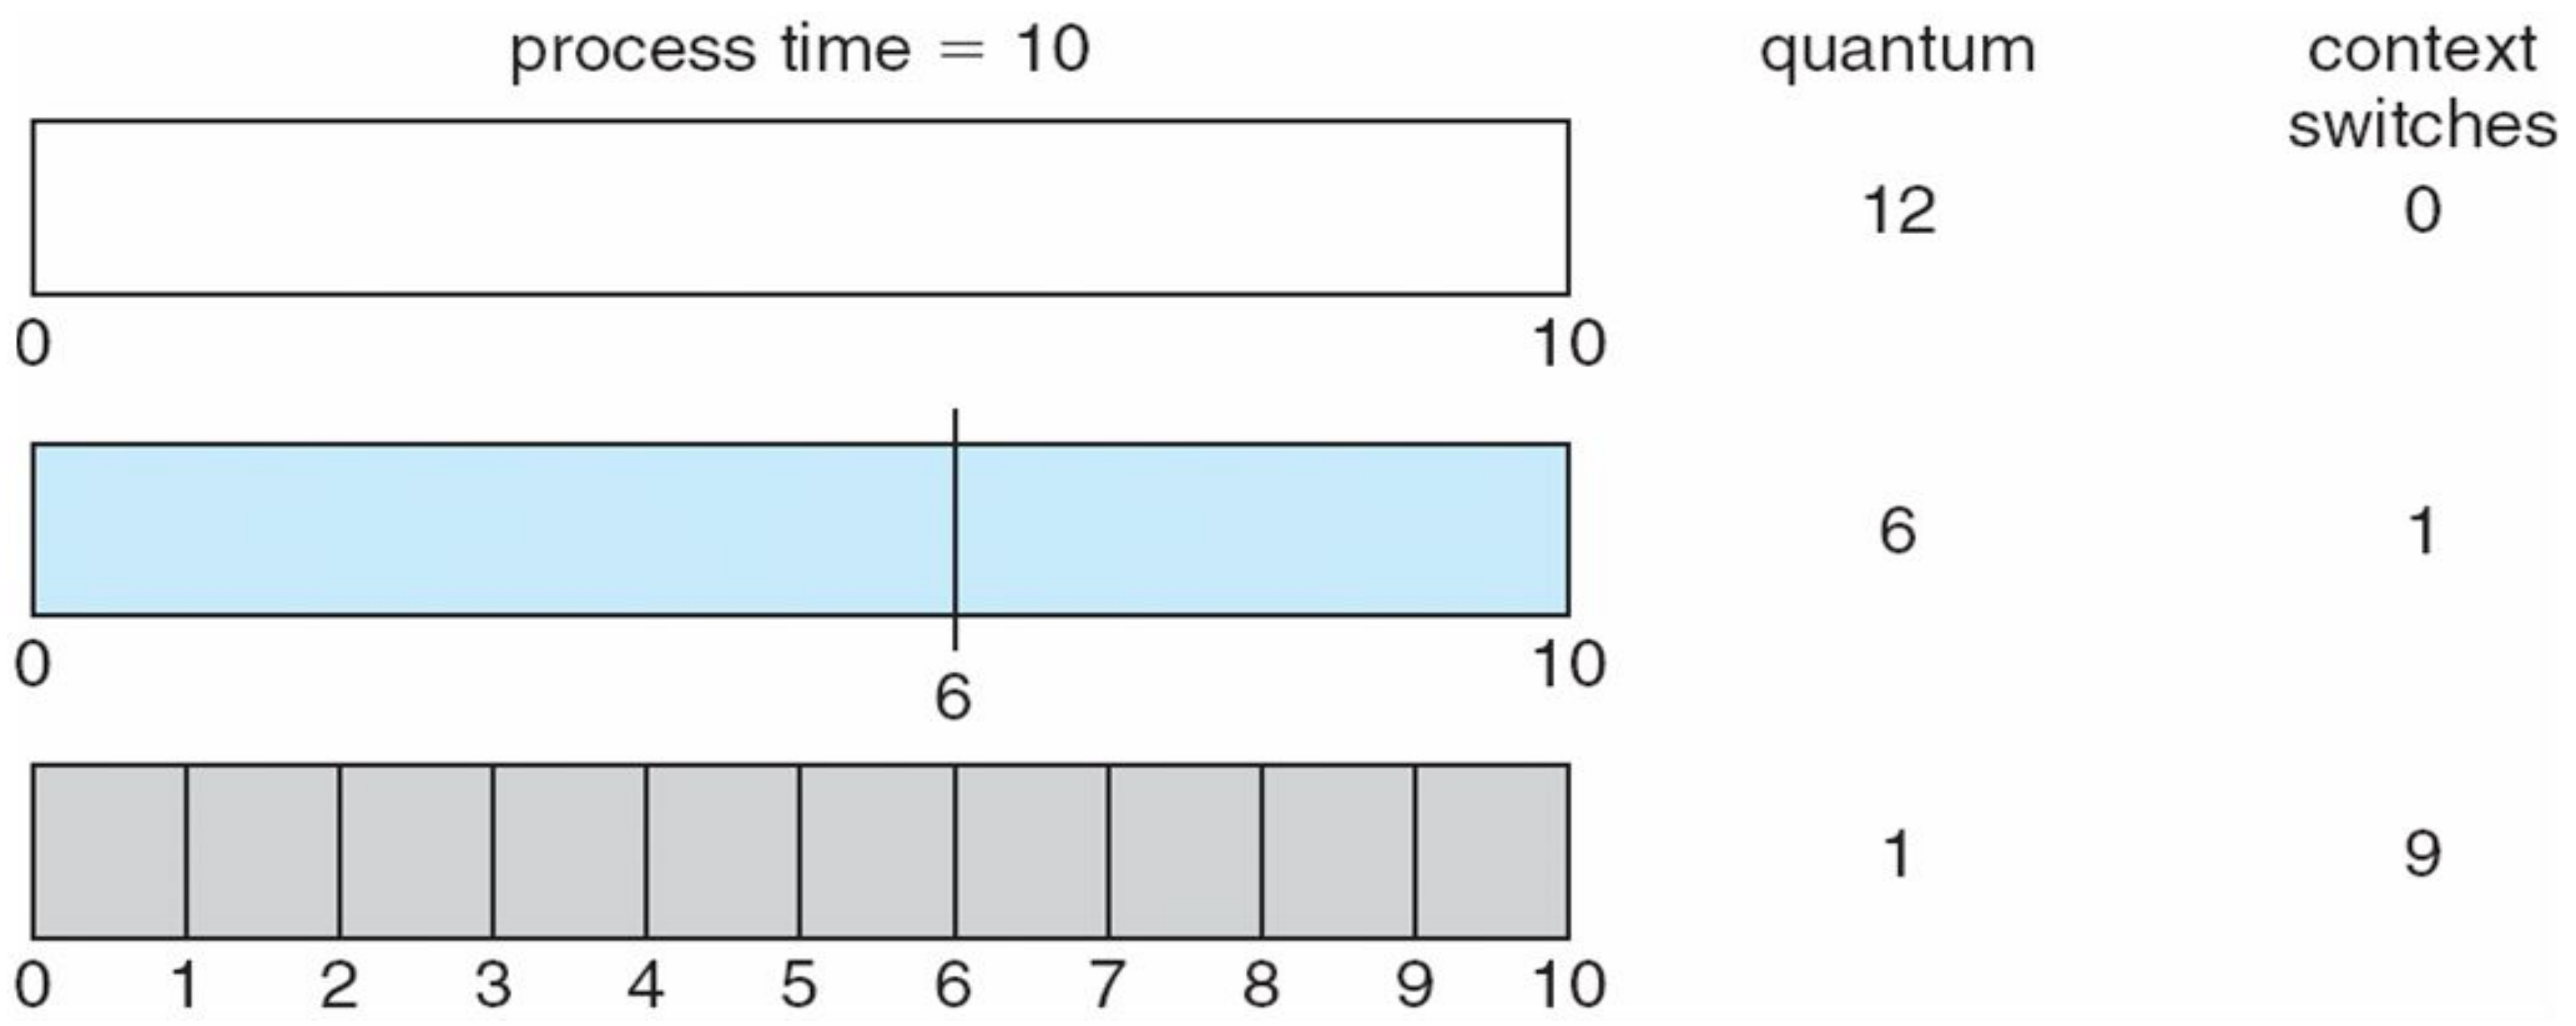

Example of RR with Time Quantum = 4

Process	Burst Time
P_1	24
P_2	3
P_3	3

- The Gantt chart is:

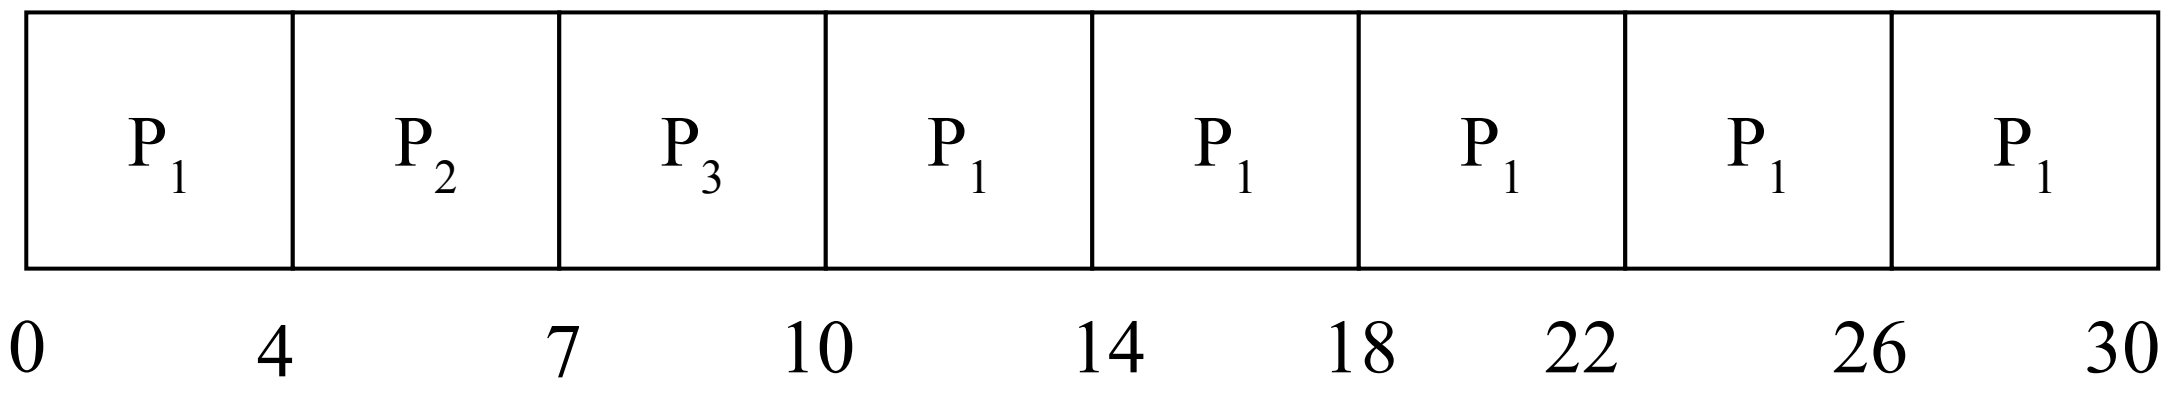

- Typically, higher average turnaround than SJF, but better ***response***
- q should be large compared to context switch time
- q usually 10ms to 100ms, context switch < 10 usec

Multilevel Queue

- Ready queue is partitioned into separate queues, eg:
  - **foreground** (interactive)
  - **background** (batch)
- Process permanently in a given queue
- Each queue has its own scheduling algorithm:
  - foreground – RR
  - background – FCFS
- Scheduling must be done between the queues:
  - Fixed priority scheduling; (i.e., serve all from foreground then from background). Possibility of starvation.
  - Time slice – each queue gets a certain amount of CPU time which it can schedule amongst its processes; i.e., 80% to foreground in RR
  - 20% to background in FCFS

Multilevel Queue Scheduling

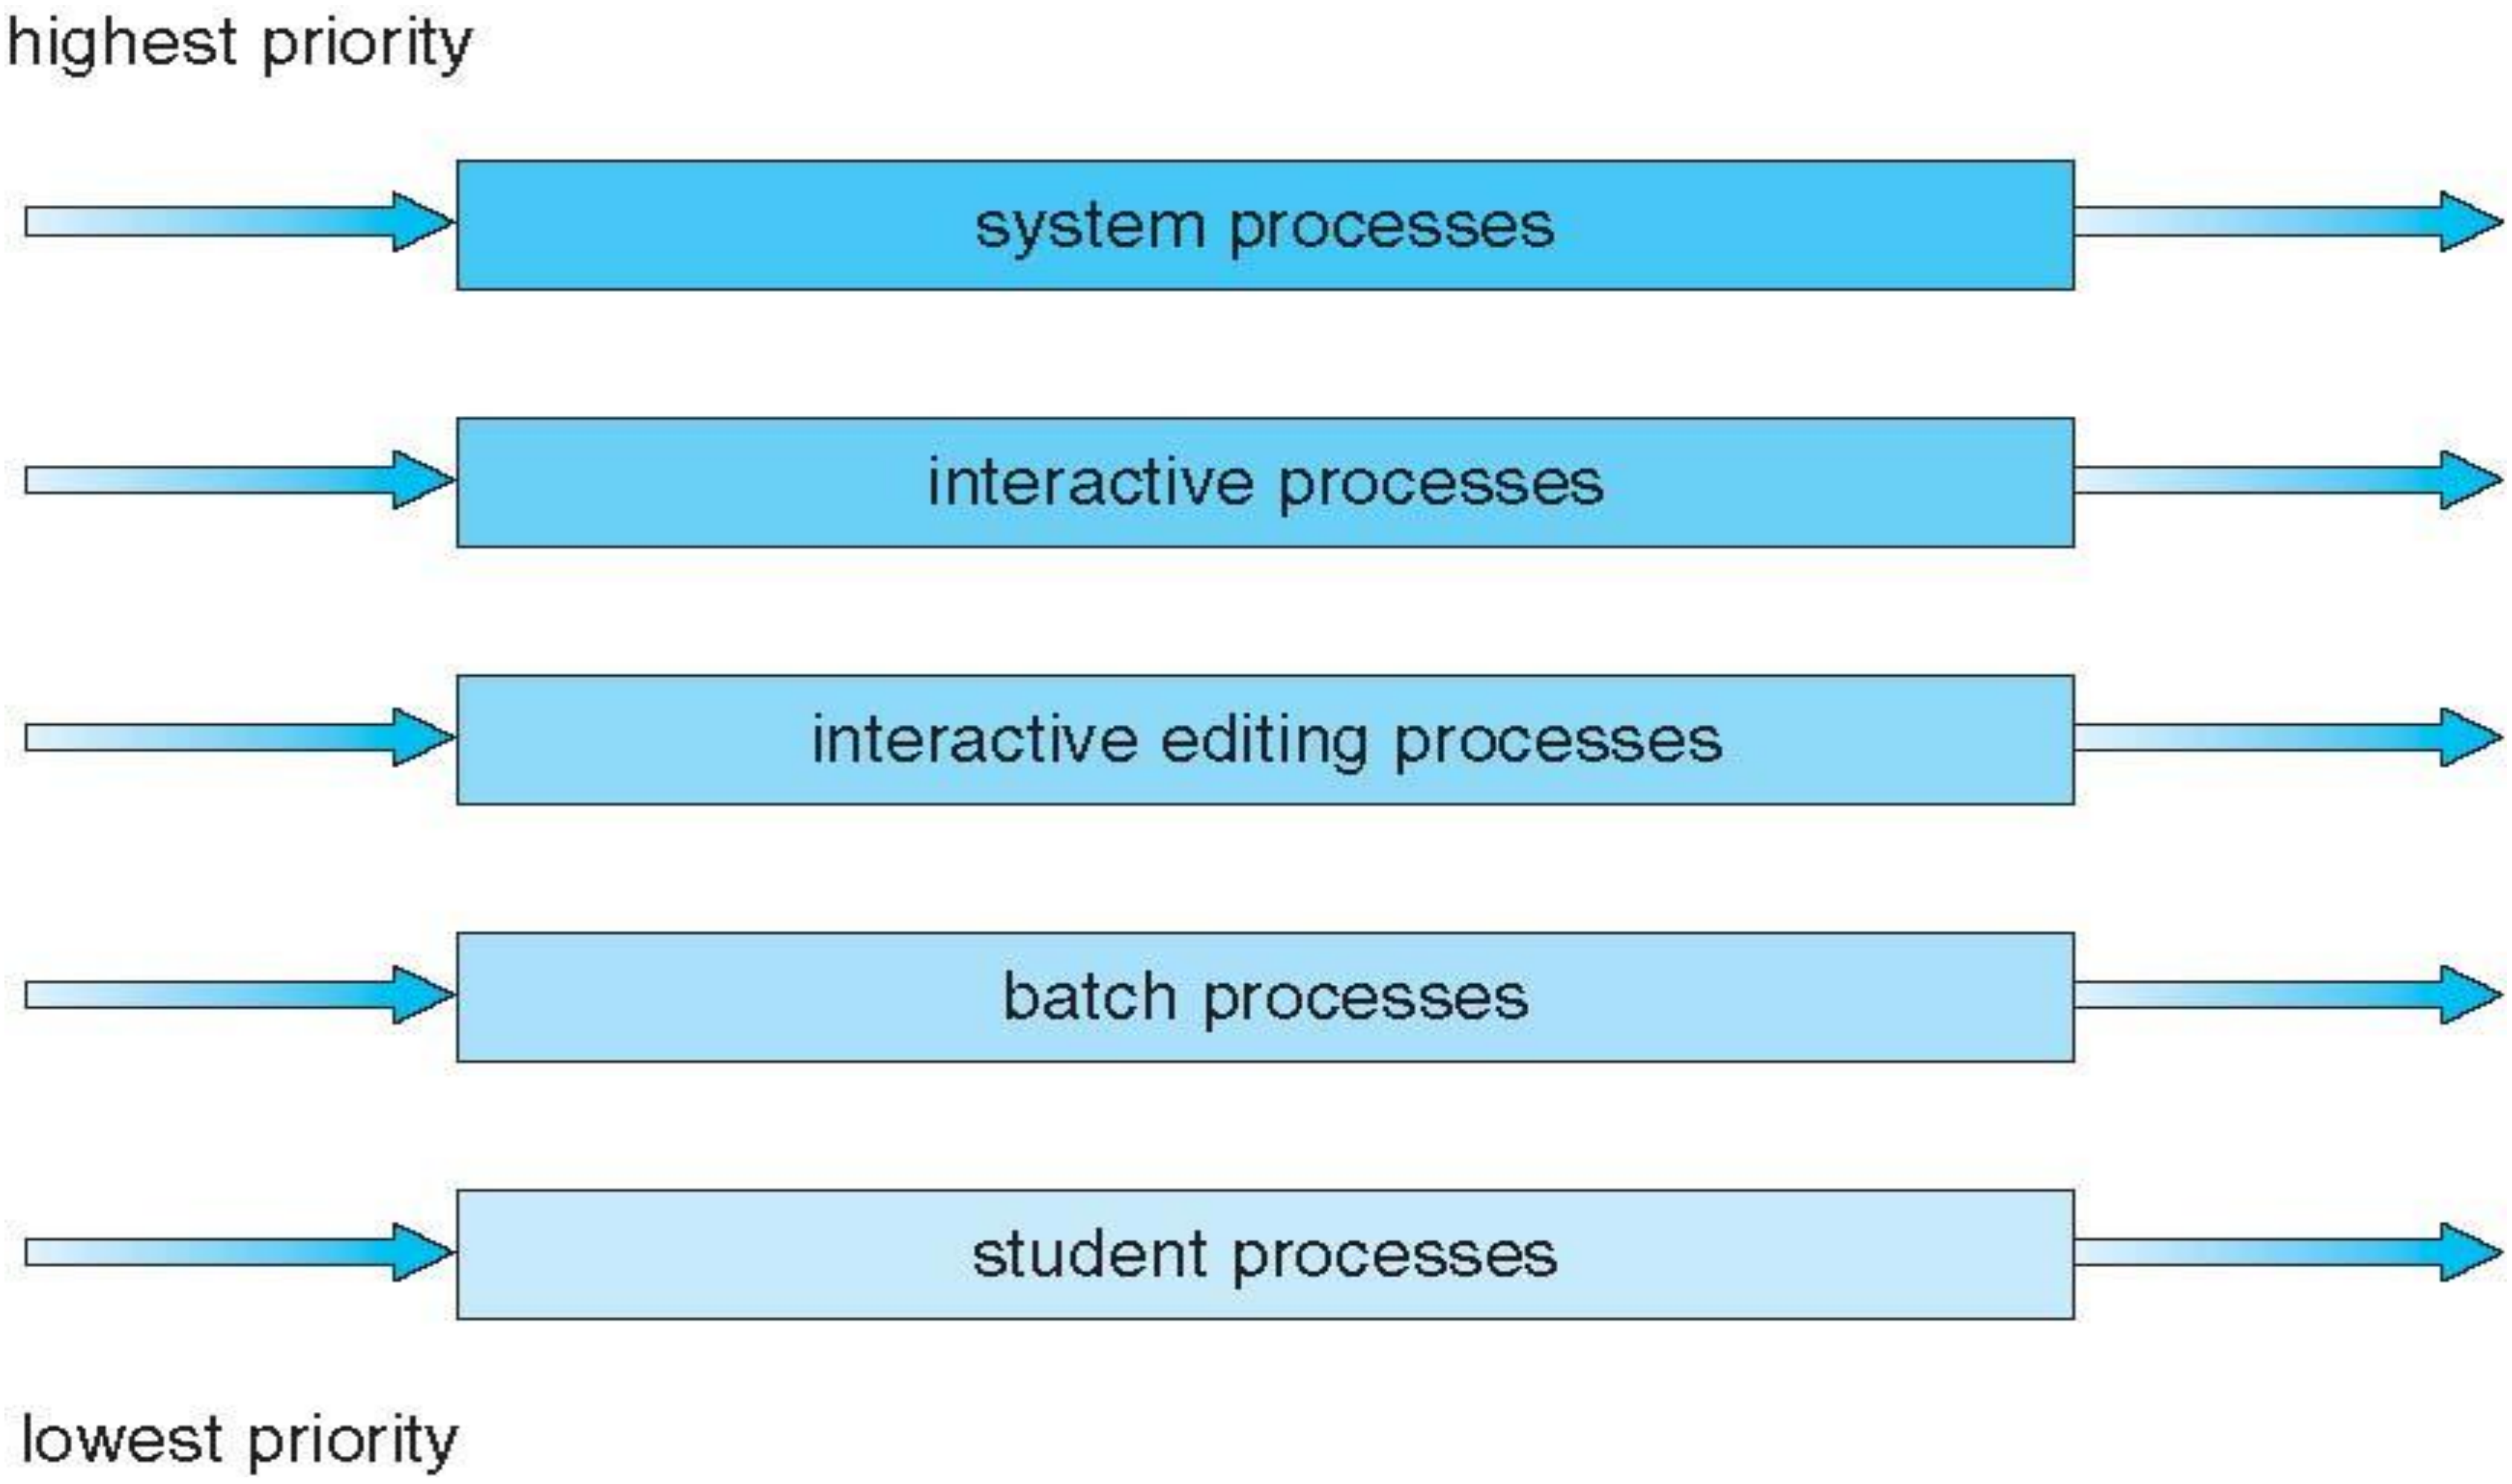

Multilevel Feedback Queue

- A process can move between the various queues; aging can be implemented this way
- Multilevel-feedback-queue scheduler defined by the following parameters:
  - number of queues
  - scheduling algorithms for each queue
  - method used to determine when to upgrade a process
  - method used to determine when to demote a process
  - method used to determine which queue a process will enter when that process needs service

Example of Multilevel Feedback Queue

- Three queues:
  - Q_0 – RR with time quantum 8 milliseconds
  - Q_1 – RR time quantum 16 milliseconds
  - Q_2 – FCFS

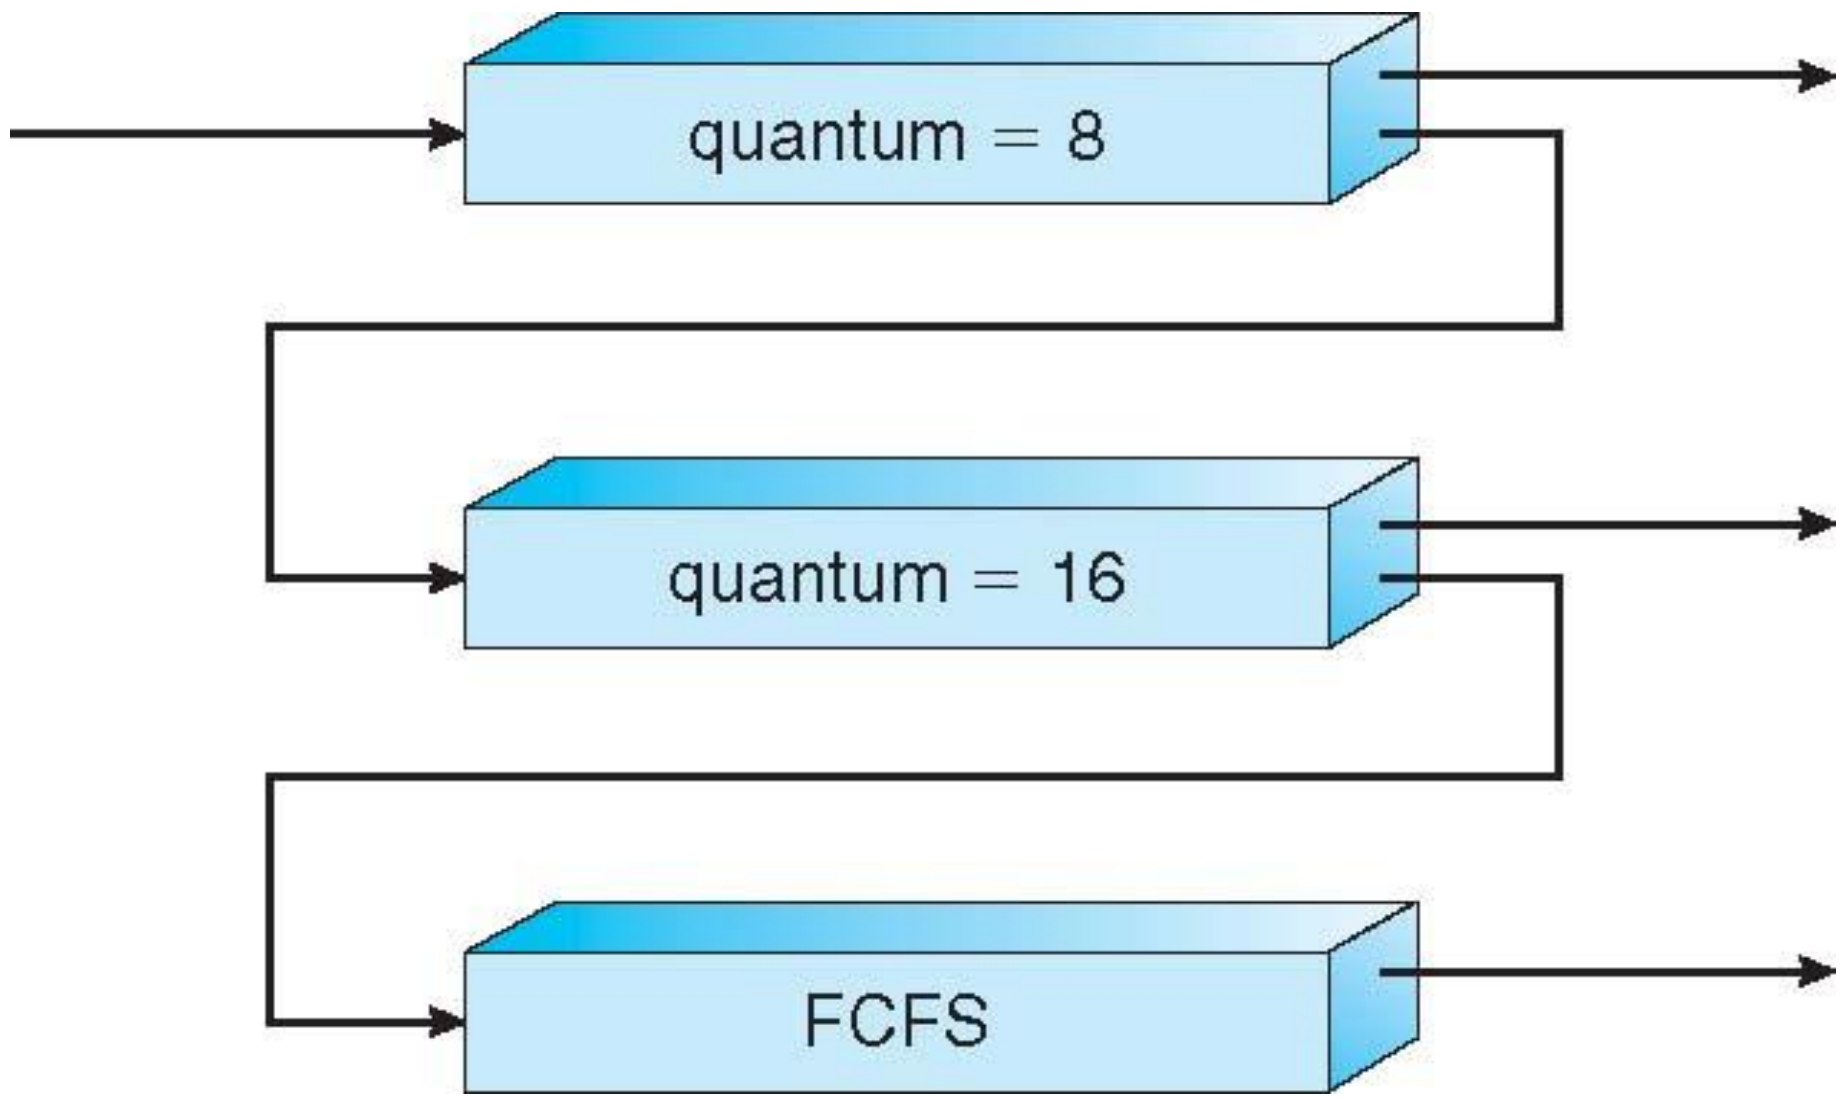

- Scheduling
  - A new job enters queue Q_0 which is served FCFS
    - When it gains CPU, job receives 8 milliseconds
    - If it does not finish in 8 milliseconds, job is moved to queue Q_1
  - At Q_1 job is again served FCFS and receives 16 additional milliseconds
    - If it still does not complete, it is preempted and moved to queue Q_2