

Breadboard pins




Pin header rows are 0.3" apart: the module straddles the breadboard centre channel.
Right-row GND pins sit between the B signals for a short return path at high speed.

Channel 1

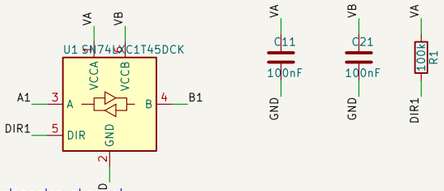


SN74LXC1T45: VCCA/VCCB 1.1..5.5 V, 420 Mbps, Ioff, VCC isolation.
DIR is referenced to VA; 100k pull-up makes an open DIR pin = A->B.


Channel 2

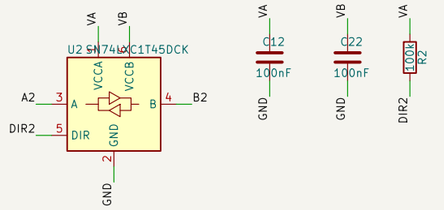

Channel 3

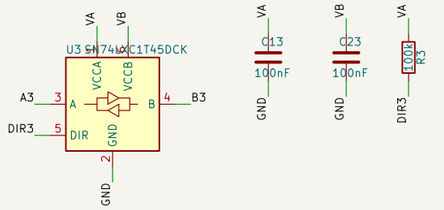

Channel 4

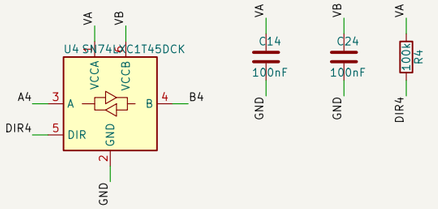



DIRn high/open = A->B, low = B->A (DIR referenced to VA)
VA/VB: 1.1 V .. 5.5 V each, independent
SN74LXC1T45 x4, fixed direction per channel (DIRn pin)

Sheet: /
File: lvl4.kicad_sch

Title: MultiVolt LVL4 — 4ch level translator

Size: A3	Date: 2026-10-31	**Rev: 1.0**
KiCad E.D.A. 10.0.7		Id: 1/1