

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.



The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU & 2015/863/EU for RoHS compliant and per IEC 61249-2-21 for Halogen-Free compliant.



ORIGINAL






REVISIONS			
SYM	ECN No.	DESCRIPTION	DATE
A	NE-14119	RELEASE TO PRODUCTION	06/20/2014
B	NE-14133	MODIFIED TAIL LENGTH	07/10/2014
C	NE-21115	UPDATE DRAWING/ADD PLATING & PK & TAIL OPTIONS/REMOVE NYLON/SHELL/SUS	2021-12-07

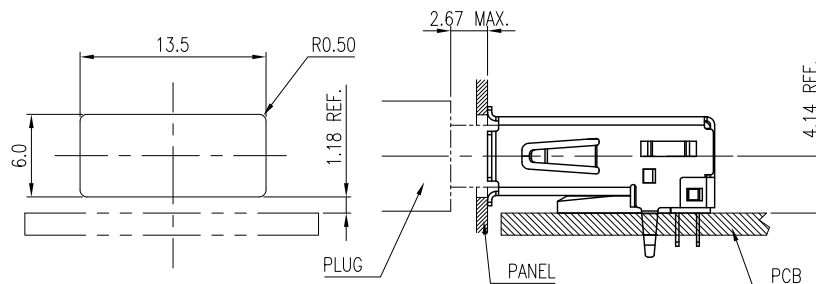

PIN #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND_DRAIN
8	SSTX-
9	SSTX+
SHELL	SHIELD

PIN ASSIGNMENT

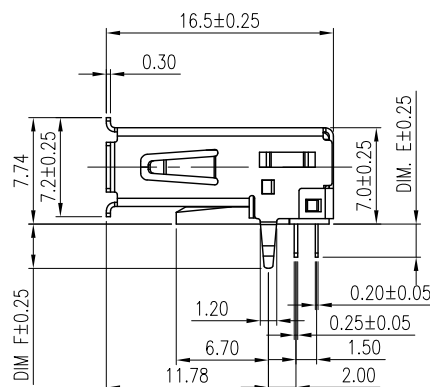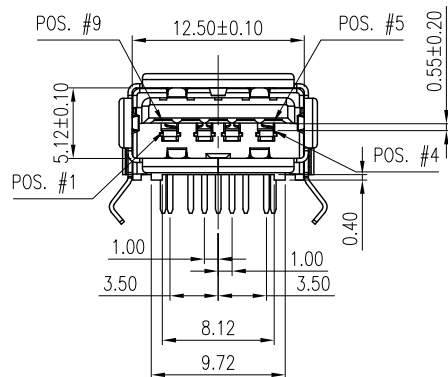


PART NUMBER:
GSB4 111 X X X HR

CONTACT FINISH
1: GOLD FLASH
2: 15μ" GOLD
3: 30μ" GOLD

INSULATOR AND COLOR
1: LCP, Blue
3: LCP, Black

OPTIONS	DIM. E	DIM. F	PACKING
2:	2.4	3.2	TRAY
3:	3.0	3.6	TRAY
4:	2.17	3.20	TRAY
5:	2.4	3.2	T&R
6:	3.0	3.6	T&R
7:	2.17	3.20	T&R

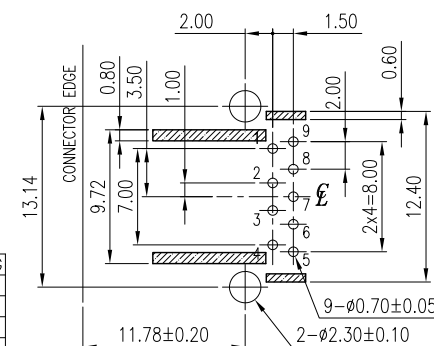

RECOMMENDED PCB LAYOUT- TOP VIEW
(OTHER GENERAL TOLERANCES: ±0.05)

NOTES:

- HOUSING: HIGH TEMPERATURE THERMOPLASTIC OPTIONS UL 94V-0 COLOR-OPTIONS
- BOTTOM COVER: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0, COLOR:OPTIONS
- CONTACT: COPPER ALLOY, U2 0.25mm/U3 0.20mm THICKNESS, SELECTIVE GOLD PLATING ON CONTACT AREA, 120μ" MIN. MATTE TIN PLATED ON SOLDERING TAIL, 80μ" MIN. NICKEL UNDER-PLATED OVERALL
- METAL SHELL: STAINLESS STEEL, 0.3mm THICKNESS, 50μ" MIN. NICKEL UNDER-PLATED OVERALL
- THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2011/65/EU & 2015/863/EU FOR RoHS COMPLIANT. AND PER IEC 61249-2-21 FOR HALOGEN-FREE COMPLIANT.
- P/N: GSB41113XXXHR PRODUCT SPECIFICATION REFER TO: PS-7530
P/N: GSB41111XXXHR/GSB41112XXXHR PRODUCT SPECIFICATION REFER TO: PS-7539

TOLERANCE	APPROVALS	DATE	TITLE		PART No.	
X.	DRAWN	Debby Hung	USB 3.2 GEN2 CONNECTOR		GSB4111XXXHR	
X.X ±0.30	CHECKED	Sandy Wu	STANDARD A		Amphenol Corporation	
X.XX ±0.20	APPROVED	Roger Tsai	R/A DIP TYPE		Amphenol Taiwan Corporation	
X.XXX ±0.10	DWG TYPE	CUST DWG	UNIT mm		SHEET 1 OF 3	
ANGULAR ±1°	PROJECT CODE	OTHER	SCALE NA		REV. C	
UNLESS OTHERWISE SPECIFIED						


The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU & 2015/863/EU for RoHS compliant and per IEC 61249-2-21 for Halogen-Free compliant.



ORIGINAL





REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
A	NE-14119	RELEASE TO PRODUCTION	06/20/2014	Sandra Sano
B	NE-14133	MODIFIED TAIL LENGTH	07/10/2014	Sandra Sano
C	NE-21115	UPDATE DRAWING/ADD PLATING & PK & TAIL OPTIONS/REMOVE NYLON/SHELL/SUS	2021-12-07	Debby Hung

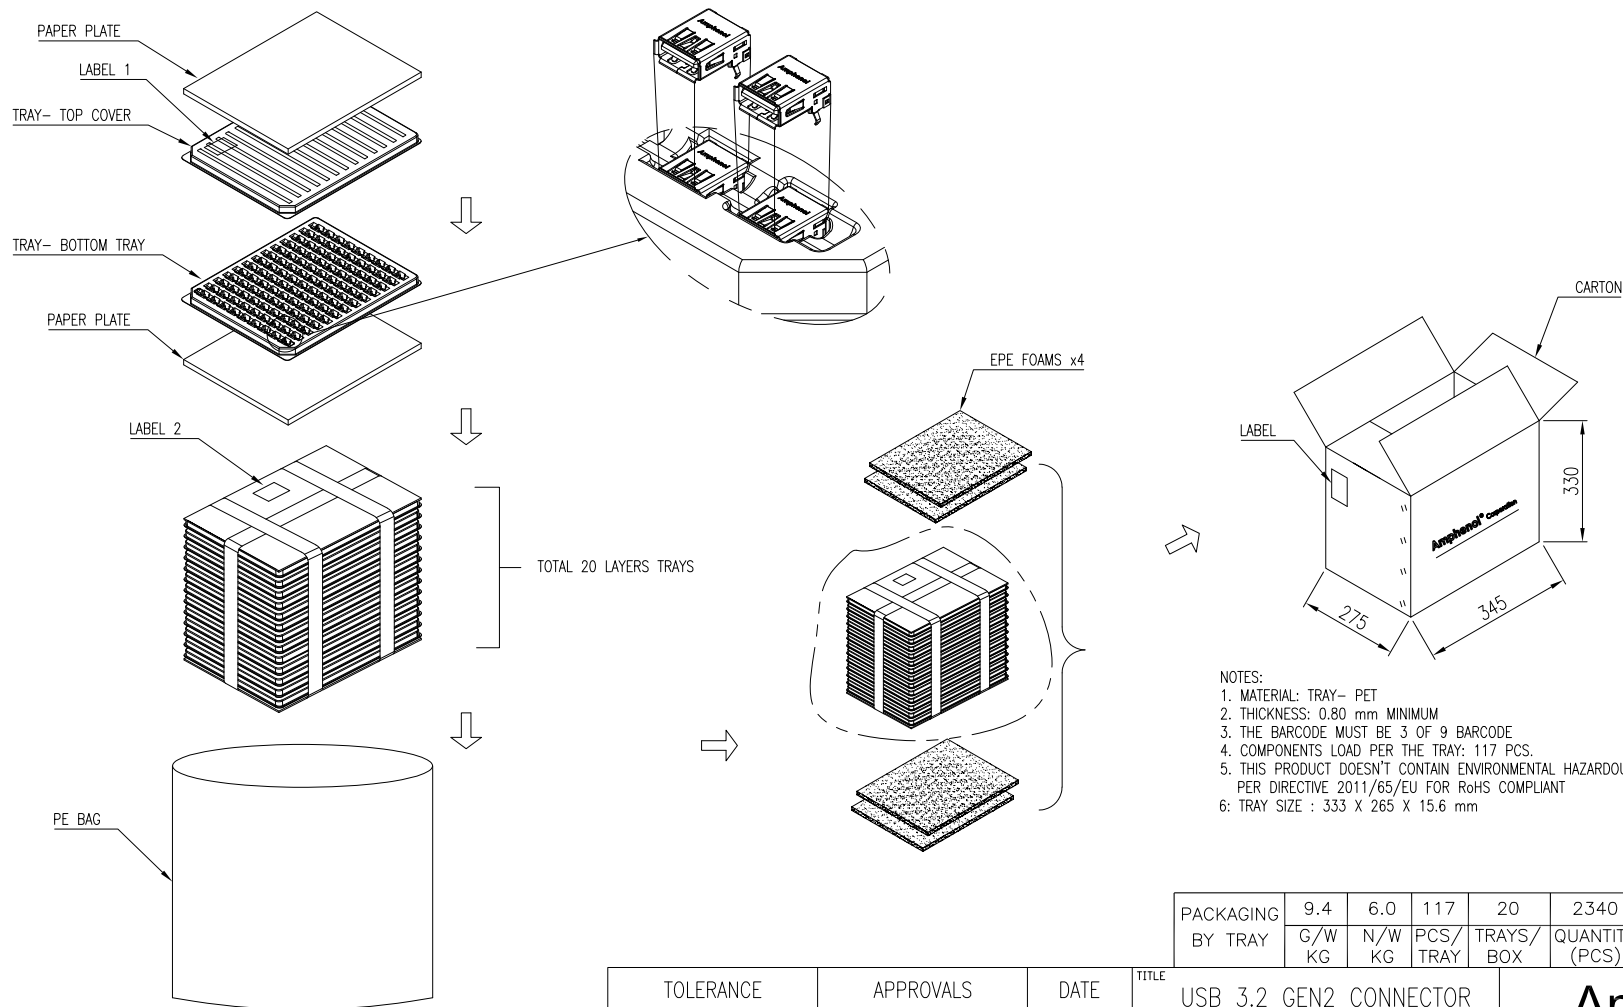

NOTES:

1. MATERIAL: TRAY- PET
2. THICKNESS: 0.80 mm MINIMUM
3. THE BARCODE MUST BE 3 OF 9 BARCODE
4. COMPONENTS LOAD PER THE TRAY: 117 PCS.
5. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS.
PER DIRECTIVE 2011/65/EU FOR RoHS COMPLIANT
6. TRAY SIZE : 333 X 265 X 15.6 mm

TOLERANCE		APPROVALS		DATE		TITLE		USB 3.2 GEN2 CONNECTOR		Amphenol® Amphenol Corporation Amphenol Taiwan Corporation	
X. X.X ±0.30 X.XX ±0.20 X.XXX ±0.10		DRAWN Debby Hung		2021-12-07				STANDARD A R/A DIP TYPE			
		CHECKED Sandy Wu		2021-12-07							
		APPROVED Roger Tsai		2021-12-07							
ANGULAR ±1°								UNIT mm	SIZE A3	PART No. GSB4111XXXHR	
UNLESS OTHERWISE SPECIFIED		DWG TYPE CUST DWG		PROJECT CODE OTHER				SCALE NA	SHEET 2 OF 3	DWG No. GSB4111XXXHR	REV. C

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.




The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU & 2015/863/EU for RoHS compliant and per IEC 61249-2-21 for Halogen-Free compliant.



ORIGINAL




REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	BY
A	NE-14119	RELEASE TO PRODUCTION	06/20/2014	Sondra Sang
B	NE-14133	MODIFIED TAIL LENGTH	07/10/2014	Sondra Sang
C	NE-21115	UPDATE DRAWING/ADD PLATING & PK & TAIL OPTIONS/REMOVE NYLON/SHELLSUS	2021-12-07	Debby Hung

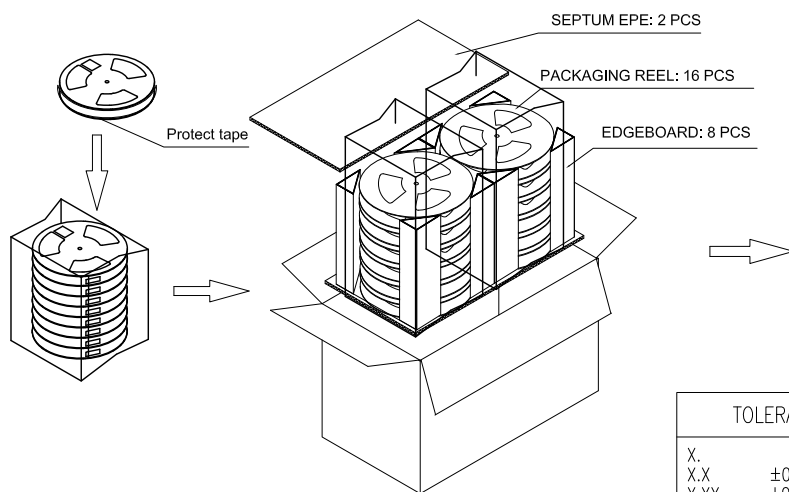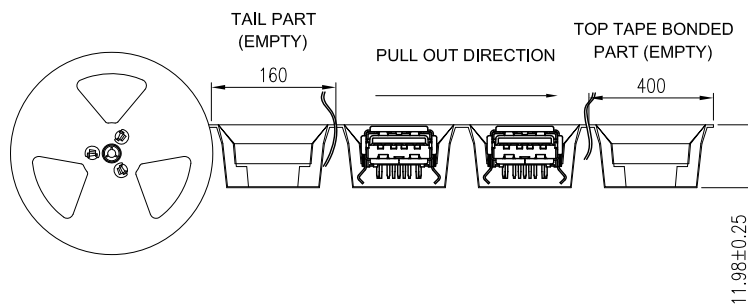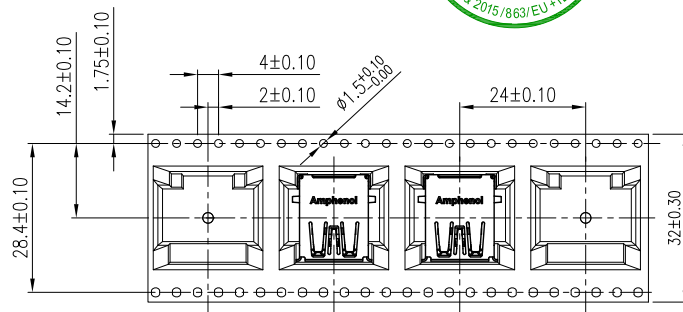


REEL SIZE	PARTS PER CARTON<S.P.Q>	PARTS PER REEL	TOTEL REEL PER CARTON
ø330	3520	220	16

NOTES:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON. ALL CARTON CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING TRAYS WITH THE QUANTITIES AS INDICATED IN THE CHART.
3. SHIPPING CARTON DIMENSION: 690 X 360 X 325mm.
4. NET WEIGHT: 8.0 KG.
GROSS WEIGHT: 14.4 KG.



TOLERANCE		APPROVALS		DATE	TITLE USB 3.2 GEN2 CONNECTOR STANDARD A R/A DIP TYPE			Amphenol® Amphenol Corporation Amphenol Taiwan Corporation		
X.		DRAWN	Debby Hung	2021-12-07						
X.X	±0.30	CHECKED	Sandy Wu	2021-12-07						
X.XX	±0.20									
X.XXX	±0.10									
ANGULAR		±1°	Roger Tsai		2021-12-07		UNIT mm	SIZE A3	PART No. GSB4111XXXHR	
UNLESS OTHERWISE SPECIFIED		DWG TYPE CUST DWG	PROJECT CODE OTHER				SCALE NA	SHEET 3 OF 3	DWG No. GSB4111XXXHR	REV. C