


USB AND RP2040 USB-C for programming and data; BOOTSEL held at reset enters the USB boot loader

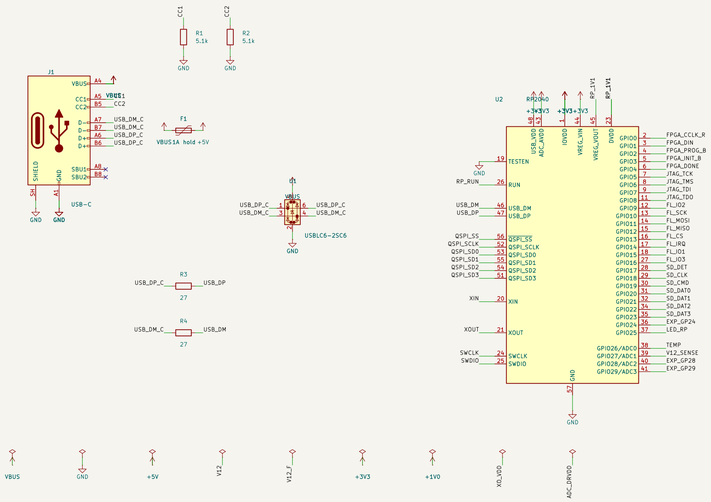

FPGA XC7A35T-FTG256; loaded by the RP2040 (slave serial, M[2:0] = 111) or over JTAG

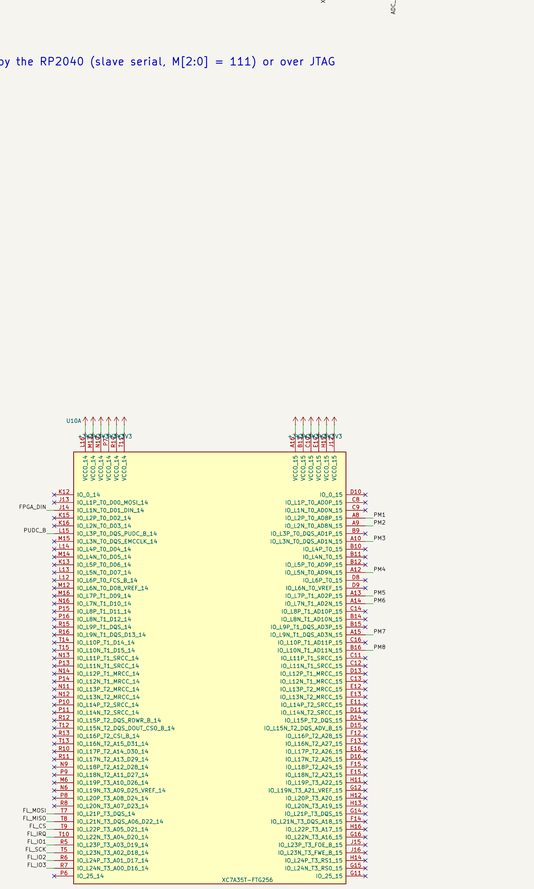


OUTPUTS, HEADERS, INDICATORS

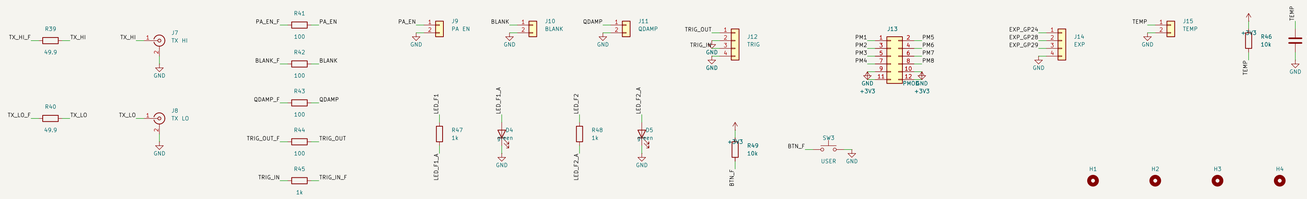


microSD SPI or 4-bit SDIO; holds FPGA bitstreams and scan results


POWER logic from USB 5 V; ADC analogue rail from the 12 V system supply

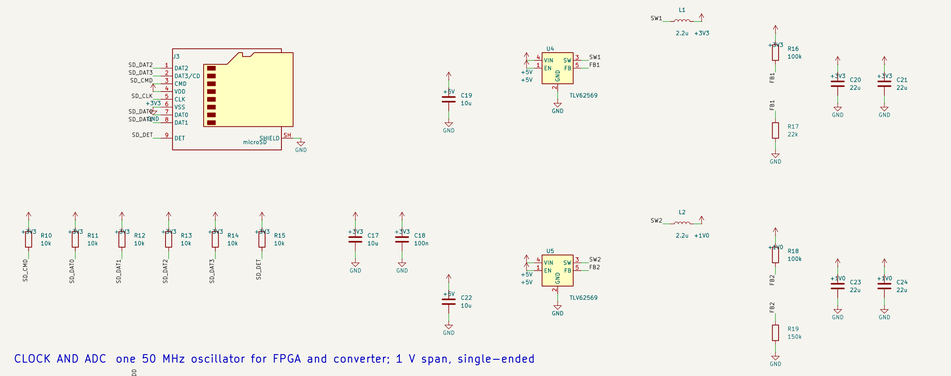

CLOCK AND ADC one 50 MHz oscillator for FPGA and converter; 1 V span, single-ended

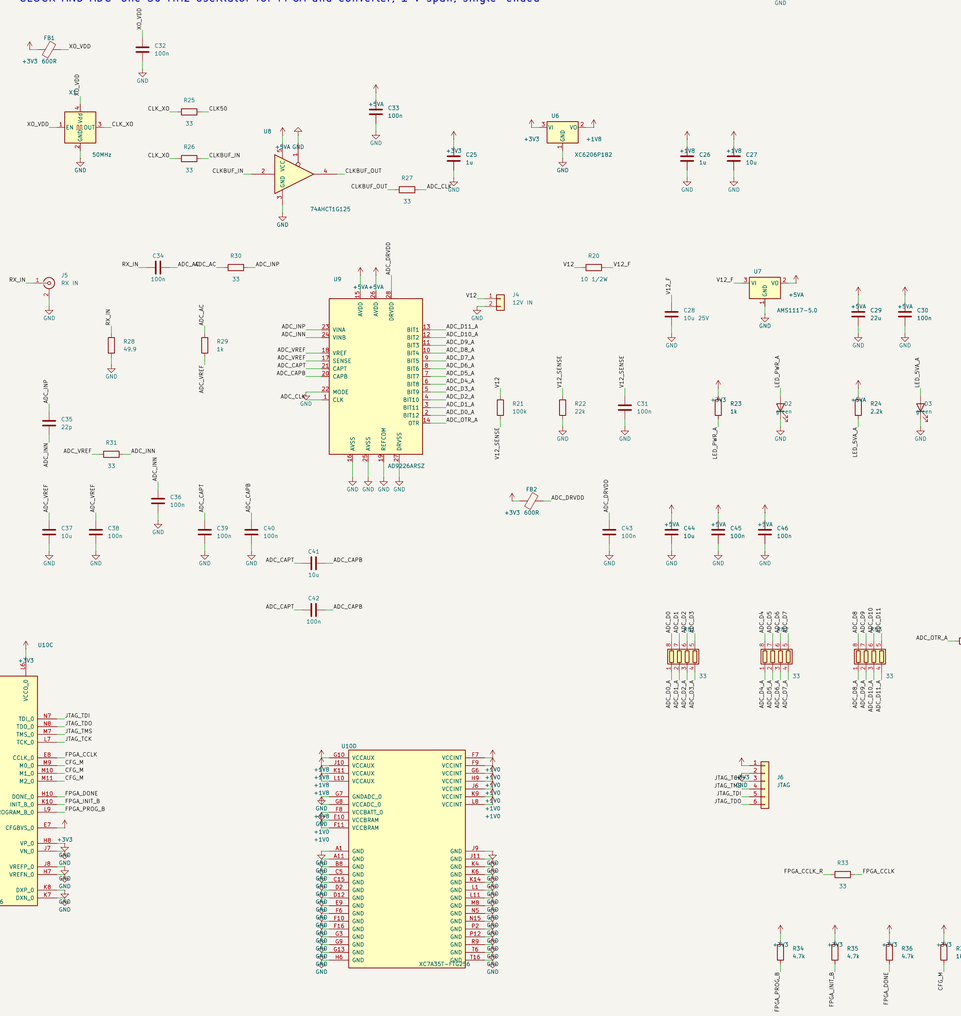

FPGA decoupling (0402 under the package)

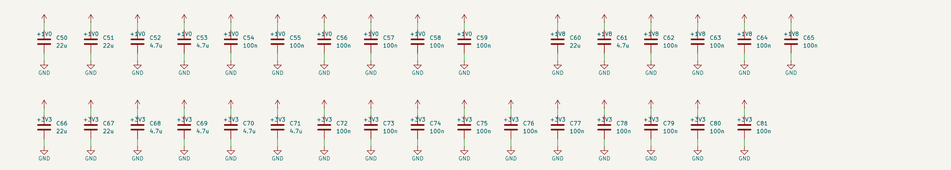

scandev
Sheet: /
File: dig.kicad_sch

Title: NQR digital board

Size: A1	Date:
KiCad E.D.A. 10.0.3	Rev: A
	Id: 1/1