


SUPPLY 12 V in (9–15 V), passed on to the receive front end; bridge rail fed through 110 ohm

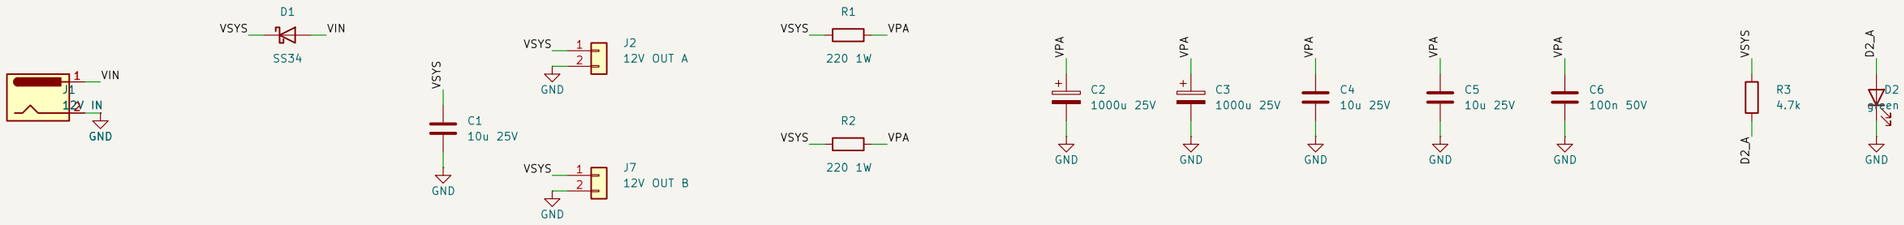

DRIVER inputs idle low and the driver is disabled unless EN is driven high

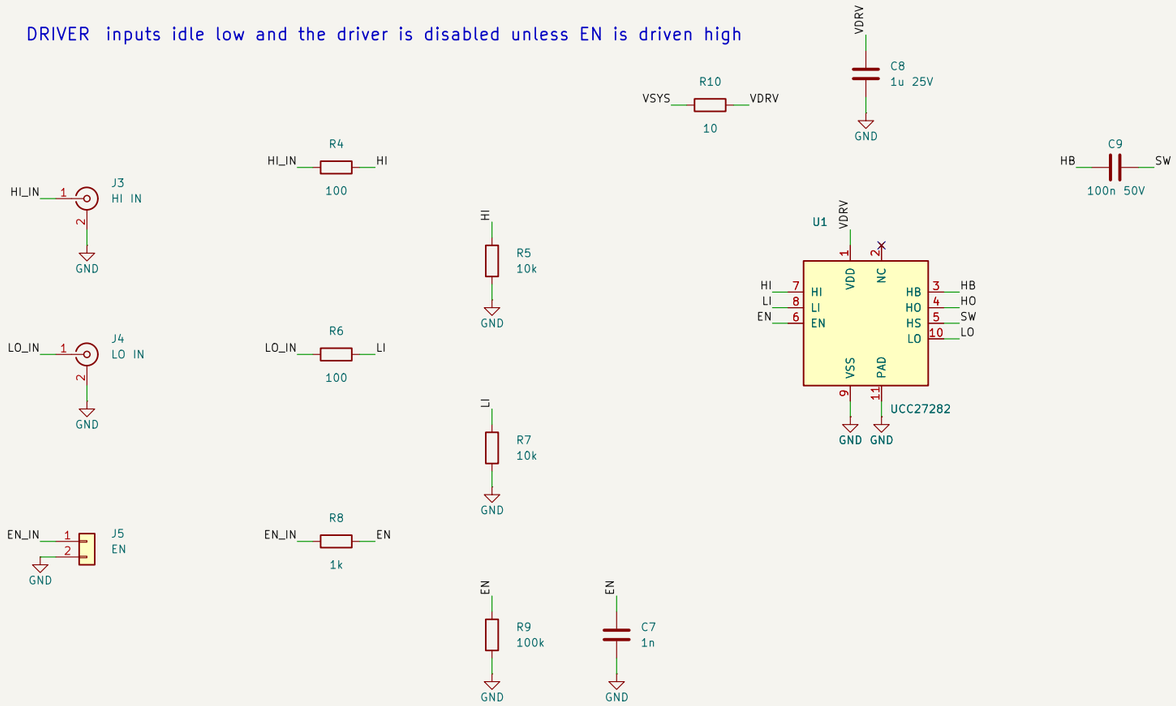

BRIDGE AND OUTPUT NETWORK

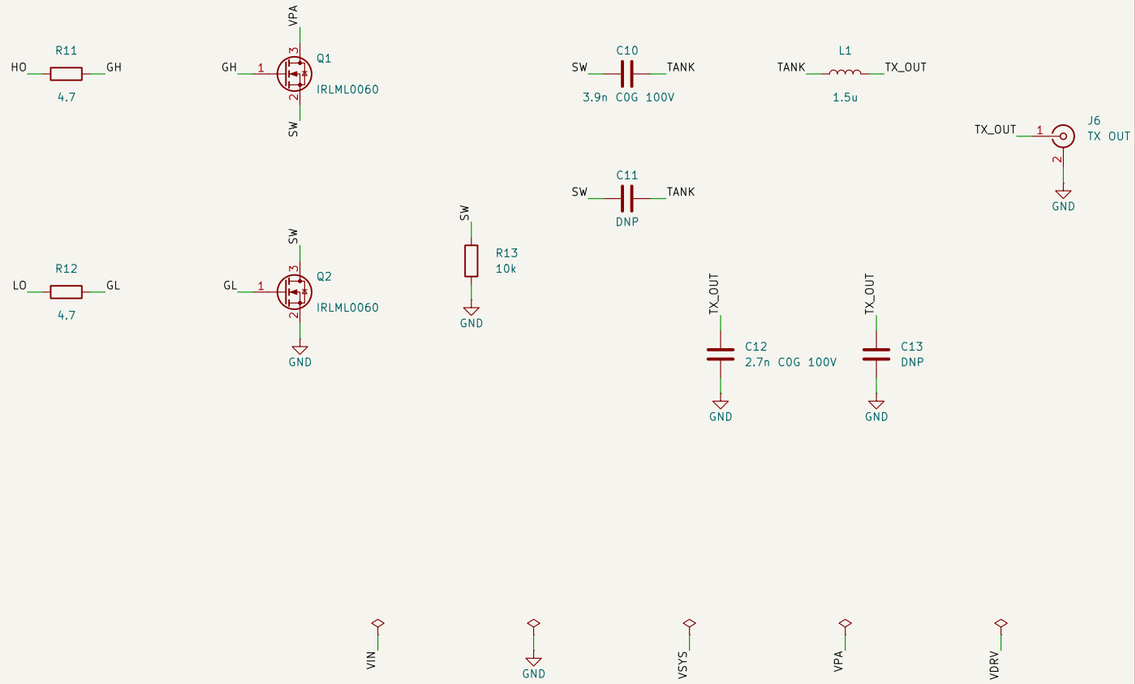

H1 H2 H3 H4

VIN GND VSYS VPA VDRV

scandev		
Sheet: /		
File: pa.kicad_sch		
Title: NQR transmit amplifier		
Size: A3	Date:	**Rev: A**
KiCad E.D.A. 10.0.3		Id: 1/1