


TRANSMIT ISOLATOR series crossed diodes pass the pulse, block amplifier noise afterwards

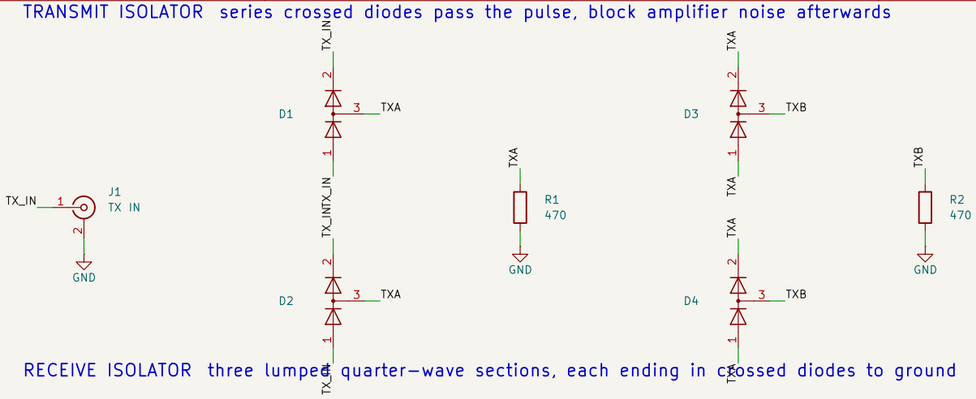


RECEIVE ISOLATOR three lumped quarter-wave sections, each ending in crossed diodes to ground

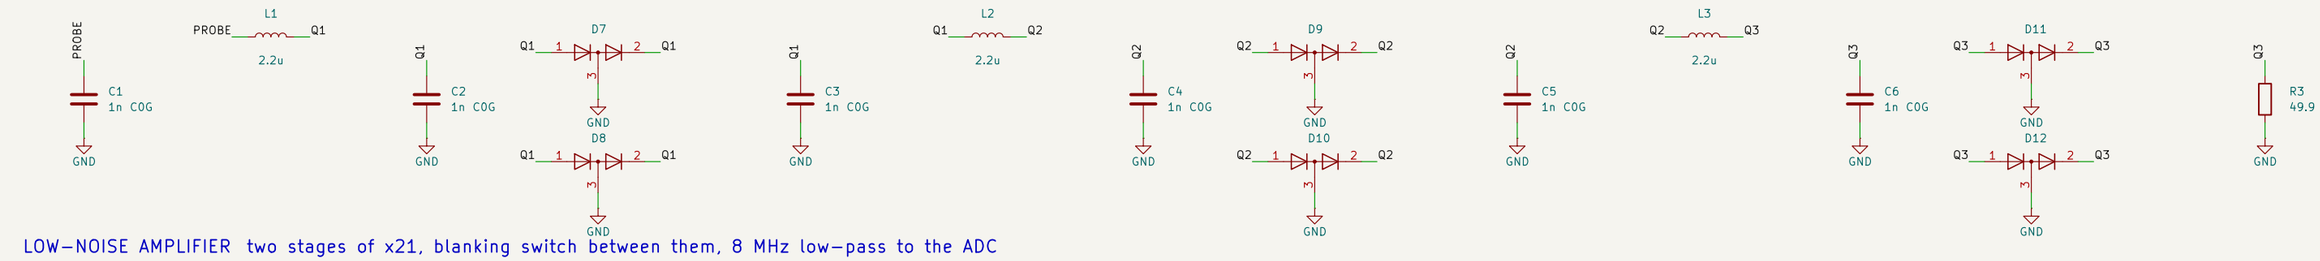

LOW-NOISE AMPLIFIER two stages of x21, blanking switch between them, 8 MHz low-pass to the ADC

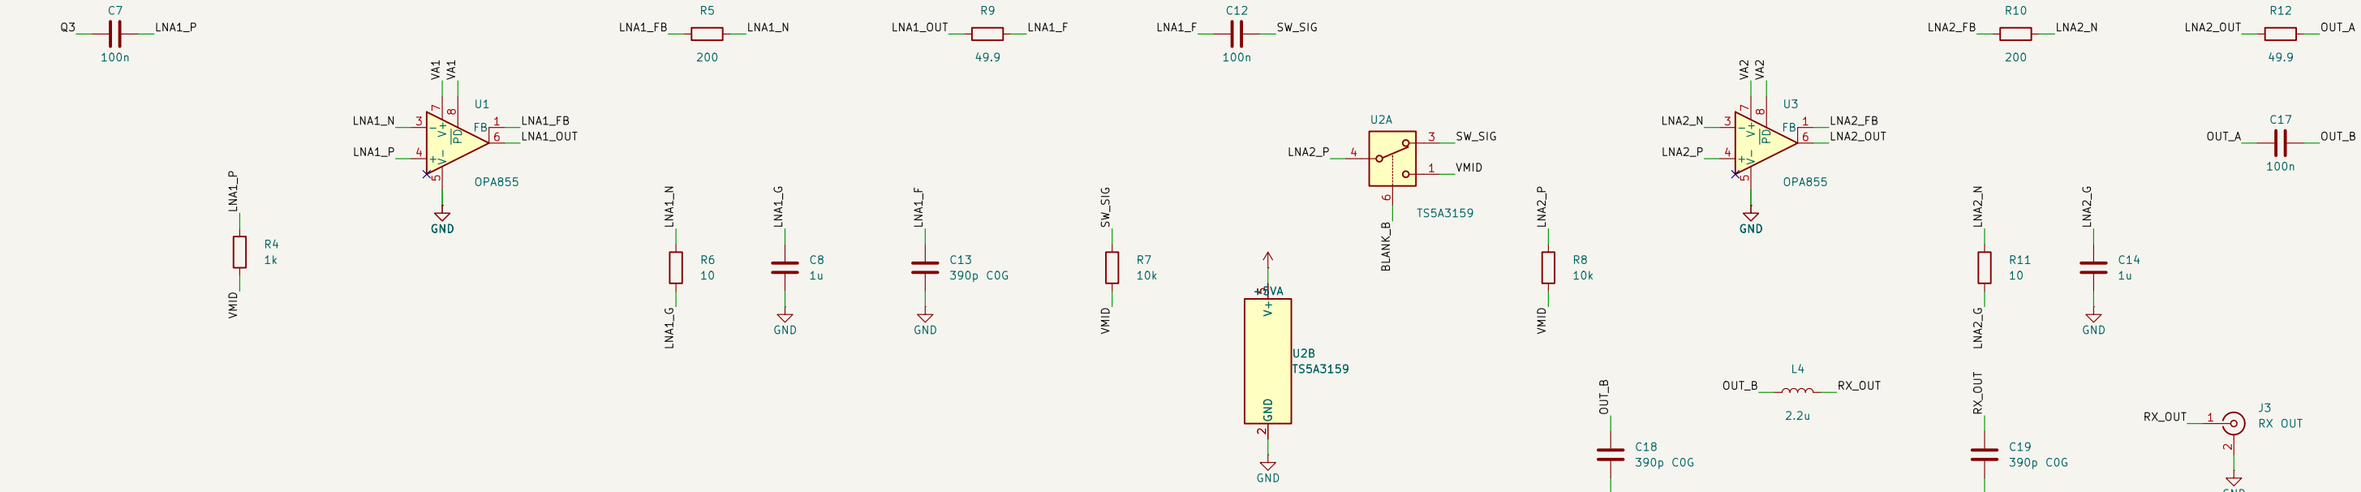

POWER AND CONTROL 7-16 V in, 5 V low-noise regulator, mid-rail reference, blanking input

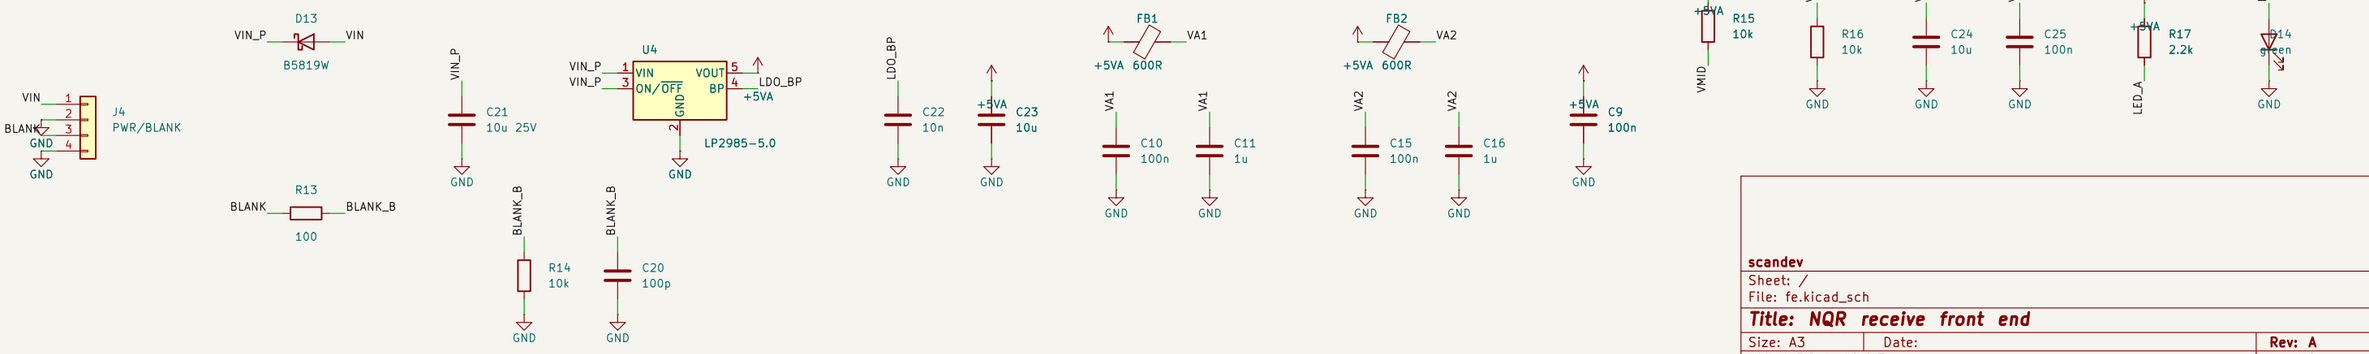

scandev		
Sheet: /		
File: fe.kicad_sch		
Title: NQR receive front end		
Size: A3	Date:	**Rev: A**
KiCad E.D.A. 10.0.3		Id: 1/1