


DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

# LT 428

## Component Digital Sync Generator

### Instructions for Production

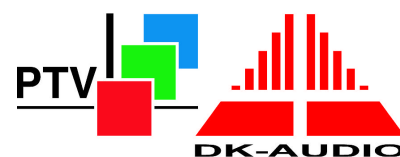

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>			Doc. No.	
Prep. by: GBg	Checked by:	Approved by:	<b>9449 652 01001</b>	Page 1 of 14
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:


## Content

CONTENT.....	2
PRODUCTION PROCESS OVERVIEW .....	3
RESPONSIBILITIES .....	4
TEST AND ADJUSTMENT PROCESS .....	5
TEST AND ADJUSTMENT PROGRAM FOR LT428 COMPONENT DIGITAL SYNC GENERATOR. ....	6
Introduction.....	6
Power Supply Check. ....	6
Reset Sync Pulse Generator.....	6
Adjust 13 MHz TCXO. ....	6
Calibration of Genlock Color Framing. ....	6
Check Genlock. ....	7
Black Burst Generator Adjustment. ....	7
TSG Luminance Calibration. ....	7
TSG Timing Adjustment. ....	7
TSG Pattern Check. ....	7
SDI Jitter and Amplitude Spectrum Check. ....	8
SDI Embedded Audio Check.....	8
Analog Audio Level Calibration. ....	8
Analog Audio Frequency Check.....	8
AES Audio Generator Test.....	8
AES Audio Level Check. ....	8
Word Clock Output Test. ....	8
APPENDIX A.....	9
List of Test Instruments .....	9
APPENDIX B.....	10
Summary of accuracies and nominal values .....	10
FINAL MOUNTING AND SAFETY INSPECTION .....	11
Internal mechanical checks .....	11
Mounting of top cover.....	11
Safety tests.....	11
PACKING INSTRUCTIONS FOR LT428.....	12
Serial Number .....	12
Warning Label .....	12
Mains Supply Label .....	12
Accessories .....	13
Box Labels .....	13
Box Sealing and Shipment Boxes .....	13
SPARE PARTS .....	14
Parts for Board Swapping and Mechanical Repairs .....	14

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428                      Component Digital Sync Generator</b>				
Prep. by: GBg	Checked by:	Approved by:	Doc. No. <b>9449 652 01001</b>	Page <b>2 of 14</b>
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

## Production Process Overview

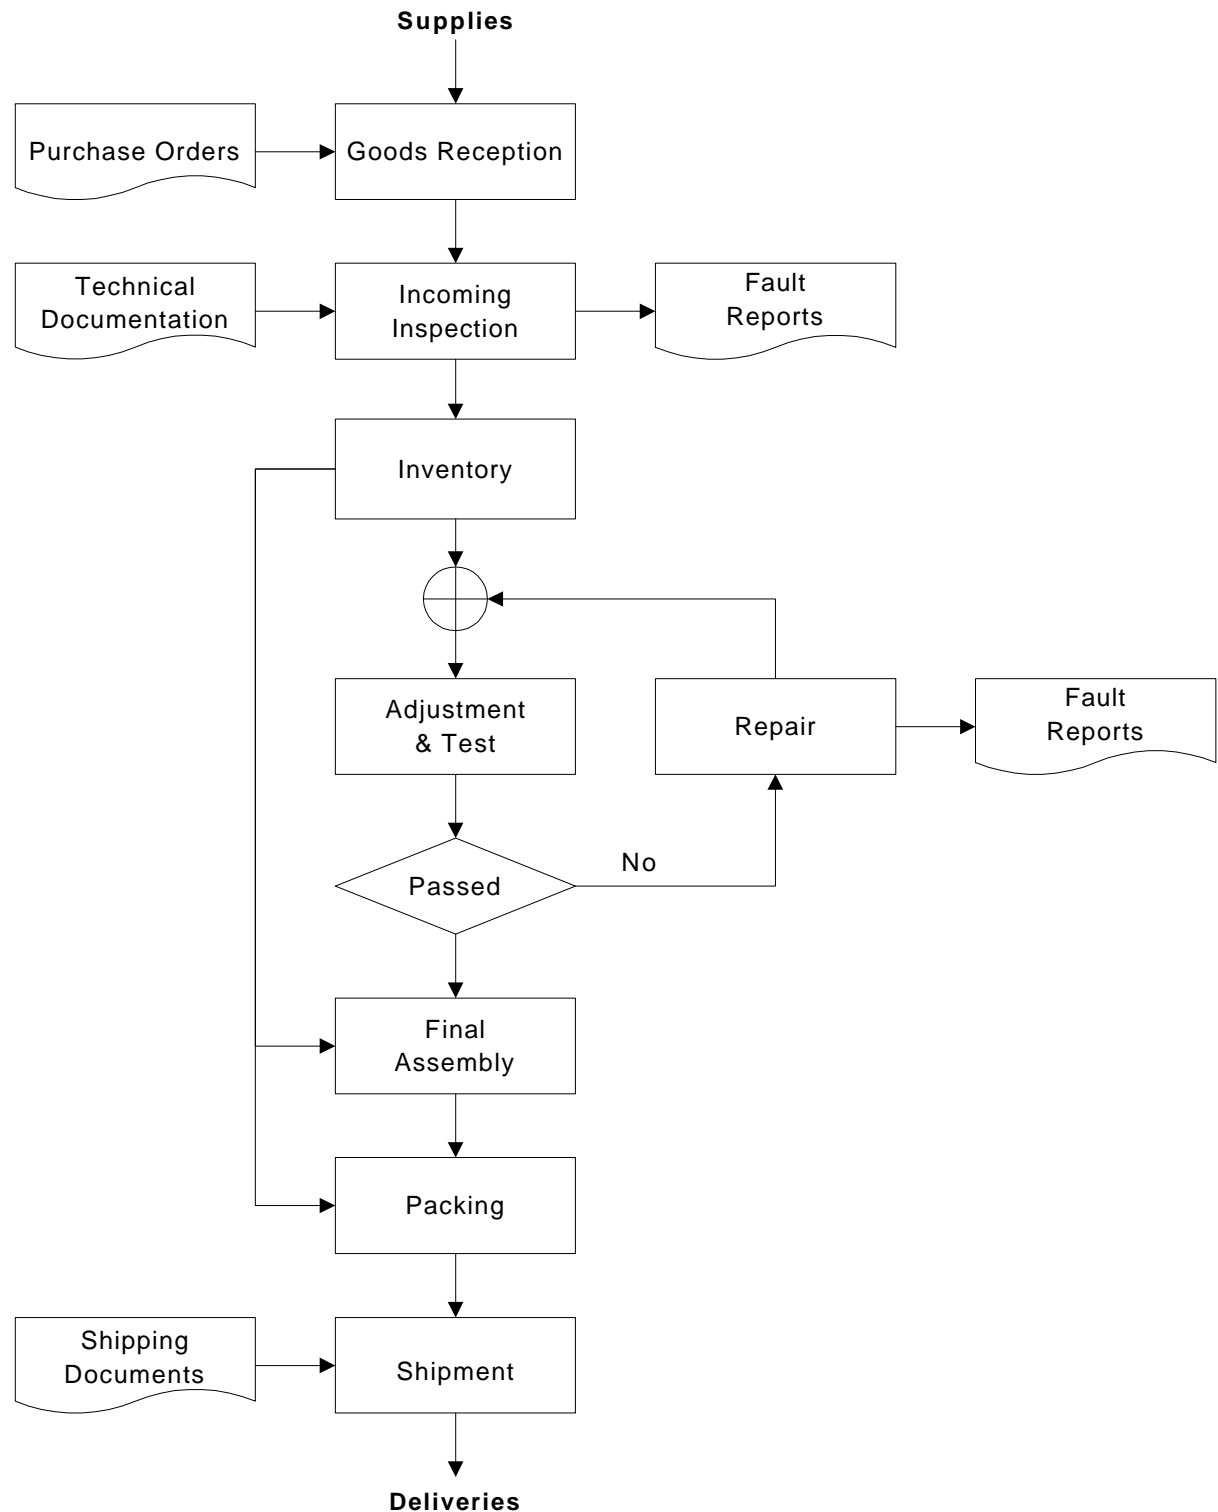

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>				
Prep. by: GBg	Checked by:	Approved by:	Doc. No. <b>9449 652 01001</b>	Page <b>3 of 14</b>
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:


## Responsibilities

Process	Stores	Test	Purch.	Eng.	Sales
Goods Reception	X				
- <i>Purchase Orders</i>			X		
Incoming Inspection	X				
- <i>Technical Documents</i>				X	
- <i>Fault Reports</i>	X				
Inventory	X				
Adjustment & Test		X			
Repair		X			
- <i>Fault Reports</i>		X			
Final Assembly		X			
Packing	X				
Shipment	X				
- <i>Shipping Documents</i>					X

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428      Component Digital Sync Generator</b>				
Prep. by: GBg	Checked by:	Approved by:	Doc. No. <b>9449 652 01001</b>	Page <b>4 of 14</b>
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

## Test and Adjustment Process

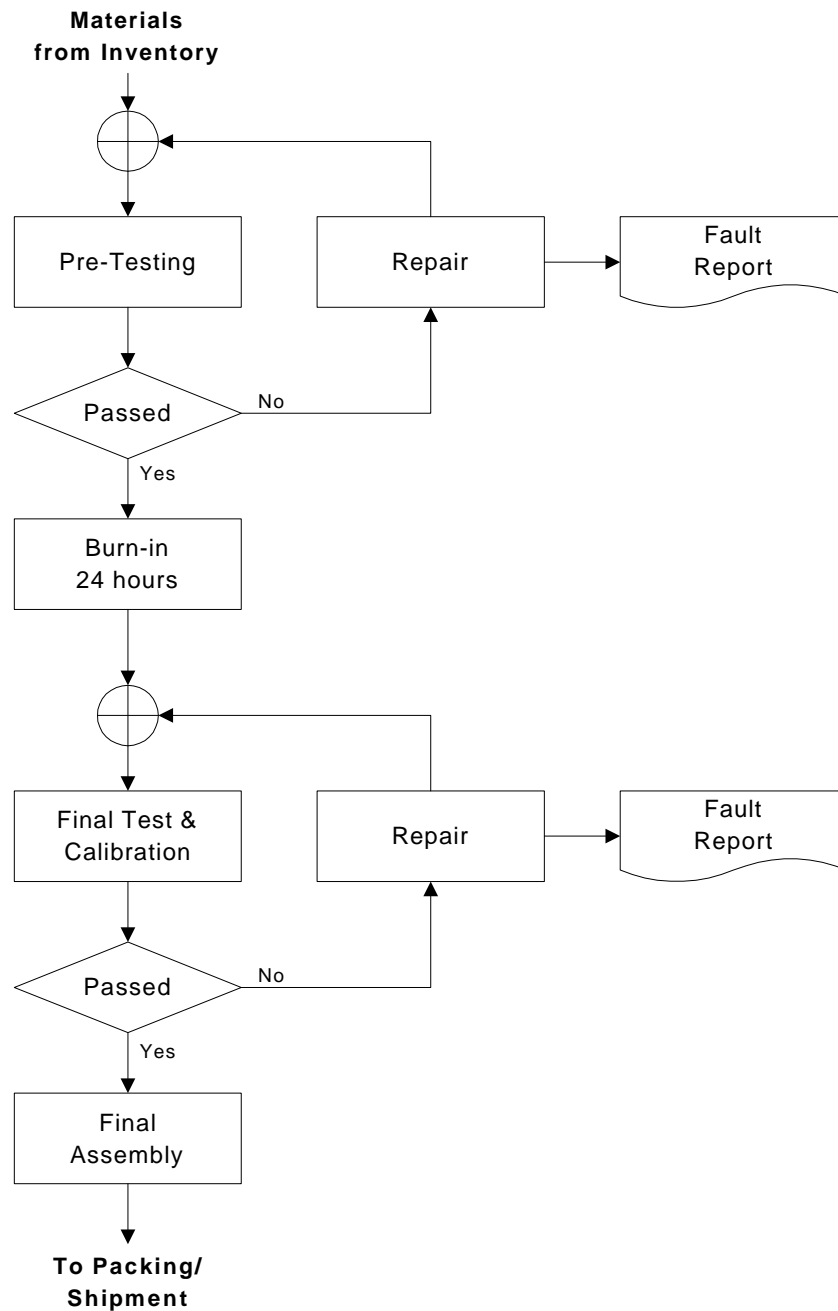

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>				
Prep. by: GBg	Checked by:	Approved by:	Doc. No. <b>9449 652 01001</b>	Page <b>5 of 14</b>
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

## Test and Adjustment Program for LT428 Component Digital Sync Generator.

### Introduction.

The design of LT428 is fully digital with 3 microcomputers controlling synthesis of all its signals. There are no manual adjustments (like potentiometers, variable capacitors, coils, etc). All parameters necessary for signal synthesis reside as variables in a non-volatile memory. After assembly at the factory, these variables have to be properly initialized for each generator produced.

To do this, a dedicated test bench was built consisting of various instruments controlled by a PC through serial, parallel and GPIB interfaces. A test program running on the PC instructs an operator on how to connect and use the instruments, reads the instruments, calculates all necessary parameters and writes them into LT428's memory.

LT428 parameters are also checked to be within specified tolerances.  
If all adjustments and checks are positive, a report is created in form of a file.

Below follows a short description of all test procedures.

### Power Supply Check.

Three power supply values: 5 volt, 3.3 volt and -5 volt are checked to be within tolerances:  
4.8V to 5.2V  
3.168V to 3.432V  
-5.2V to -4.8V

### Reset Sync Pulse Generator.

The Sync Pulse Generator is the main part of the LT428; it's purpose is to generate various synchronization signals for black-burst, color and AES/EBU generators. The SPG has its own microcomputer and utilizes a RAM based PLD which has to be programmed from the master controller. Reset SPG procedure initializes the SPG microcomputer.

### Adjust 13 MHz TCXO.

The 13 MHz Temperature Compensated Crystal Oscillator serves as a frequency reference for LT428. It is a voltage-controlled oscillator; the control voltage is obtained from a DAC connected to SPG microcomputer. To adjust the oscillator, Black Burst 1 is set to output a 4.5 MHz sinus signal, which is derived from oscillator's 13 MHz signal. This 4.5 MHz signal is fed to a frequency counter and the oscillator's control voltage is changed until BB1 emits 4.5 MHz  $\pm 0.2$ Hz. The DAC output voltage and hertz/step value are also checked to be within tolerances (from 0V to 1.5V and bigger than 0.05 Hz/step). The frequency counter used (HP53132A) uses a 10 MHz reference signal coming from a GPS receiver.

### Calibration of Genlock Color Framing.

This involves calculation and setting of variables in SPG microcomputer, which control horizontal position of the Black Burst Signals in relation to the genlock signal. LT428 Genlock input is fed from an external generator with a PAL black burst signal with ID. The Black Burst output is set to PAL with ID. Both signals are observed on an oscilloscope. The variables are adjusted until the IDs on both signals are in phase. The procedure is then repeated for NTSC.

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>			Doc. No.	
Prep. by: GBg	Checked by:	Approved by:	<b>9449 652 01001</b>	Page <b>6 of 14</b>
<b>PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK</b>				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

### Check Genlock.

Here the ability to lock to different signals is tested. LT428 Genlock input is fed from PM5640 Video Test Signal Generator, which is programmed to give signals with different sync and burst amplitudes, with hum and noise superimposed.

Genlock state is tested under following conditions:

PAL Genlock - Burst 150 mV, Sync 180 mV, Hum 500 mV, Noise -40 dB  
 PAL Genlock - Burst 600 mV, Sync 600 mV, Hum 500 mV, Noise -40 dB  
 NTSC Genlock - Burst 20 IRE, Sync 24 IRE, Hum 50 IRE, Noise -40 dB  
 NTSC Genlock - Burst 80 IRE, Sync 80 IRE, Hum 50 IRE, Noise -40 dB  
 10 MHz Genlock – 1.5 Vpp  
 10 MHz Gen-lock – 0.5Vpp

### Black Burst Generator Adjustment.

mVperStep for BB Sync Level DAC is checked to be between 0.1 and 0.4 mV/step.

mVperStep for BB offset DAC is checked to be between 0.2 and 1.0 mV/step.

Level of BB signal's sync level is checked to be  $-300 \pm 2$  mV.

DC level superimposed on the BB signal is checked to be  $0 \pm 3$  mV.

The LT428 Genlock input is fed from a reference Black Burst signal.

The BB signal is fed to a Vectorscope (for Sch measurement) and to input A of a Waveform Monitor.

Input B of the Waveform Monitor is fed with LT428 Genlock output (reference BB signal) and the monitor is set to display the difference between its 2 inputs. The operator adjusts Sch Offset until the Vectorscope shows 0, then Phase Offset and Gain until Waveform monitor shows a straight line, i.e.

Black Burst and the reference signal are in phase.

Calibration of Burst amplitude and SC-H phase checked on VM700:

Burst amplitude within  $\pm 1\%$

SC-H phase within  $1^\circ$

If values outside tolerance, parameters are readjusted

### TSG Luminance Calibration.

mVperStep for TSG Level DAC is checked to be between 0.15 and 5.0 mV/step.

TSG level is measured to be of  $700 \pm 0.2$  mV for PAL and

$714 \pm 0.2$  mV for NTSC.

### TSG Timing Adjustment.

The LT428 Genlock input is fed from a reference Black Burst signal.

The TSG signal is fed to a Vectorscope (for Sch measurement) and to input A of a Waveform Monitor.

Input B of the Waveform Monitor is fed with LT428 Genlock output (reference BB signal) and the monitor is set to display difference between its 2 inputs. The operator adjusts Sch Offset until the Vectorscope shows 0, then Phase Offset and Gain until Waveform monitor shows a straight line, i.e. TSG and the reference signal are in phase.

Calibration of Burst amplitude and SC-H phase checked on VM700:

Burst amplitude within  $\pm 1\%$

SC-H phase within  $1^\circ$

If values outside tolerance, parameters are readjusted

### TSG Pattern Check.

All patterns available in TSG generator are sequentially displayed on a video monitor. The operator checks and confirms that they are as specified.

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>				
			Doc. No.	
Prep. by: GBg	Checked by:	Approved by:	<b>9449 652 01001</b>	Page
				<b>7 of 14</b>
<b>PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK</b>				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

### SDI Jitter and Amplitude Spectrum Check.

Jitter of the SDI signal is tested on R&S VCA (Digital Video Component Analyzer). Measurements are made during 4 frames and during 1 line.

For 4 frames the jitter must be less than 0.15 UI.

For 1 line the jitter must be less than 0.07 UI.

Jitter is tested under the following conditions:

Internal genlock

PAL genlock

10 MHz Genlock

Then the spectrum test is performed on VCA in the range of 10 - 350 MHz.

At 10 MHz the level must be within -0.65 to 0.65 dB.

At 350 MHz the level must be less than -12 dB.

### SDI Embedded Audio Check.

TEK 764 Digital Audio Monitor is used. V BIT (Validity Bit) must be set.

### Analog Audio Level Calibration.

Nominal audio level is set to be 1550.0 V  $\pm$  5 mV.

mV per step of digital potentiometers is checked and must be within 1 and 6 mV/step.

Audio levels checked: +8, +4, 0, -6, 12 and -18 dBu (frequency 1 kHz)

All analog audio levels are checked at 1 KHz to be within  $\pm$ 0.3 dBu.

Audio amplitude check for 500 Hz, 1 kHz and 8 kHz::

Level: 775 mV  $\pm$  15 mV.

### Analog Audio Frequency Check.

The tolerance of analog frequency is  $\pm$ 1 Hz. The check is performed for level of 0 dBu at frequencies 500 Hz, 1 kHz and 8 kHz.

### AES Audio Generator Test.

VCO voltage is tested at 6.144 and 5.6448 MHz to be between -2.0 and 1.0 V.

Then, frequencies of stereo tones of 500 Hz, 1000 Hz and 8 kHz at sampling rates of 48 kHz and 44.1 kHz are tested to be within  $\pm$  0.2 Hz.

### AES Audio Level Check.

All AES audio levels are tested with the TEK 764 monitor. The operator reads measured level and either accepts or rejects the result. The accuracy of the monitor level meters is  $\pm$  0.05 dB.

### Word Clock Output Test.

The frequency of Word Clock is checked to be of 48 kHz  $\pm$  0.2 Hz.

Peak-to-Peak value of Word Clock voltage is checked to be between 2.2 and 2.7 V.

Peak-to-Peak value of Word Clock offset voltage is tested to be between 1.0 and 1.5 V.

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>				
Prep. by: GBg	Checked by:	Approved by:	Doc. No. <b>9449 652 01001</b>	Page <b>8 of 14</b>
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				



DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

## Appendix A

### List of Test Instruments

<i>Type</i>	<i>Serial No.</i>	<i>Description</i>	<i>Manufacturer</i>
PM 5640G	TEST	Video Test Signal Generator	PTV
PM 5640M	TEST	Video Test Signal Generator	PTV
PM 5662G	TEST	Waveform Monitor / Vectorscope, ScH	PTV
PM 5662M	TEST	Waveform Monitor / Vectorscope, ScH	PTV
PM 3094	DM707001	Oscilloscope	Fluke
VCA	338275/024	Digital Video Component Analyzer	R&S
764	B021638	Digital Audio Monitor	Tektronix
PT 5210	TEST	Digital Video Generator	PTV
53132	3736A05798	Frequency Counter	HP
34970A	US37028651	Data Switch	HP
DEX3072	-	Digital Audio Extractor	Matthey
-	061-0304	SDI to Analog Converter	Miranda
CVM22B	5091104	Color Monitor	Barco
-	TEST	Video Level Meter	Philips
34401A	US36139206	Multimeter	Agilent
XL-DC	98214681	GPS Receiver	True Time

PRODUCTION			Date: 2003-05-15	Rev: 03
LT 428                      Component Digital Sync Generator				
			Doc. No. <b>9449 652 01001</b>	
Prep. by: GBg	Checked by:	Approved by:		Page <b>9 of 14</b>
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

## Appendix B

### Summary of accuracies and nominal values

#### Master Frequency

Accuracy @ 4,500,000 Hz:  $\pm 0.2$  Hz

#### Black Burst (Values for both PAL and NTSC)

mVperStep of BB Sync Level DAC: 0.1 - 0.4 mV/step

mVperStep of BB Offset DAC: 0.2 - 1.0 mV/step

BB Sync Level:  $-300 \pm 2$  mV

BB Offset:  $0 \pm 3$  mV

#### TSG

mVperStep of TSG Level DAC: 0.15 - 5 mV/step

TSG Level PAL:  $700 \pm 2$  mV

TSG Level NTSC:  $714 \pm 2$  mV

#### SDI Jitter

4 frames:  $< 0.15$  UI

1 line:  $< 0.07$  UI

#### SDI Amplitude Spectrum

@10 MHz Level:  $-0.65 - 0.65$  dB

@350 MHz Level:  $< 12$  dB

#### Calibration of Analog Audio Levels

Nominal Level for +6dBu 1550.0 mV

Level Tolerance for all levels  $\pm 5$  mV

mVperStep Digital Potentiometers: 1 - 6 mV/step

#### Check of Analog Audio Levels

Level Tolerance for all levels @ 1kHz:  $\pm 0.3$  dBu

#### Analog Audio Frequency

Tolerance (@0 dBu, 500 Hz, 1 kHz, 8 kHz):  $\pm 1$  Hz

#### AES Audio

Frequency tolerance:  $\pm 0.2$  Hz

#### Word Clock

48 kHz frequency tolerance:  $\pm 0.2$  Hz

P-P voltage: 2.2 - 2.7 V

P-P offset voltage: 1.0 - 1.5 V


<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>				
Prep. by: GBg	Checked by:	Approved by:	Doc. No. <b>9449 652 01001</b>	Page <b>10 of 14</b>
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

## Final mounting and Safety inspection

### Internal mechanical checks

1. Check all internal screws are mounted.
2. Check safety leads of power supply

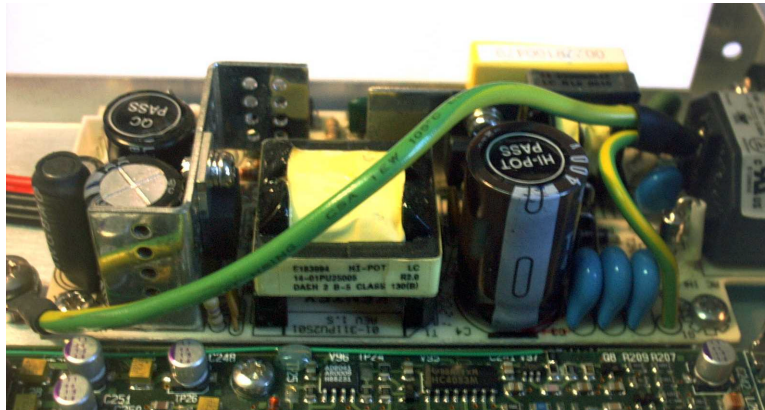

### Mounting of top cover

1. Make sure that light pipes are positioned correctly in the holes of the frontplate.
2. All screws M2.5x 4, part number 2522 187 62040
3. Fix screws securely.

### Safety tests

1. Continuity test between chassis and ground of power inlet  
Requirement: Resistance < 0.5 Ohm.
2. Isolation resistance:  
Apply 500V DC between shortcircuited mains inlet and ground terminal.  
Measure with mA-meter: less than 0.25 mA
3. High tension test:  
Apply 2500V DC for 1 minute between shortcircuited mains inlet and chassis.  
No flashes must occur (checked with mA-meter)
4. Leak current during operation:  
At max. Mains +10% measure current with mA-meter  
Requirement: < 1mA.

Safety data is recorded on the instruments "process" card.

After the safety test is passed, the "process" card is completed with date and operators name. Small green label (part number 4022 006 70890) is fixed to the rear close to the mains inlet and signed by the operator.

Checking after safety test:


A brief functional testing is performed on all inputs and outputs.

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>			Doc. No.	
Prep. by: GBg	Checked by:	Approved by:	<b>9449 652 01001</b>	Page 11 of 14
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

## Packing Instructions for LT428

### Serial Number




The serial number label is placed on the bottom under the AUDIO connectors.

The serial numbers to be applied are informed by Leader.


Serial no. of 1<sup>st</sup> batch (Sept. 2000- Dec. 2002): 3947576 through 3947625.

Serial no. of 2<sup>nd</sup> batch (Febr. 2003): 3477153 through 3477202.

Serial no of 3<sup>rd</sup> batch (June 2003): 3287980 - 3287999 and 3387000 - 3387029

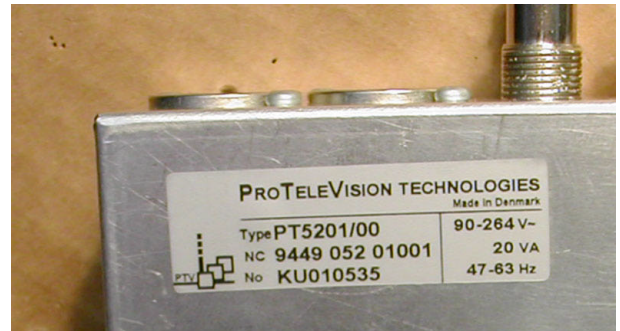


### Warning Label

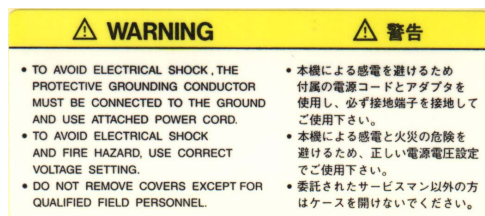


The warning label is placed on the cover at the front.



### Mains Supply Label



The Mains Supply Label is placed on the rear plate above the mains inlet socket.

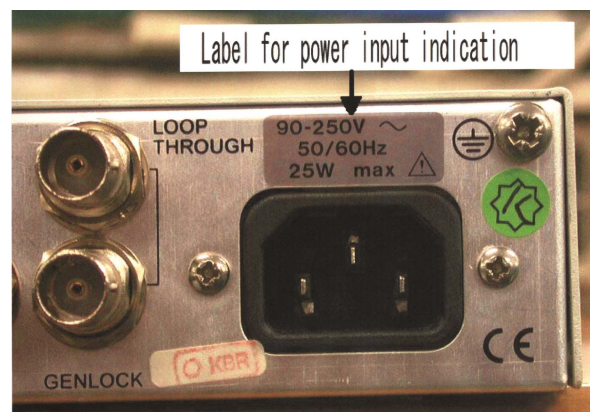

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>			Doc. No.	
Prep. by: GBg	Checked by:	Approved by:	<b>9449 652 01001</b>	Page
				<b>12 of 14</b>
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

## Accessories


The accessories for LT428 consist of the following parts:

Qty	Part no. 12NC	Description
	<b>4008 109 90010</b>	Accessories, consisting of:
1	4008 105 00020	US mains cord gray
1	Leader inserts	3P to 2P mains adapter
1	4008 105 05220	RS232 Interface Cable
1	4008 002 96000	CD-ROM for LT428 (Leader P/N 8045022019)
1	4008 002 96010	CD-ROM cover for LT428
1	<b>4008 107 60060</b>	Rack Mount Kit


## Box Labels

Two (2) labels are placed on each carton box.

NB: *The serial number on this label shall correspond to the serial number on the instrument in the box.*

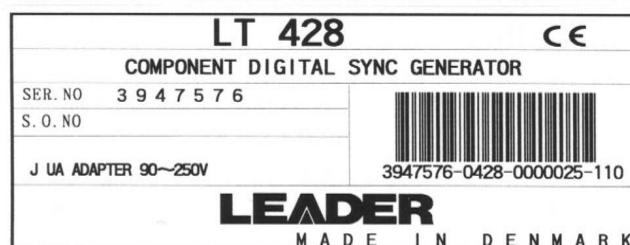

This box is same style as LT428.

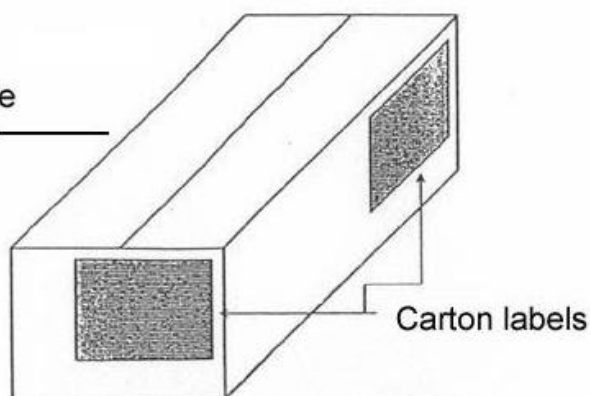

## Box Sealing and Shipment Boxes

The carton boxes shall be closed with clear tape. **No stapling.**

The carton boxes with the LT428 shall be packed for shipment in another carton box, which is marked according to DK-Audio/PTV standard export packaging.

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>			Doc. No.	
Prep. by: GBg	Checked by:	Approved by:	<b>9449 652 01001</b>	Page
				<b>13 of 14</b>
PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK				

DKA- Rev: 01	DKA- Rev:02	DKA- Rev:03	DKA- Rev:
Date: 06-11-2001	Date:29-01-2003	Date:15-05-2003	Date:

## Spare Parts

### Parts for Board Swapping and Mechanical Repairs

Part Number	Description	New	Refurbished
4008 109 86650	Power Supply Assy	X	
4008 109 90080	Main Board Assy	X	X
4008 107 59380	Top Cover	X	
4008 127 04200	Outer Case w/Text	X	
4008 108 56510	Front w/Overlay	X	

Note:

Mainboard assy 4008 109 90080 is superceeding 4008 109 86660

<b>PRODUCTION</b>			Date: 2003-05-15	Rev: 03
<b>LT 428 Component Digital Sync Generator</b>				
Prep. by: GBg	Checked by:	Approved by:	Doc. No. <b>9449 652 01001</b>	Page <b>14 of 14</b>
<b>PROPERTY OF DK-AUDIO A/S, MARIELUNDVEJ 37D, DK-2730 HERLEV, DENMARK</b>				