


SLIM DB9 MALE CONNECTOR RIGHT ANGLE DIP TYPE

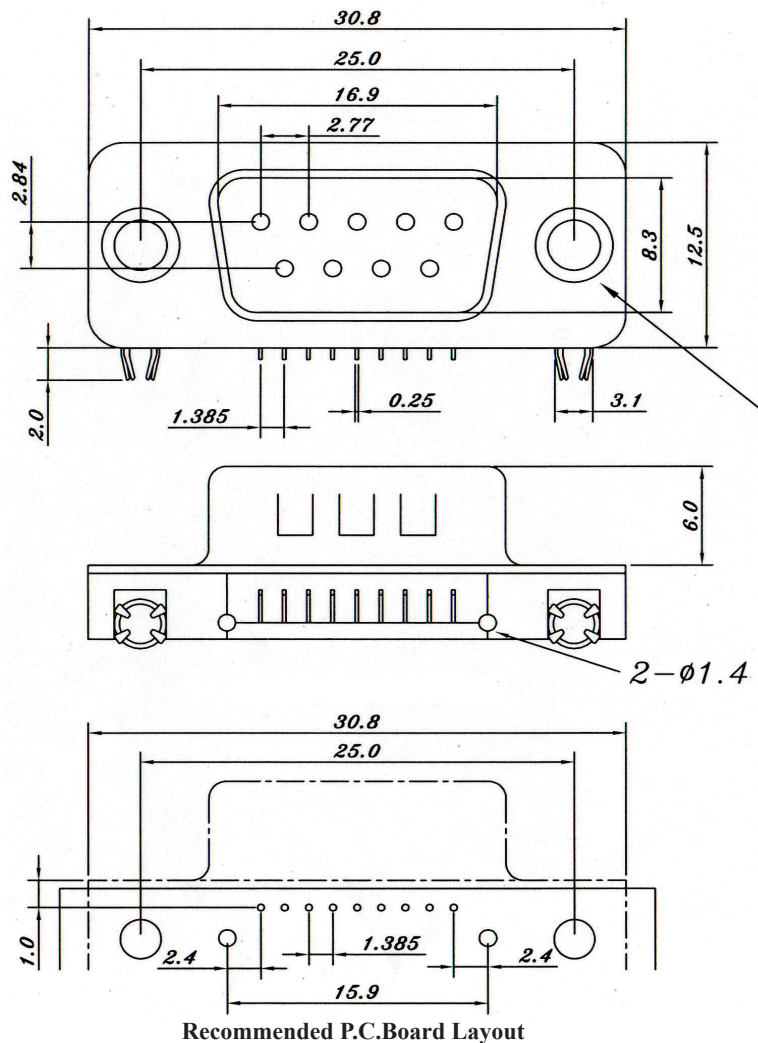

SPECIFICATIONS

Current Rating: 1.0 Ampere

Contact Resistance: 20mΩ Max. at DC 100mA

Insulation Resistance: 500MΩ Min. at 500V DC

Operating Temperature: -65°C to +125°C

Max Processing Temperature:

230°C for 30~60 Seconds

MATERIALS

Insulator: High Temperature Housing (UL94V-0)


IR and VPR Soldering Methods.

Contact: Phosphor Bronze

Plated: Selective Gold Plated

All materials must be RoHS compliant.

UNC 4#40*2

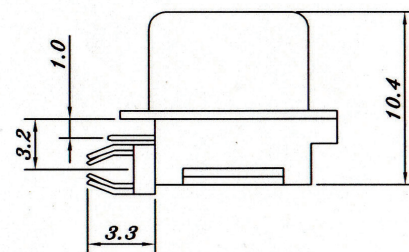

ORDERING INFORMATION:

P/N 5 299 - DB09 RA / x x

1. CONNECTOR TYPE:

"299" MALE

2. NO. OF CONTACTS:

"DB09" DB9M

3. TERMINAL TYPE:

"RA" R/A DIP TYPE

4. FLANGE MOUNTING OPTION:

"N" #4-40UNC THREADED HOLES
WITHOUT HEX SCREW BOLTS

"NH" #4-40UNC THREADED HOLES
WITH BULK-PACKED (LOOSE)

#4-40UNC HEX SCREW BOLTS

"NJ" #4-40UNC THREADED HOLES
WITH INSTALLED (ASSEMBLED)

#4-40UNC HEX SCREW BOLTS