


● ENCLOSED SINGLE-TABLE FIBER LASER

PowerCut *Series*

WFC MODELS · 3 KW – 12 KW · 3080 × 1540 MM

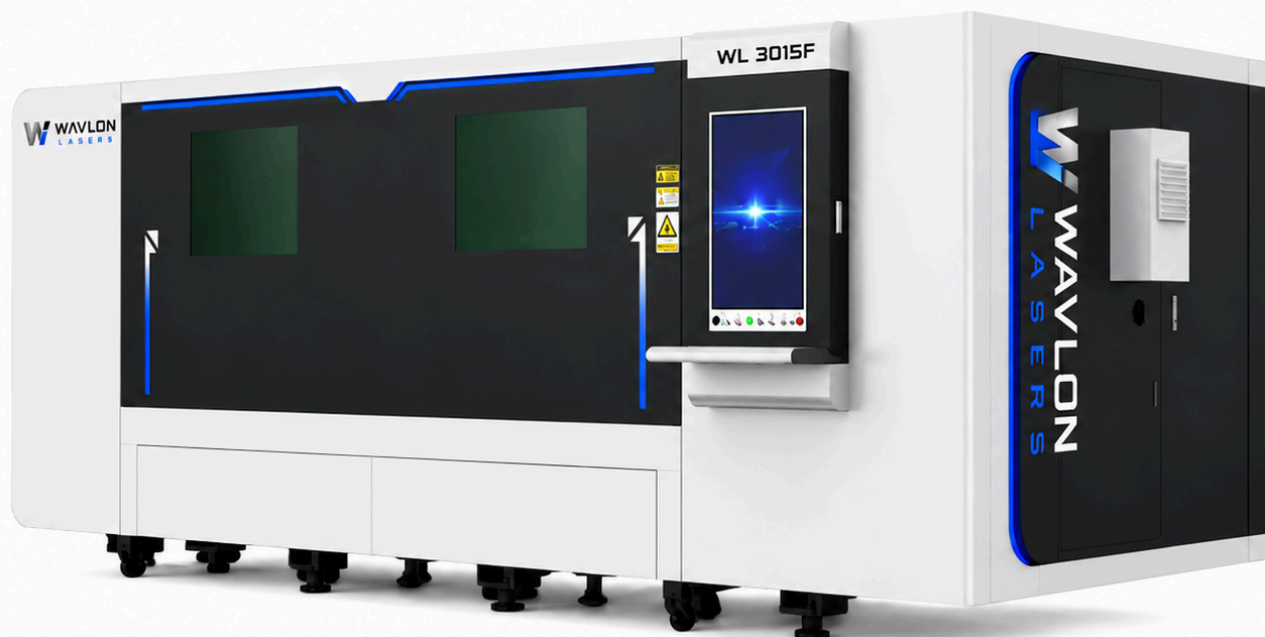

POWER RANGE

3 – 12 KW

WAVLON / WFC
DOC-WFC-CAT-001

The **PowerCut Series** is Wavlon's fully enclosed single-table platform — high-rigidity cutting with North-American safety and service built in.

Built around a heavy-duty annealed welded bed with reinforced mortise-and-tenon construction, the WFC Series delivers exceptional rigidity and long-term precision. A fully enclosed safety cover, automatic pull-out table, and light safety curtains keep the operator protected while smoke, dust, and sparks stay contained.

Engineered for the shop floor. Designed for fast training. Backed by Canadian sales and service.

01 — SINGLE TABLE

Auto Pull-Out Table

One automatic shuttle table positioned at the front for easy loading, unloading, and maintenance — clear access without breaking the enclosure.

02 — RIGIDITY

Annealed Welded Bed

Heavy-duty welded structure with reinforced internal rib plates and mortise-and-tenon joints — minimal vibration, minimal deformation, long-term accuracy.

03 — SAFETY

Fully Enclosed Cabin

OD4+ rated viewing window, interlocked auto door, and light safety curtains. CSA-aligned, contained, and certified for North American floors.

04 — SUPPORT

Canadian-Backed Service

Sales, installation, training, and spare parts from a North American team — with remote support and locally available components.

High-rigidity cutting, ready for the North American *shop floor*.



MAX LASER POWER

12 kW

From 3 kW · MAX source

MAX STEEL

35 mm

Carbon steel · 12 kW

MAX SPEED


120 m/min

1.2 G acceleration

REPEAT PRECISION

±0.02 mm

Per 1000 mm

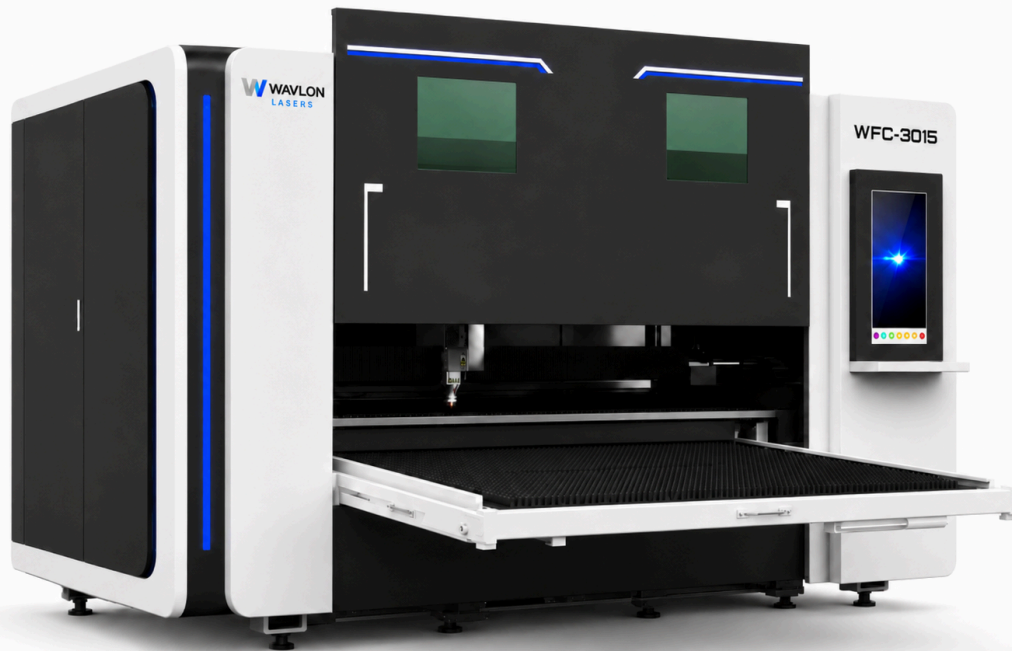

Automatic Pull-Out Table.

A single automatic shuttle table runs out to the front of the machine, fully clear of the enclosure, so the operator can load raw sheet and clear finished parts with open, unobstructed access. The table is positioned at the front by design — cutting dust collects where it can be cleaned, and routine maintenance never means reaching across the bed.

Automatic door and table movement are interlocked: the door stops and alarms the moment it is opened, and light curtains halt motion before anyone reaches the cutting zone.

— CYCLE

01

Table runs out to front

The pull-out table travels clear of the enclosure for open, unobstructed loading.

02

Load & auto-return

Operator stages the sheet; the table returns and the interlocked door closes before cut.


03

Enclosed cut

Cutting runs inside the sealed cabin with zoned smoke extraction. Unload at the front when done.

Fully Enclosed Safety Cabin.

A thickened, fully enclosed outer cover keeps operators safe and the environment clean — containing spark splash, smoke, and dust while a transparent OD4+ window keeps the cut in view. Built to meet North American safety requirements, including CSA standards.

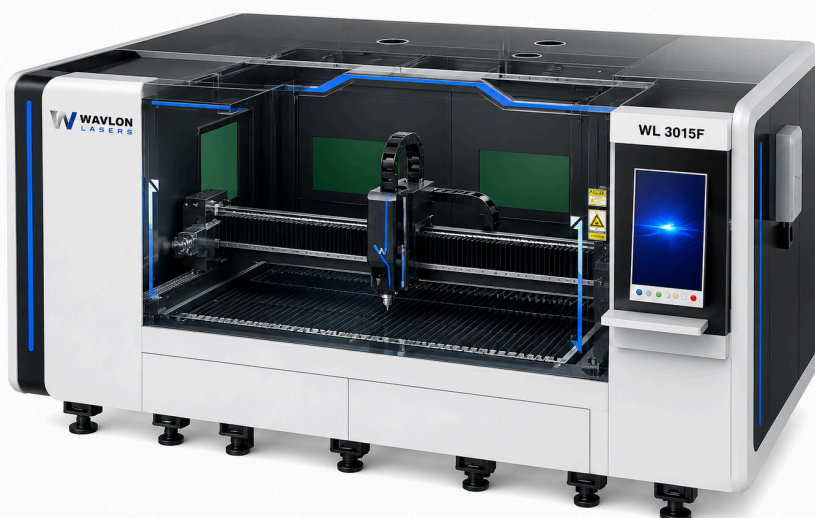

CABIN — AT A GLANCE

- 01 OD4+ viewing window**
Dustproof, radiation-shielded transparent window lets the operator watch the cut safely.
- 02 27-inch console**
Internal-design touchscreen running Cypcut / Hypcut, mounted operator-facing for fast training.
- 03 Blue accent lighting**
Vertical accent strips flank the cabin — a Wavlon design signature.
- 04 Integrated electrical cabinet**
The cabinet is built into the machine body, minimising the overall footprint.



Enclosed & interlocked

Full enclosure with door interlock, emergency stop, and automatic alarm protection. Safe for any production environment.



27-inch console

Internal-design touchscreen with Cypcut / Hypcut software, designed for simple operation and fast operator training.



Smoke & dust containment

The sealed cover contains spark splash and particulate; zoned extraction clears the cabin throughout the cut.

Monitored inside, *integrated throughout.*

Inside the fully enclosed cabin an internal camera keeps the operator in command of the cut — while the electrical cabinet folds into the machine body to keep the footprint tight.



01 · INSIDE THE CABIN

Camera Monitoring System.

Internal cameras stream a live feed from inside the fully enclosed cabin to the operator-facing console — every cut stays visible without breaking the enclosure, in both bright and low-light shop conditions.

02 · INTEGRATED CABINET


Integrated Electrical Cabinet.

The built-in electrical cabinet is seamlessly incorporated into the machine body — no separate floor-standing enclosure to place or wire. Components are arranged in clearly organised tiers for fast servicing, while the integrated design minimises the machine's footprint and keeps the shop floor clear.



Engineered for Rigidity.

The machine bed is an in-house welded structure, annealed to release internal stress, with reinforced rib plates and mortise-and-tenon joints. The cross beam is high-strength steel, tempered for thermal stability under heavy cutting — so the WL-F holds dimensional accuracy through extended production.

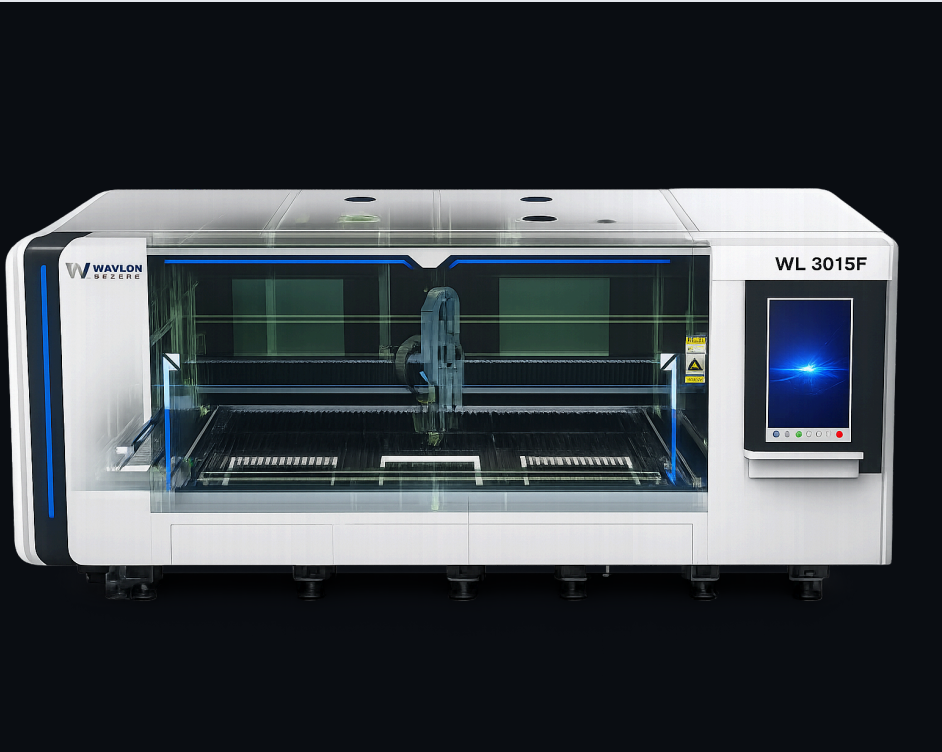

STRUCTURE — AT A GLANCE

01 Annealed welded bed

Stress-relieved welded structure minimises deformation for long-term accuracy and durability.

02 Reinforced rib plates

Internal mortise-and-tenon ribs add rigidity and suppress vibration at high-speed travel.

03 High-strength steel beam

Integrated, tempered steel cross beam holds accuracy under thermal load during heavy cutting.

04 Welded plate frame

Metal-plate welded construction forms a stable, rigid base for consistent long-term accuracy.



Zoned smoke extraction

Extra-large air duct with independent, zoned dust removal improves smoke and particulate clearance.



Refractory bricks

Composite refractory bricks resist slag and high heat — simpler cleaning and lower labour cost.



OD4+ protective window

Transparent OD4+ rated window provides dustproof, radiation-shielded protection while keeping the cut visible.

BOCI BLT cutting heads.

The laser head is one of the most important parts of any cutting machine. Each PowerCut power tier ships with the matched **BOCI BLT cutting head** — BLT-310, BLT-421S, or BLT-442 — with fast focusing, collision protection, protective-window monitoring, and water cooling. **Precitec head integration is available** on request.




FIG. 01 — BOCI BLT CUTTING HEAD ASSEMBLY · REPRESENTATIVE MODEL

EXPLODED VIEW



PROTECTIVE LENS



POWER	BLT HEAD	NOTES
3 kW	BLT-310	Thin-gauge fidelity, fast focus
6 kW	BLT-421S	Mid-range work-horse head
12 kW	BLT-442	Thick-plate, adaptive standoff
InterfaceQBH / EOC		150 / 200 mm focal options
Opt.	Precitec	Premium integration on request



Cypcut & Hypcut Control.

Windows-native CNC software on a 27-inch internal-design console — nesting, edge searching, range checking, and live cut monitoring in one operator-facing interface, with DXF / DWG / AI import.

- FSCUT2000E / 4000E / 8000 controllers matched to power tier
- Cypnest nesting software included standard on the 12 kW
- Automatic calibration and one-click edge search
- 27" touchscreen — internal design, operator-facing

LASER SOURCE MAX FIBER LASER	SERVO MOTOR Yaskawa JAPAN	LINEAR GUIDE RAIL ROUST GERMANY	HELICAL RACK Eblun TAIWAN
REDUCER TECHMECH PRECISION DRIVE	ELECTRICAL Schneider · ABB FRANCE	PNEUMATIC / GAS SMC PNEUMATICS	WATER CHILLER S&A PROCESS COOLING

Choose your *power tier*.

Every PowerCut shares the same enclosed single-table cabin, annealed welded bed, motion package, and component lineup on the 3015 frame (3080 × 1540 mm). Pick the laser power to match your material mix.

MOST POPULAR			
ENTRY LEVEL		MOST POPULAR	
3 kW		6 kW	
WFC-3015-3K		WFC-3015-6K	
Steel	0.5–16 mm	Steel	0.5–22 mm
Head	BLT-310	Head	BLT-421S
Control	FSCUT2000E	Control	FSCUT4000E
Nesting	Optional	Nesting	Optional
HIGH PERFORMANCE			
12 kW			
WFC-3015-12K			
Steel	2–35 mm	Steel	2–35 mm
Head	BLT-442	Head	BLT-442
Control	FSCUT8000	Control	FSCUT8000
Nesting	Cypnest std.	Nesting	Cypnest std.

Other power levels — available on request.

Fiber sources are offered from 3 kW upward. For an intermediate or higher power than the standard tiers, PowerCut is configured to spec with a matched laser head, control, and chiller package. Contact sales for configuration and lead-time.

WFC · CUSTOM
BY QUOTATION

WFC-3015 Models

Working area 3080 × 1540 mm · Enclosed single-table platform

WFC-3015

SPECIFICATION	WFC-3015-3K	WFC-3015-6K	WFC-3015-12K
Laser Power	3 kW	6 kW	12 kW
Working Area	3080 × 1540	3080 × 1540	3080 × 1540
Steel Cutting Range	0.5 – 16	0.5 – 22	2 – 35
Laser Head	BLT-310	BLT-421S	BLT-442
Control System	FSCUT2000E	FSCUT4000E	FSCUT8000
X-Axis Travel	1540	1540	1540
Y-Axis Travel	3080	3080	3080
Z-Axis Travel	300	300	300
Max Acceleration	1.2 G	1.2 G	1.2 G
Max Speed	120 m/min	120 m/min	120 m/min
Nesting Software	Optional	Optional	Cypnest std.

Common Specifications — All PowerCut Models

LASER SOURCE	MAX
SERVO MOTOR	Yaskawa (Japan)
REDUCER	TECHMECH
LINEAR GUIDE RAIL	ROUST (Germany)
HELICAL RACK	Eblun (Taiwan)
ELECTRICAL	Schneider & ABB (FR)
PNEUMATIC / GAS	SMC
WATER CHILLER	S&A

MACHINE FRAME	Welded metal plate
MACHINE BEAM	Steel
ENCLOSURE	Full enclosed cabin
TABLE TYPE	Single auto pull-out
OPERATING VOLTAGE	380 V / 3-ph / 60 Hz
SOFTWARE	Cypcut / Hypcut
SCREEN	27" internal console
CERTIFICATION	FDA & CE / CSA

Positioning accuracy ±0.03 mm/m · Repositioning accuracy ±0.02 mm/m · Calibration automatic. Cutting ranges are for carbon steel and depend on gas and material. **Custom power and configurations available on request** — contact sales@wavlonlasers.com for the most current data sheet.

ProCut • *PowerCut* • UltraCut.

Three Wavlon sheet platforms cover entry-level through flagship production. PowerCut is the enclosed mid-tier — a fully enclosed safety cabin with a single automatic pull-out table on the proven 3015 frame.

SHEET-CUTTING SERIES	THIS CATALOG		
	WPC • ENTRY ProCut Entry-level job shops. Gantry beam, open bed.	WFC • MID PowerCut Enclosed mid-tier with single automatic pull-out table.	WUC • FLAGSHIP UltraCut Flagship dual-exchange production. Widest power range, both frames.
	POWER RANGE	3 – 12 kW	3 – 20 kW • to 160 kW POA
	MAX STEEL	35 mm	40 mm
	MAX ACCELERATION	1.0 G	1.2 G
	MAX SPEED	100 m/min	120 m/min
	ENCLOSURE	Gantry beam, open	Full enclosed cabin
	TABLE TYPE	Open single table	Dual exchange shuttle
	FRAME OPTIONS	3015 / 4020	3015 / 4020
	BEST FOR	Entry-level job shops	Flagship production

POA = Price on Application. Full spec sheets for each series are available on request from sales@wavlonlasers.com.



CANADIAN SALES & SUPPORT

Industrial-grade laser cutting, backed by Canadian *service.*

Wavlon Lasers builds, installs, and supports fiber laser cutting machines from Toronto. Sales, installation, training, parts, and long-term service — engineered for North American shop floors. Get a configuration and quote within one business day.

CSA-ALIGNED

1 YR ONSITE WARRANTY

PARTS WARRANTY

SALES · QUOTES

sales@wavlonlasers.com

+1 (888) 277-6144

Mon-Fri · 8am – 6pm EST

OFFICE

Toronto, Ontario

Canada

ONLINE

wavlonlasers.com