


● GANTRY FIBER LASER · OPEN BED

ProCut *Series*

WPC MODELS · 3 KW – 20 KW · 3015 / 6020 + UL

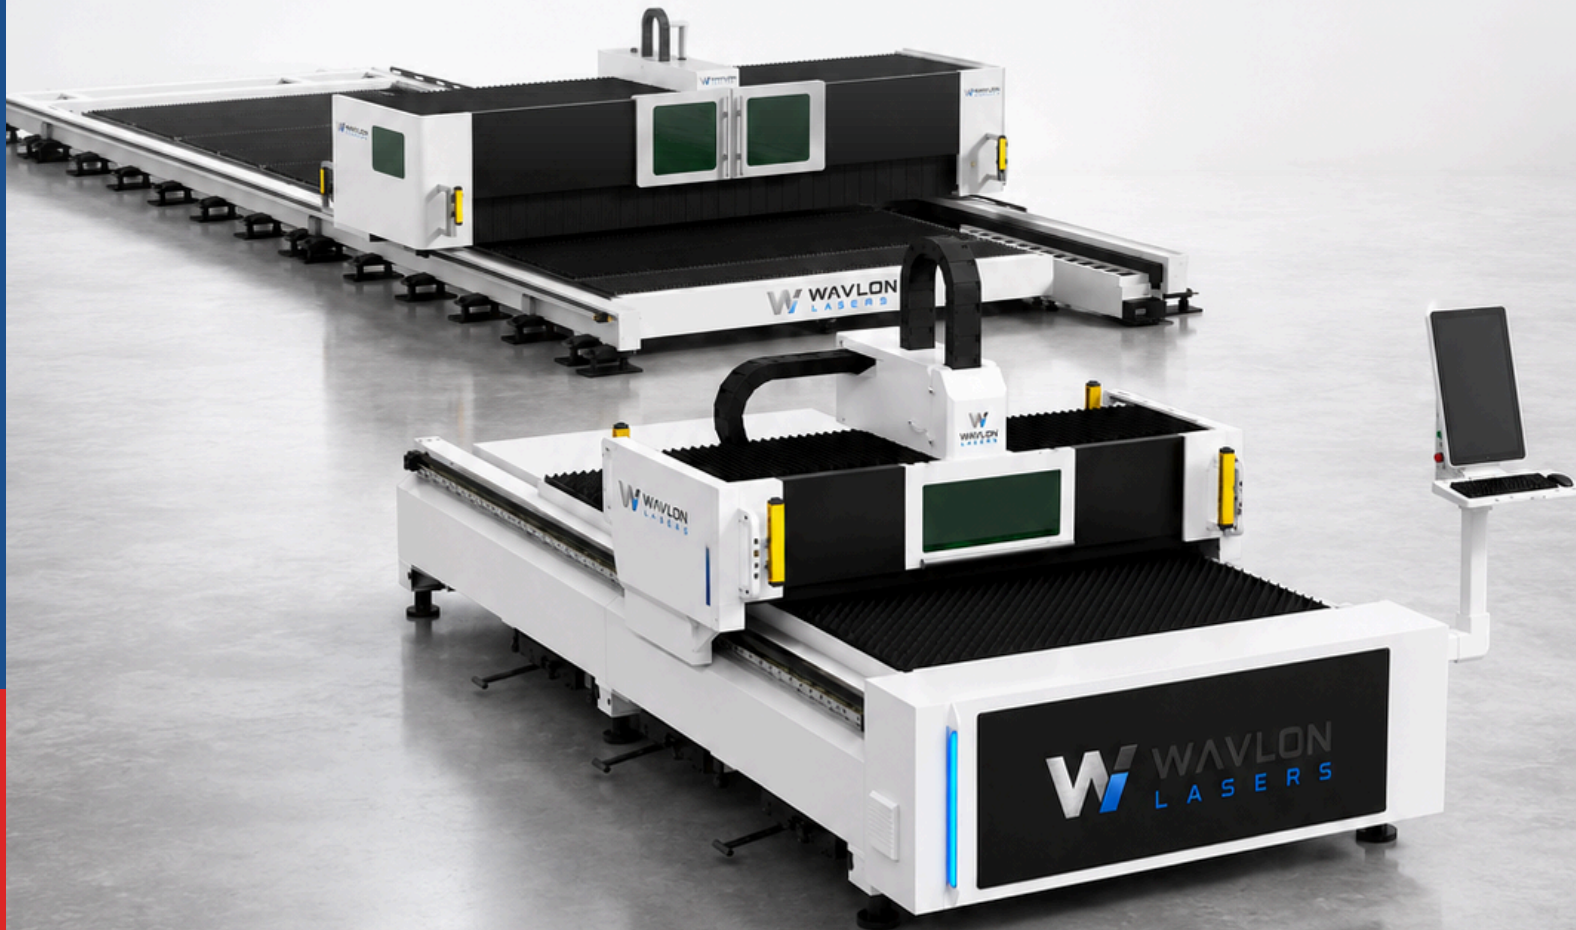

POWER RANGE

3 – 20 KW

WAVLON / WPC
DOC-WPC-CAT-001

The **ProCut Series** is Wavlon's entry-level gantry platform — an enclosed cutting head and beam traveling over an open machine bed, built for fast, no-fuss sheet production.

Built on a welded, stress-relieved bed with an open work area, the WPC Series gives operators clear, unobstructed access to load and unload large or heavy sheet directly. The cutting head and cross beam run inside an enclosed gantry hood, while high-sensitivity light curtains and a built-in electrical cabinet keep the operator protected and the footprint tight.

The entry-level workhorse — from a 3015 frame to ultra-large-format UL beds. Designed for fast training. Backed by Canadian sales and service.

01 — OPEN BED

Open-Access Work Bed

The gantry travels over a fixed open bed, giving clear, unobstructed access to load and unload large or heavy sheet directly — no enclosure to work around.

02 — GANTRY

Enclosed Head & Beam

The cutting head and cross beam run inside an enclosed gantry hood with an OD-rated viewing window — protection at the cut, openness where you load.

03 — SAFETY

Light Curtains & Cabinet


High-sensitivity light safety curtains guard the cutting zone, while the electrical cabinet is built into the machine body to minimise footprint.

04 — SUPPORT

Canadian-Backed Service

Sales, installation, training, and spare parts from a North American team — with remote support and locally available components.

Fast, open-bed cutting, built for the working North American *job shop*.

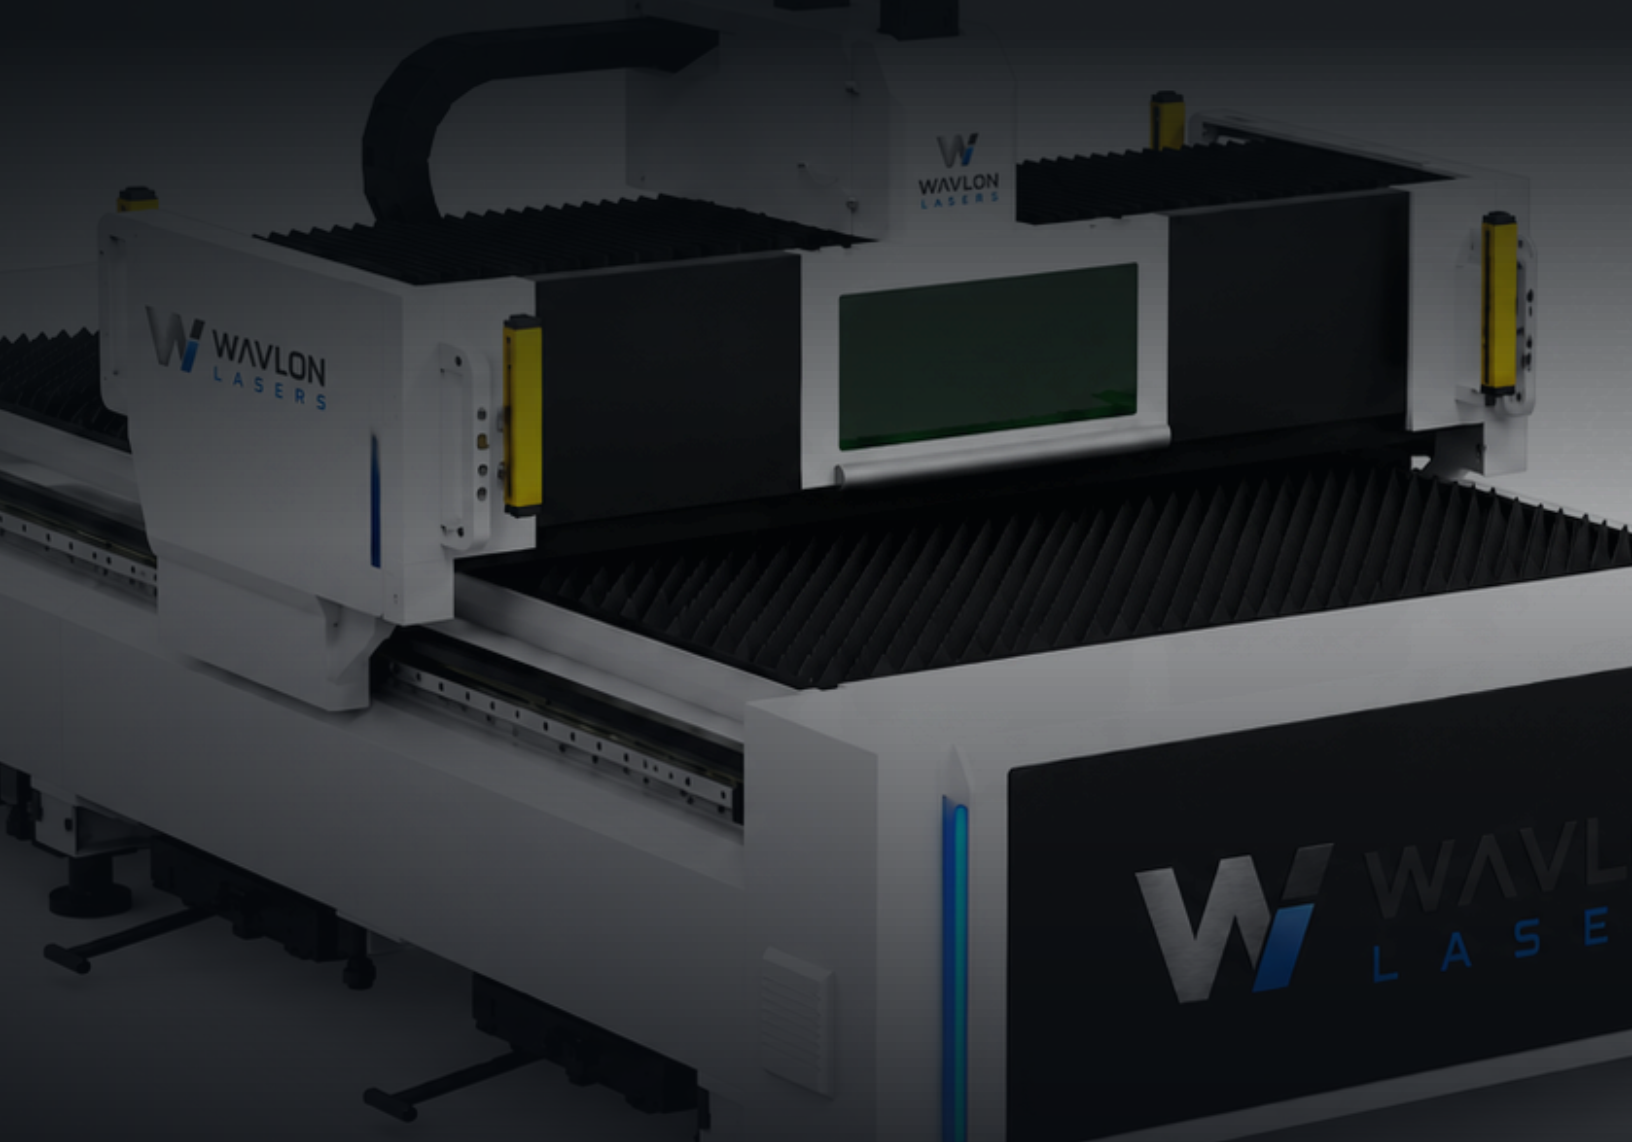

MAX LASER POWER

20 kW

From 3 kW · MAX source

MAX SPEED

100 m/min

1.2 G acceleration

REPEAT PRECISION


±0.02 mm

Per metre

WORK BED

6020 +UL

3015 / 6020 · to 25 m UL

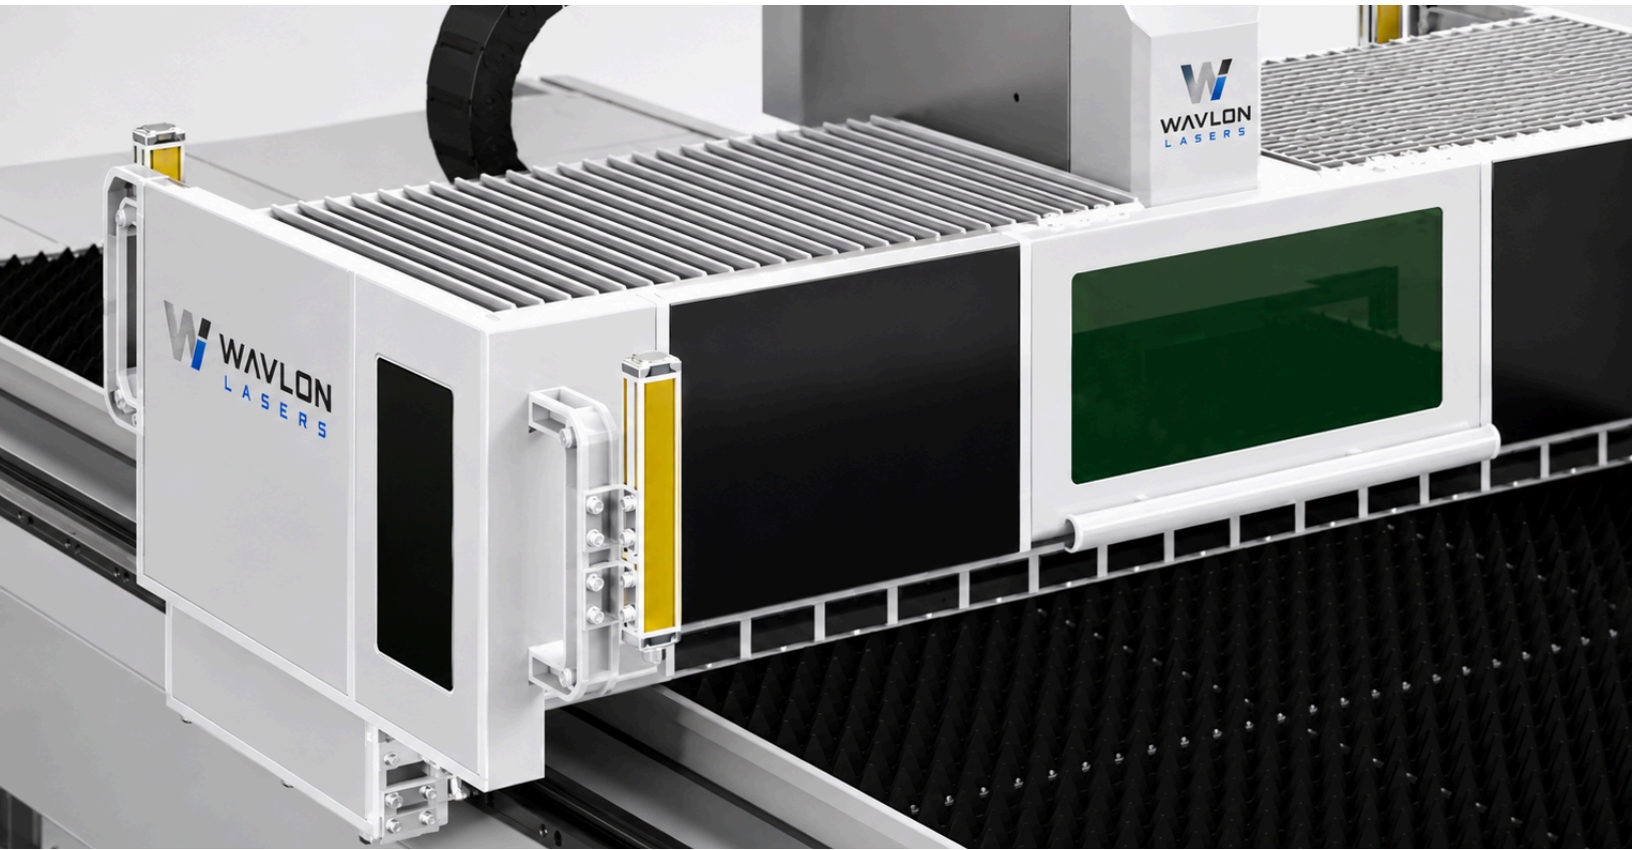

Open-Bed Gantry Design.

A high-rigidity gantry carries the cutting head and cross beam across a fixed, open machine bed. With no surrounding cabin, the operator has clear access from every side — loading raw sheet and clearing finished parts is direct and fast, including large or heavy plate that would be awkward to feed into an enclosure.

Where it counts, the cut stays protected: the head and beam run inside an enclosed gantry hood with an OD-rated viewing window, and high-sensitivity light curtains halt motion before anyone reaches the cutting zone.

— CYCLE

01

Load onto the open bed

Sheet drops straight onto the open slat bed — crane, forklift, or by hand, from any side.

02

Gantry traverses & cuts

The enclosed head and beam track the program at up to 100 m/min while light curtains guard the zone.

03

Clear & reload

Finished parts and skeleton lift straight off the open bed for a fast turnaround to the next sheet.

High-Sensitivity Light Curtains.

With an open bed, safety is built into the gantry itself. High-sensitivity light safety curtains screen the cutting zone and halt motion the instant the beam is broken, while a green status beacon signals machine state across the floor and the head and beam stay shielded inside the enclosed hood. Designed to meet North American safety requirements, including CSA standards.

SAFETY — AT A GLANCE

01 High-sensitivity curtains

Light curtains screen the cutting zone and stop all motion the instant the beam is broken.

02 Green status beacon

A full-height signal strip shows machine state — running, idle, or fault — at a glance across the floor.

03 OD-rated viewing window

The enclosed hood carries a radiation-shielded window so the cut stays visible without exposure.

04 E-stop & interlocks

Emergency stop and motion interlocks back up the curtains for layered operator



Light curtains

High-sensitivity safety curtains halt motion before anyone reaches the cutting zone — protection without a full enclosure.



Status beacon

A full-height status light reports running, idle, and fault states clearly across a busy shop floor.



OD-rated window

The enclosed gantry hood keeps the cutting head and beam shielded behind a radiation-rated viewing window.

Built into the body, *organised for service.*

The electrical cabinet folds into the machine body — no separate floor-standing enclosure to place or wire — with components laid out in clear tiers for fast diagnosis and service.



01 · INSIDE THE CABINET


Built-in Electrical Cabinet.

Drives, source bay, breakers, and control electronics are arranged in clearly organised tiers behind a sealed door — every component visible and reachable for quick diagnosis. A full-height green beacon on the cabinet face reports machine status across the floor.

02 · TIDY FOOTPRINT

Integrated, Compact Footprint.

Because the cabinet is integrated into the machine base rather than standing alongside it, the ProCut occupies less floor and installs with fewer external runs — power and control stay contained within the machine body, keeping the shop floor clear around the open bed.

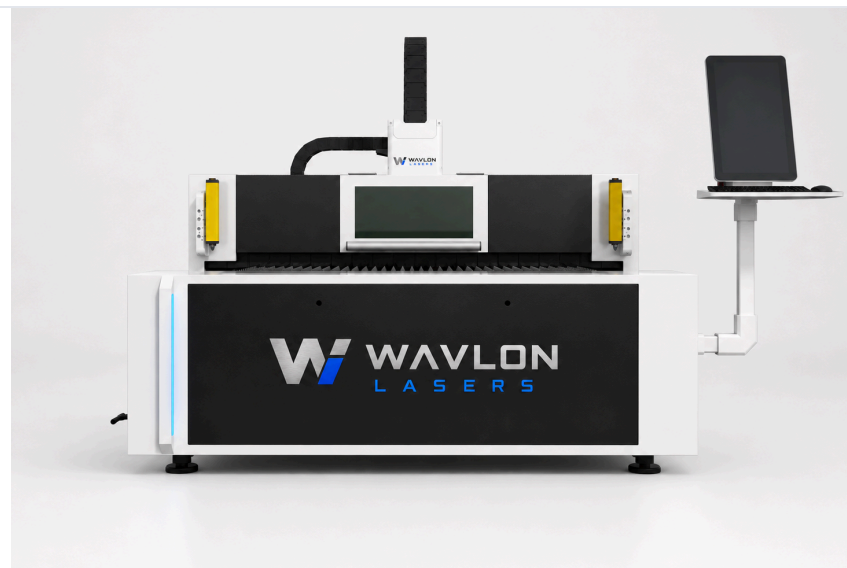

Engineered for Rigidity.

The machine bed is an in-house welded structure, annealed to release internal stress, with reinforced rib plates and mortise-and-tenon joints. The cross beam is high-strength steel, tempered for thermal stability under heavy cutting — so the ProCut holds dimensional accuracy through extended production.



STRUCTURE — AT A GLANCE

- 01 Annealed welded bed**
Stress-relieved welded structure minimises deformation for long-term accuracy and durability.
- 02 Reinforced rib plates**
Internal mortise-and-tenon ribs add rigidity and suppress vibration at high-speed travel.
- 03 High-strength steel beam**
Integrated, tempered steel cross beam holds accuracy under thermal load during heavy cutting.
- 04 Welded plate frame**
Metal-plate welded construction forms a stable, rigid base for consistent long-term accuracy.



Steel slat work bed

Replaceable steel support slats carry the sheet across the open bed and swap out quickly once consumed.



Slag collection drawers

Pull-out trays beneath the bed catch dross and offcut for fast, low-labour cleanout between jobs.



Hardened guides & rack

Precision linear guides with helical rack-and-pinion drive carry the gantry smoothly at full speed.

BOCI BLT cutting heads.

The laser head is one of the most important parts of any cutting machine. Each ProCut power tier ships with the matched **BOCI BLT cutting head** — from the BLT-310 up to high-power BLT heads — with fast focusing, collision protection, protective-window monitoring, and water cooling. **Precitec head integration is available** on request.



FIG. 01 — BOCI BLT CUTTING HEAD ASSEMBLY · REPRESENTATIVE MODEL

EXPLODED VIEW



PROTECTIVE LENS



POWER	BLT HEAD	NOTES
3 kW	BLT-310	Thin-gauge fidelity, fast focus
6 kW	BLT-421S	Mid-range work-horse head
12 kW	BLT-442	Thick-plate, adaptive standoff
20 kW	BLT high-power	Maximum thickness & throughput
Opt.	Precitec	Premium integration on request



Cypcut & Hypcut Control.

Windows-native CNC software on a 27-inch internal-design console — nesting, edge searching, range checking, and live cut monitoring in one operator-facing interface, with DXF / DWG / AI import.

- FSCUT2000E / 4000E / 8000 controllers matched to power tier
- Cypnest nesting software included on higher-power models
- Automatic calibration and one-click edge search
- 27" touchscreen — internal design, operator-facing

LASER SOURCE MAX FIBER LASER	SERVO MOTOR Yaskawa JAPAN	LINEAR GUIDE RAIL ROUST GERMANY	HELICAL RACK Eblun TAIWAN
REDUCER TECHMECH PRECISION DRIVE	ELECTRICAL Schneider · ABB FRANCE	PNEUMATIC / GAS SMC PNEUMATICS	WATER CHILLER S&A PROCESS COOLING

Choose your *bed size*.

Every ProCut shares the same open-bed gantry, enclosed cutting head, welded bed, motion package, and component lineup — and scales from 3 to 20 kW on any frame. Pick the bed that matches your sheet.

MOST POPULAR		
COMPACT	MOST POPULAR	ULTRA LARGE
3015	6020	UL
WPC-3015 · 3.0 × 1.5 m	WPC-6020 · 6.0 × 2.0 m	WPC-UL · 14 / 25 m
Bed 3000 × 1500	Bed 6000 × 2000	Bed 14 / 25 × 3.5 m
Power 3 – 20 kW	Power 3 – 20 kW	Power 3 – 20 kW
Speed 100 m/min	Speed 100 m/min	Format Custom length
For General job shop	For Large-sheet work	For Plate & structurals


Custom beds & power levels — available on request.

Beyond the standard 3015 and 6020 frames, ProCut UL is built to length for ultra-large-format plate — 14 m and 25 m tables on a 3.5 m width — and any frame can be matched with a 3–20 kW source, head, control, and chiller package. Contact sales for configuration and lead-time.

WPC · UL / CUSTOM
BY QUOTATION

ProCut *UL* — Ultra Large Format.

For oversized plate and structural work, ProCut UL stretches the same open-bed gantry onto an ultra-large-format bed — the same enclosed cutting head and 3–20 kW power range, built to length on a 3.5 m width.

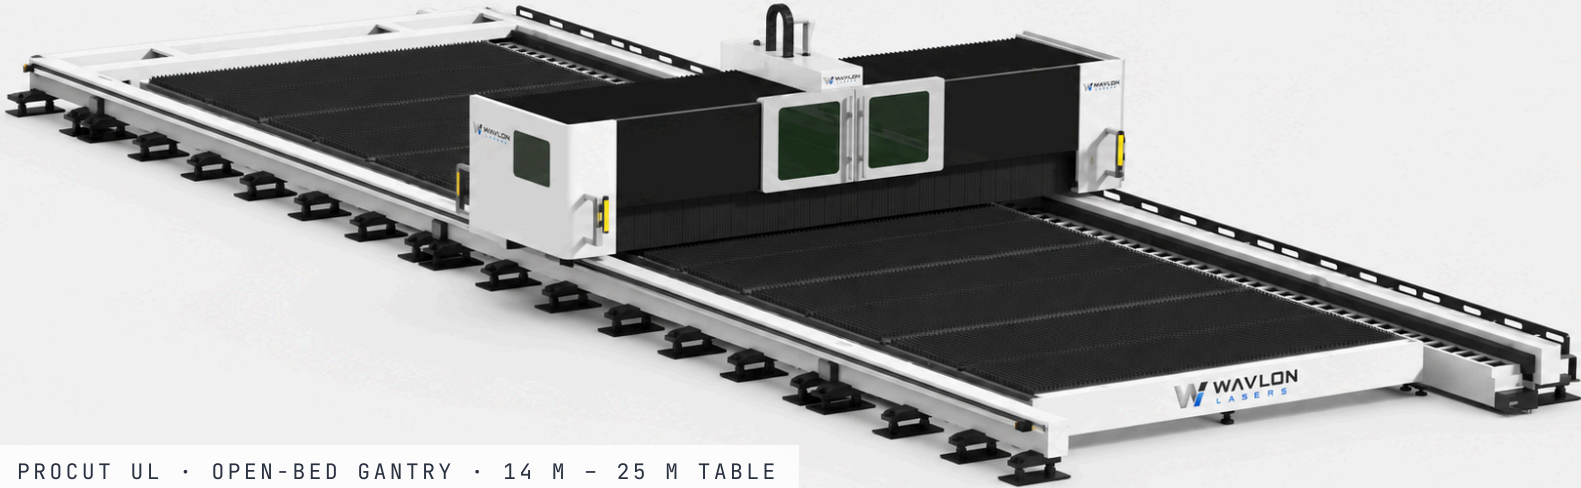

PROCUT UL · OPEN-BED GANTRY · 14 M – 25 M TABLE

LONG BED

14 × 3.5 m

WPC-UL-14

Long-format plate and oversized sheet on a single bed.

MAXIMUM LENGTH

25 × 3.5 m

WPC-UL-25


Maximum table length for structurals and big-batch nesting.

Built to your **length**.

UL beds are configured to spec with a matched source from 6 kW up to 200 kW, head, and motion package. Full ultra-large-format data sheet on the following page.

WPC-UL · BY QUOTATION

UL profiles & *specifications.*

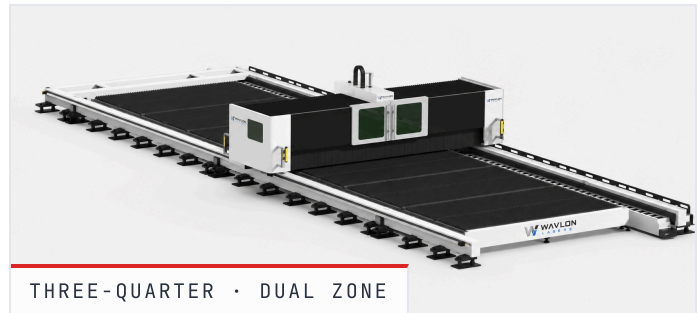

ProCut UL — Ultra Large Format

Built-to-length open-bed gantry · dimensions in millimetres

WPC - UL

WORKING AREA	14000 × 3500	25000 × 3500
Laser Power	6 – 200 kW	6 – 200 kW
X/Y Positioning Accuracy	±0.05 mm/m	±0.05 mm/m
X/Y Repeat Positioning Accuracy	±0.05 mm/m	±0.05 mm/m
Maximum Movement Speed	100 m/min	100 m/min
Maximum Acceleration	0.8 G	0.8 G
Z-Axis Travel	200 mm	300 – 500 mm

ProCut UL scales the open-bed gantry to **14 m and 25 m tables on a 3.5 m width**, matched with a source from **6 kW up to 200 kW** for heavy plate and structural work. Beds, power, and Z-travel are configured to spec — contact sales@wavlonlasers.com for the current UL data sheet and lead-time.

ProCut WPC — Standard Beds

3015 / 6020 open-bed gantry platform · UL ultra-large-format on the previous page

WPC

SPECIFICATION	WPC-3015	WPC-6020
Laser Power	3 - 20 kW	3 - 20 kW
Working Area	3000 × 1500	6000 × 2000
X/Y Positioning Accuracy	±0.03 mm/m	±0.03 mm/m
X/Y Repeat Accuracy	±0.02 mm/m	±0.02 mm/m
Max Speed	100 m/min	100 m/min
Max Acceleration	1.2 G	1.2 G
Z-Axis Travel	120	120
Laser Head	B0CI BLT	B0CI BLT
Control System	Cypcut / Hypcut	Cypcut / Hypcut
Nesting Software	Optional	Optional

Common Specifications — All ProCut Models

LASER SOURCE	MAX	MACHINE FRAME	Welded metal plate
SERVO MOTOR	Yaskawa (Japan)	MACHINE BEAM	Steel
REDUCER	TECHMECH	ENCLOSURE	Enclosed head & beam
LINEAR GUIDE RAIL	ROUST (Germany)	TABLE TYPE	Open fixed bed
HELICAL RACK	Eblun (Taiwan)	OPERATING VOLTAGE	380 V / 3-ph / 60 Hz
ELECTRICAL	Schneider & ABB (FR)	SOFTWARE	Cypcut / Hypcut
PNEUMATIC / GAS	SMC	SCREEN	Operator console
WATER CHILLER	S&A	CERTIFICATION	FDA & CE / CSA

Positioning accuracy ±0.03 mm/m · Repositioning accuracy ±0.02 mm/m · Calibration automatic. Cutting capacity depends on laser power, gas, and material. **Custom power and ultra-large-format beds available on request** — contact sales@wavlonlasers.com for the most current data sheet.

ProCut • PowerCut • UltraCut.

Three Wavlon sheet platforms cover entry-level through flagship production. ProCut is the entry-level workhorse — an open-bed gantry with an enclosed cutting head, scaling from a compact 3015 frame to ultra-large-format UL beds.

	THIS CATALOG		
SHEET-CUTTING SERIES	WPC • ENTRY ProCut Open-bed gantry with enclosed head. 3015 / 6020 + UL.	WFC • MID PowerCut Enclosed mid-tier with single automatic pull-out table.	WUC • FLAGSHIP UltraCut Flagship dual-exchange production. Widest power range, both frames.
POWER RANGE	3 – 20 kW • UL to 200 kW	3 – 12 kW	3 – 20 kW • to 160 kW POA
MAX ACCELERATION	1.2 G	1.2 G	1.2 G
MAX SPEED	100 m/min	120 m/min	120 m/min
BEDS / FRAMES	3015 / 6020 / UL	3015 only	3015 / 4020
ENCLOSURE	Enclosed head & beam	Full enclosed cabin	Full enclosed cabin
TABLE TYPE	Open fixed bed	Single auto pull-out	Dual exchange shuttle
BEST FOR	Entry-level workhorse	Enclosed mid-tier	Flagship production

POA = Price on Application. Full spec sheets for each series are available on request from sales@wavlonlasers.com.



CANADIAN SALES & SUPPORT

Industrial-grade laser cutting, backed by Canadian *service.*

Wavlon Lasers builds, installs, and supports fiber laser cutting machines from Toronto. Sales, installation, training, parts, and long-term service — engineered for North American shop floors. Get a configuration and quote within one business day.

CSA-ALIGNED

1 YR ONSITE WARRANTY

PARTS WARRANTY

SALES · QUOTES

sales@wavlonlasers.com

+1 (888) 277-6144

Mon-Fri · 8am – 6pm EST

OFFICE

Toronto, Ontario

Canada

ONLINE

wavlonlasers.com