Computer Exercise 1 EL2520 Control Theory and Practice

 $\begin{array}{c} \text{Jane Doe} \\ \text{x@kth.se} \\ \text{YYMMDD-NNNN} \end{array}$

 $\begin{array}{c} {\rm John~Doe} \\ {\rm y@kth.se} \\ {\rm YYMMDD\text{-}NNNN} \end{array}$

March 22, 2019

Disturbance attenuation

How should the extra poles be chosen in exercise 4.2.1? Motivate!

The feedback controller in exercise 4.2.2 is

$$F_y(s) = \dots$$



Figure 1: Step disturbance, exercise 4.2.2

The feedback controller and prefilter in exercise 4.2.3 is

$$F_y(s) = \dots$$

$$F_r(s) = \dots$$

Did you manage to fulfill all the specifications? If not, what do you think makes the specifications difficult to achieve?

.....



Figure 2: Reference step, exercise 4.2.3



Figure 3: Control signal for a disturbance or a reference step (plus a combination of these)

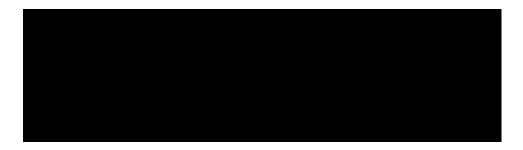


Figure 4: Bode diagram of sensitivity and complementary sensitivity functions, exercise $4.2.4\,$