Chapter 8: Main Memory

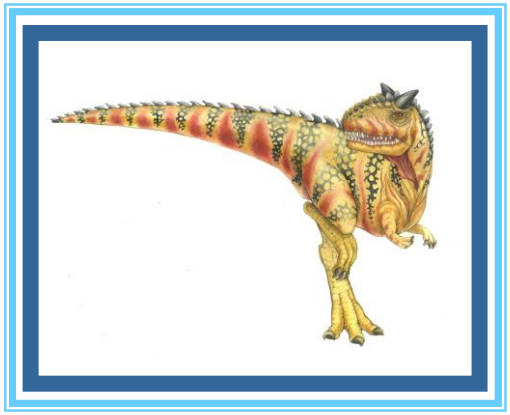

Chapter 8: Memory Management

- Background
- Swapping
- Contiguous Memory Allocation
- Segmentation
- Paging
- Structure of the Page Table
- Example: The Intel 32 and 64-bit Architectures
- Example: ARM Architecture

Paging

- Physical address space of a process can be noncontiguous; process is allocated physical memory whenever the latter is available
  - Avoids external fragmentation
  - Avoids problem of varying sized memory chunks
- Divide physical memory into fixed-sized blocks called **frames**
  - Size is power of 2, between 512 bytes and 16 Mbytes
- Divide logical memory into blocks of same size called **pages**
- Keep track of all free frames
- To run a program of size ***N*** pages, need to find ***N*** free frames and load program
- Set up a **page table** to translate logical to physical addresses
- Backing store likewise split into pages
- Still have Internal fragmentation

Address Translation Scheme

- Address generated by CPU is divided into:
  - **Page number** (*p*) – used as an index into a **page table** which contains base address of each page in physical memory
  - **Page offset** (*d*) – combined with base address to define the physical memory address that is sent to the memory unit

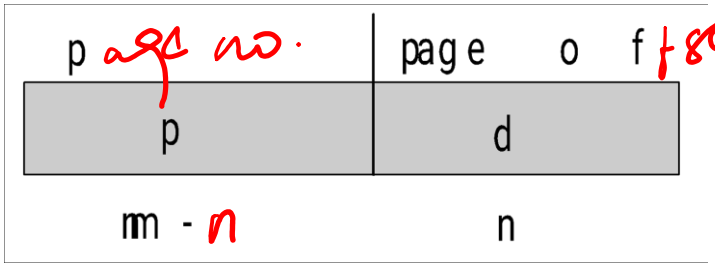

  - For given logical address space 2^m and page size 2^n



Paging Hardware

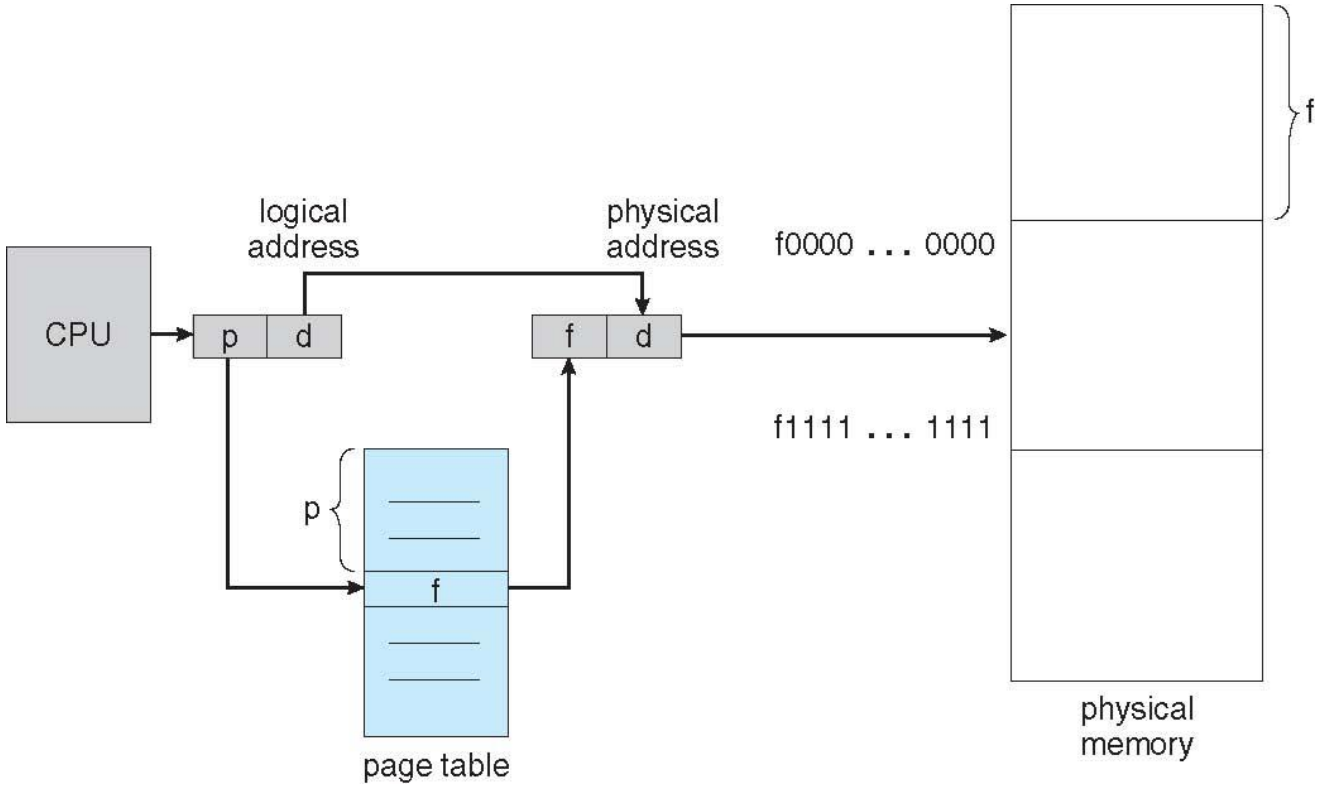

Paging Model of Logical and Physical Memory

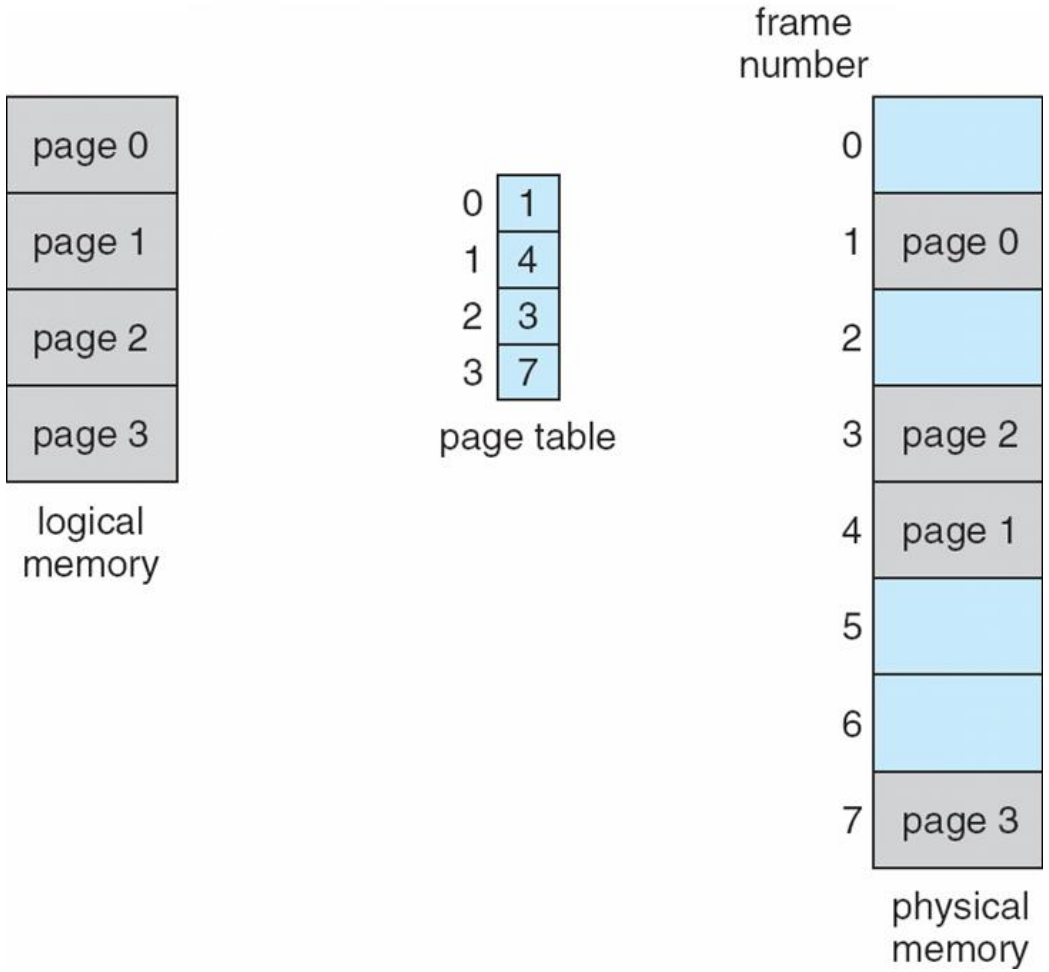

Paging Example

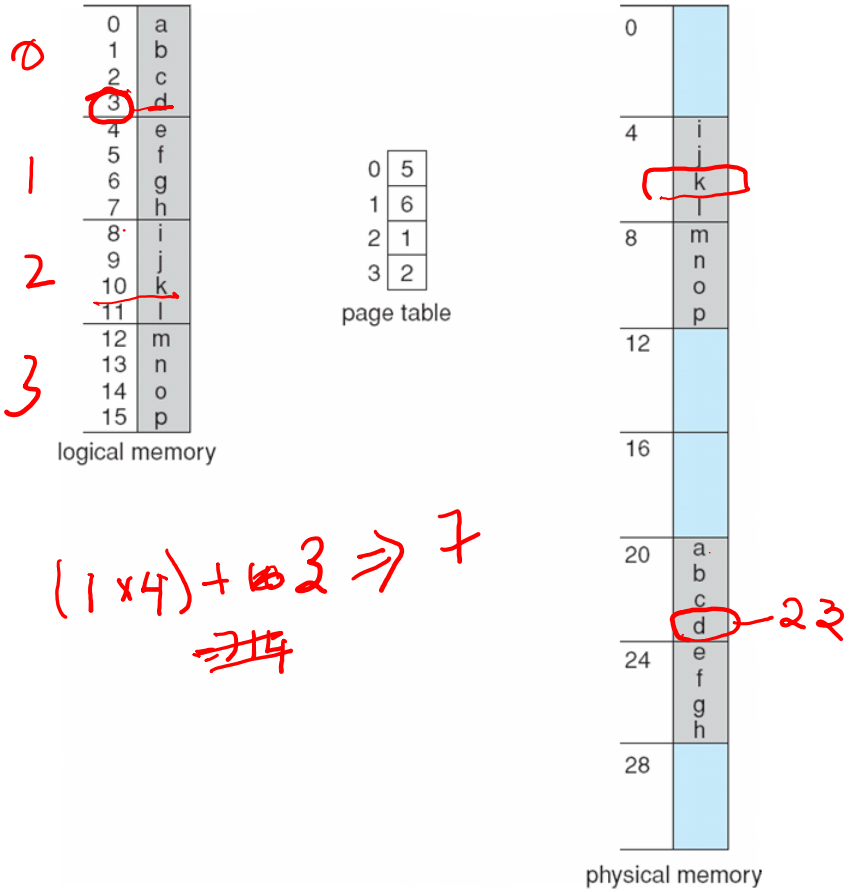

n=2 and m=4 32-byte memory and 4-byte pages

Paging Example Problem -1

Given
Logical address space = 4GB
Physical address space = 64GB
Page size = 4KB

Find out the number of pages, number of frames and number of entries in the page table, number of bits in logical address and physical address.

Number of pages = 4GB/4KB = 2^20
Number of frames = 64GB/4KB = 2^32
Number of entries in the page table = 2^20
Number of bits in LA = 32bits
Number of bits in PA = 36bits



Paging Example Problem -2

Given

A system has Logical address represented using 7 bits, physical address representing 6 bits and page size as 8 bytes. Calculate the number of pages and number of frames.

Number of bits used to represent page offset = 3bits (page size = 8byte = 2^3 bytes)
Number of bitas to represent page number = 7-3 =4bits
Number of pages = 2^4 = 16

Number of bits to represent frame number = 6-3 = 3bits.
So number of frames = 2^3 = 8

Paging (Cont.)

- Calculating internal fragmentation
  - Page size = 2,048 bytes
  - Process size = 72,766 bytes
  - 35 pages + 1,086 bytes
  - Internal fragmentation of 2,048 - 1,086 = 962 bytes
  - Worst case fragmentation = 1 frame – 1 byte
  - On average fragmentation = 1 / 2 frame size
  - So small frame sizes desirable?
  - But each page table entry takes memory to track
  - Page sizes growing over time
    - Solaris supports two page sizes – 8 KB and 4 MB
- Process view and physical memory now very different
- By implementation process can only access its own memory



Free Frames

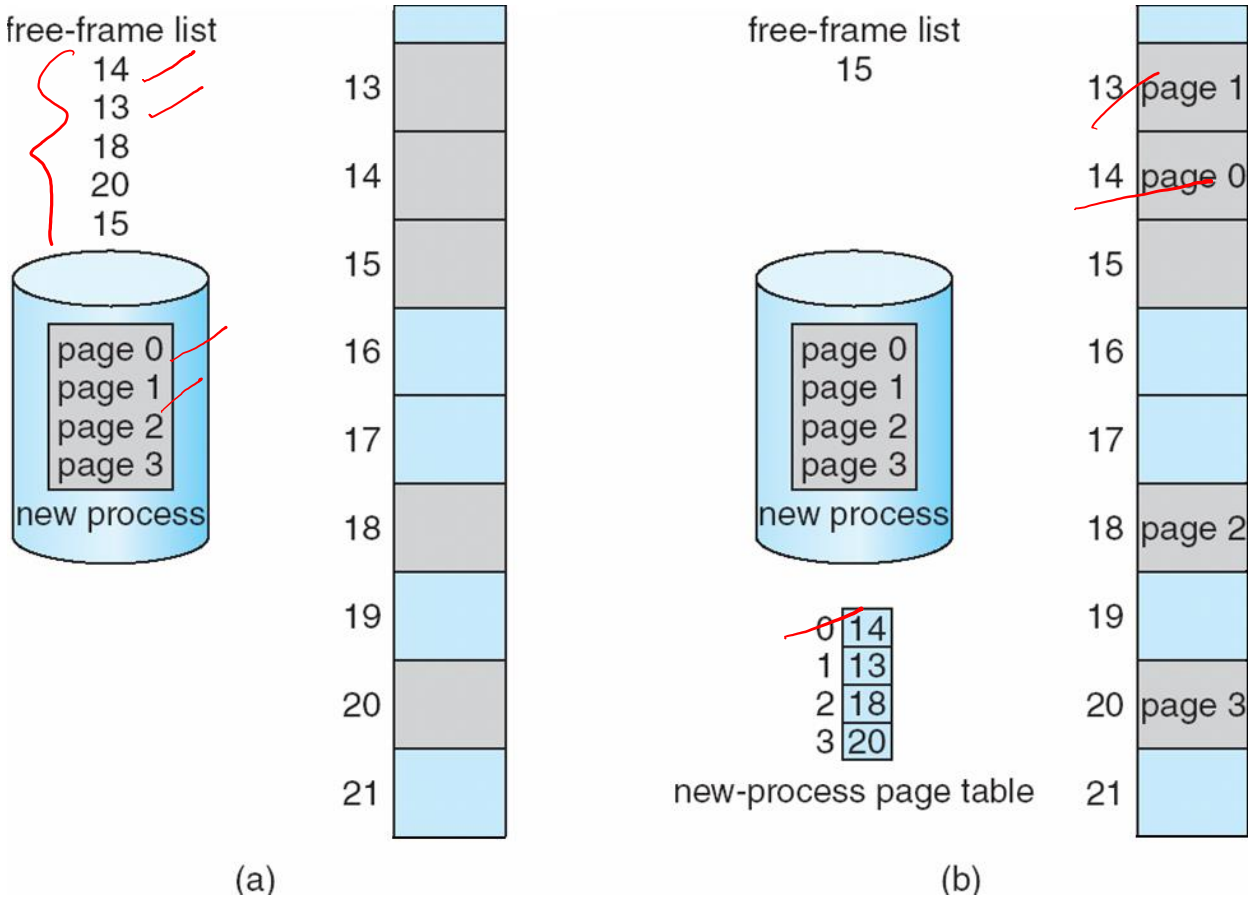

Before allocation

After allocation

Implementation of Page Table

- Page table is kept in main memory
- **Page-table base register** (**PTBR**) points to the page table
- **Page-table length register** (**PTLR**) indicates size of the page table
- In this scheme every data/instruction access requires two memory accesses
  - One for the page table and one for the data / instruction
- The two memory access problem can be solved by the use of a special fast-lookup hardware cache called **associative memory** or **translation look-aside buffers** (**TLBs**)



Associative Memory

- Associative memory – parallel search

Page #	Frame #

- Address translation (p, d)
  - If p is in associative register, get frame # out
  - Otherwise get frame # from page table in memory

Paging Hardware With TLB

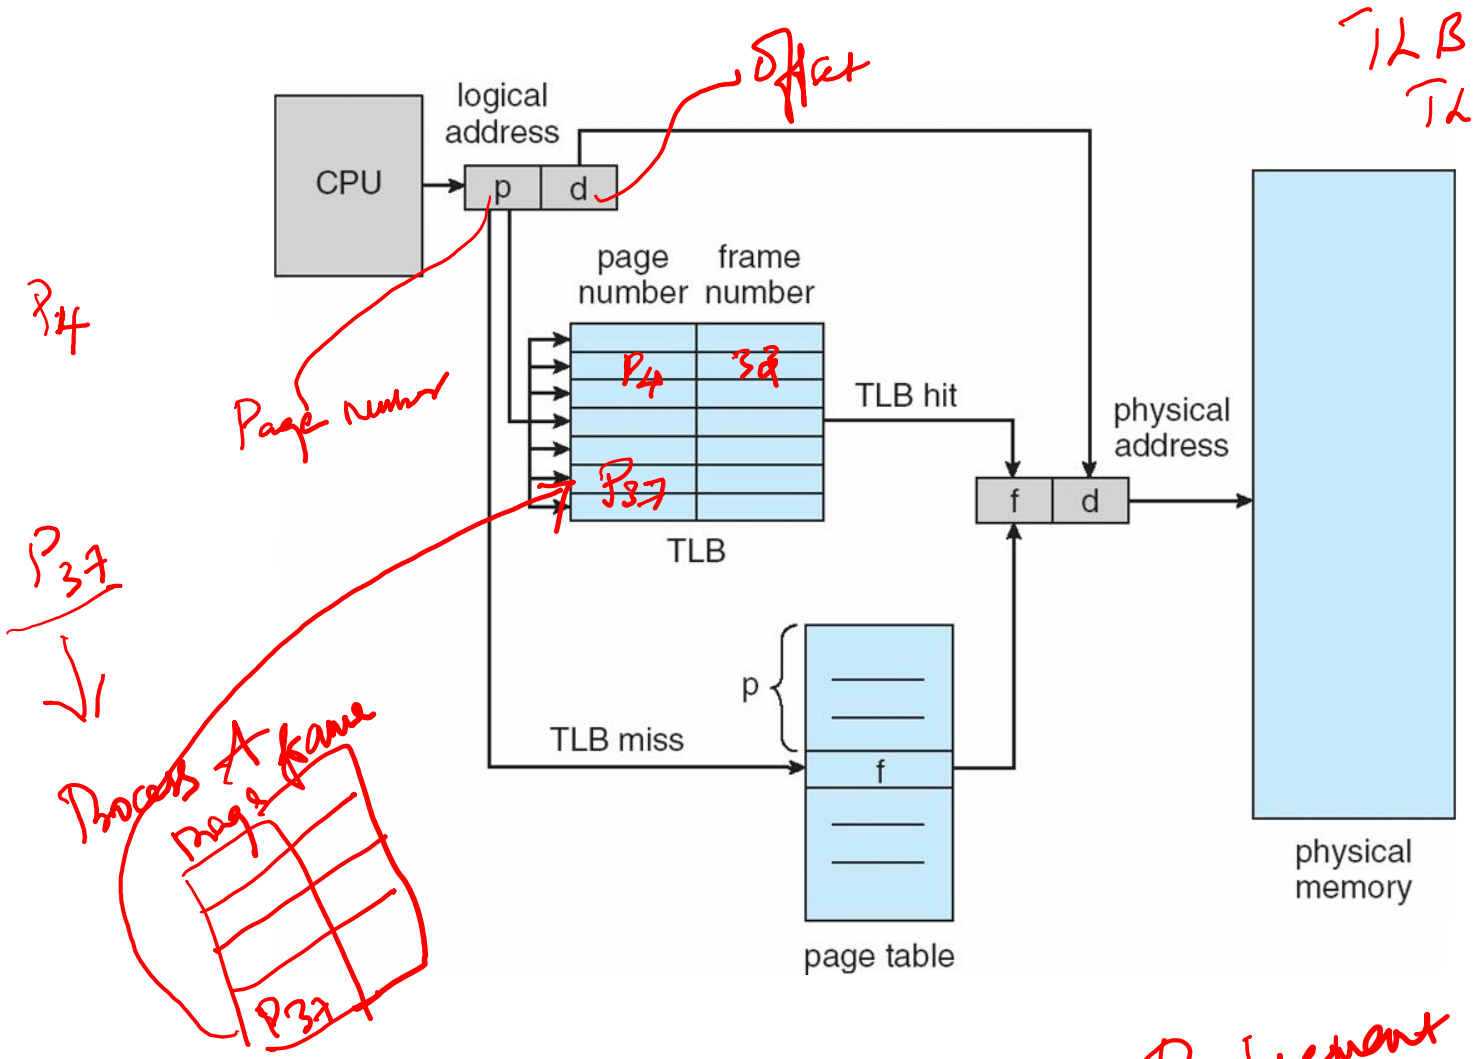

Effective Access Time

- Associative Lookup = ε time unit
  - Can be < 10% of memory access time
- Hit ratio = α
  - Hit ratio – percentage of times that a page number is found in the associative registers; ratio related to number of associative registers
- Consider α = 80%, ε = 20ns for TLB search, 100ns for memory access
- **Effective Access Time** (**EAT**)
- Consider α = 80%, ε = 20ns for TLB search, 100ns for memory access
  - EAT = 0.80 x 120 + 0.20 x 220 = 140ns
- Consider more realistic hit ratio -> α = 99%, ε = 20ns for TLB search, 100ns for memory access
  - EAT = 0.99 x 120 + 0.01 x 220 = 121ns



Memory Protection

- Memory protection implemented by associating protection bit with each frame to indicate if read-only or read-write access is allowed
  - Can also add more bits to indicate page execute-only, and so on
- **Valid-invalid** bit attached to each entry in the page table:
  - "valid" indicates that the associated page is in the process' logical address space, and is thus a legal page
  - "invalid" indicates that the page is not in the process' logical address space
  - Or use **page-table length register** (**PTLR**)
- Any violations result in a trap to the kernel

Valid (v) or Invalid (i) Bit In A Page Table

14 bit address space (0 to 16383)

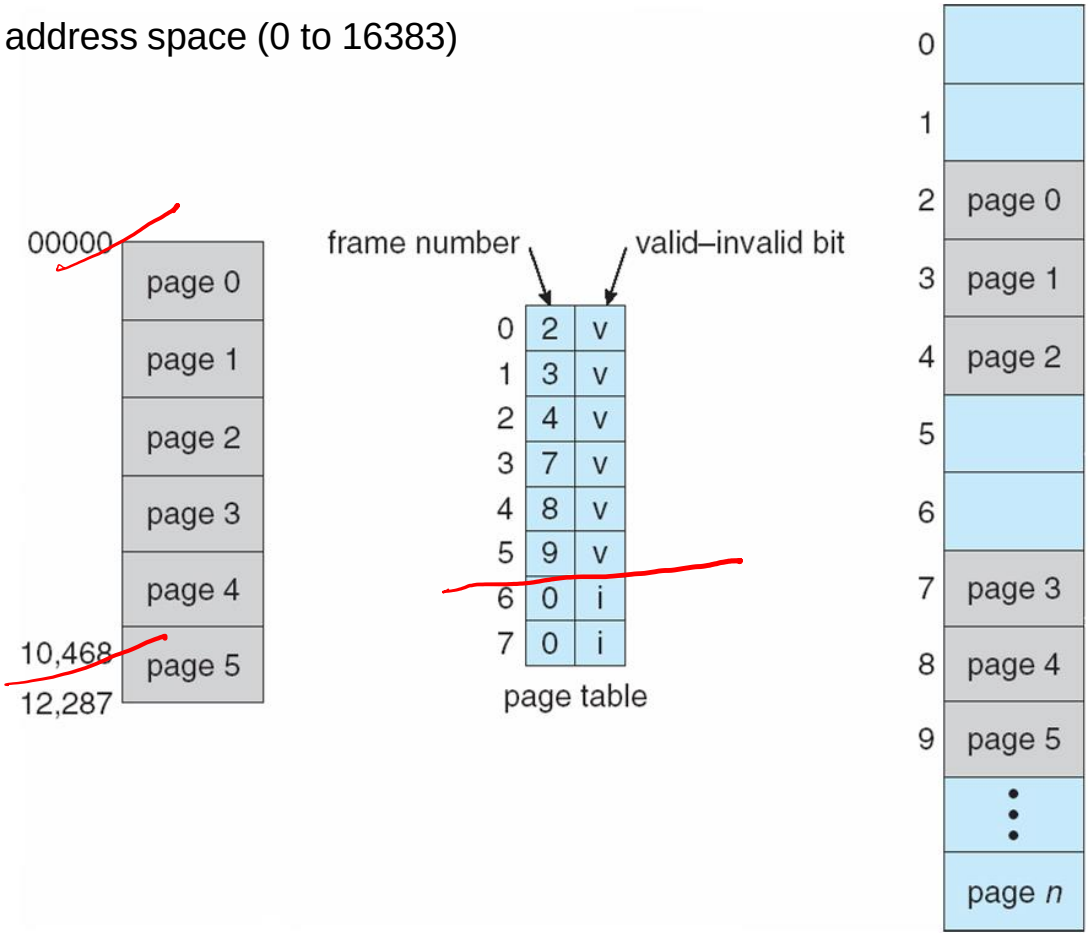



End of Chapter 8