


USB-C, protection and 3.283 V supply

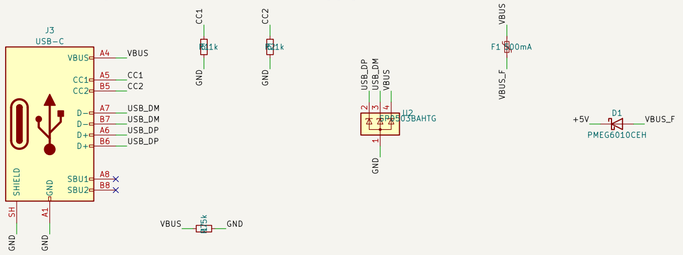


RL78/G13 supplies and 32.768 kHz subclock

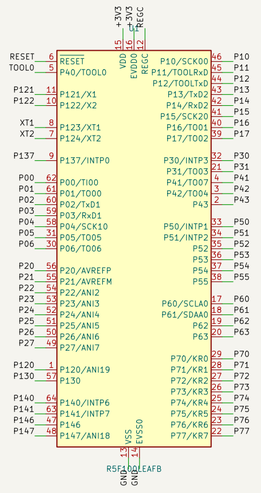


30-pin expansion hea




USB UART2: P13 TX / P14 RX

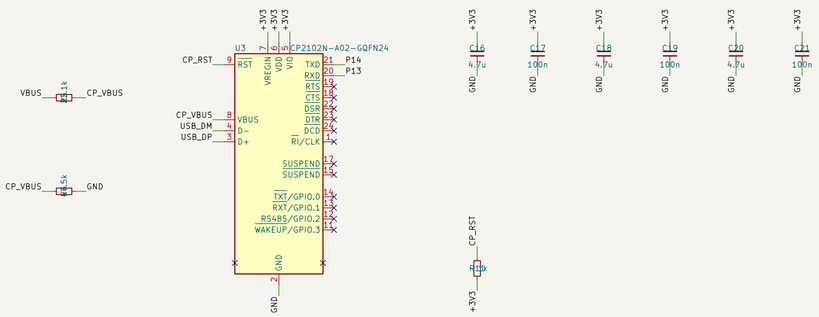

External E1/E2 TOOL0 and reset selection

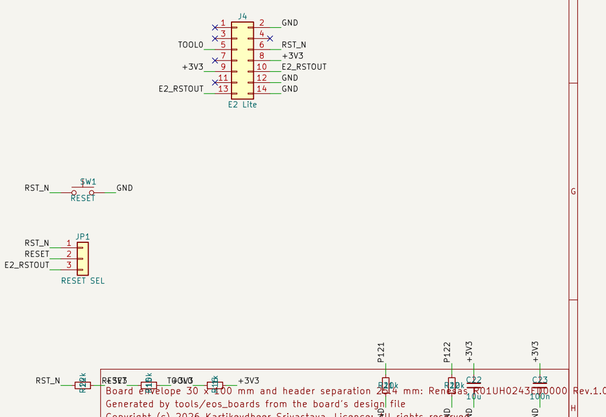



Board envelope 30 x 100 mm and header separation 2.54 mm: Renesas R01UH0243EJ0000 Rev.1.0 p.
Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: all rights reserved.

Kartikeydheer Srivastava		
Sheet: /		
File: eos-rl78g13-board.kicad_sch		
Title: EoS RL78G13 Board		
Size: A2	Date: 2026-10-12	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1