


CM5 connectors (pins 1–100, 101–200)

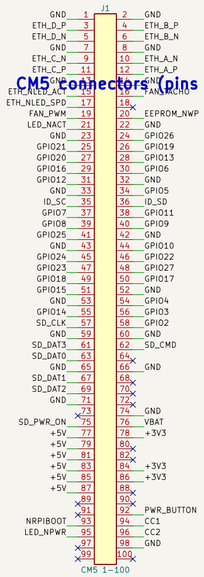


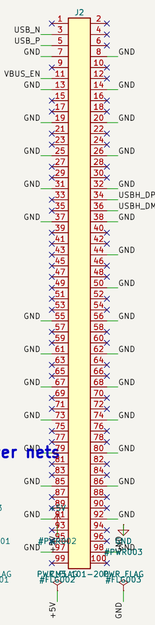


Power nets




CM5 mounting holes




USB-C: power in, USB 2.0 device

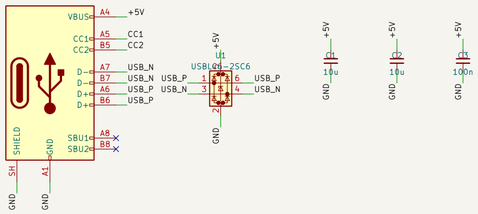



USB-A host (USB 3.0 port 0's USB 2.0 pair)

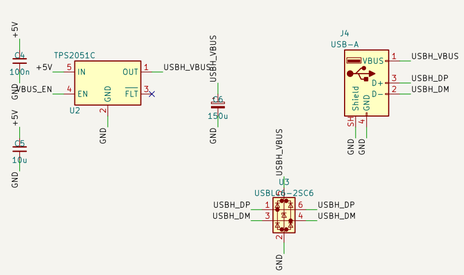


Gigabit Ethernet









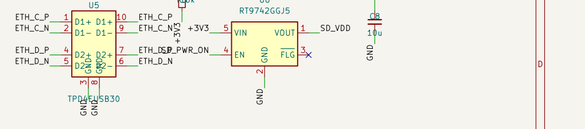

microSD (CM5 Lite)




40-pin GPIO header




Fan, RTC battery, power button, boot jumpers










LEDs



EoS CM5 Base, rev A. Designed by Kartikeydheer Srivastava.
Copyright (c) 2026 Kartikeydheer Srivastava. All rights reserved; see LICENSE.txt.
Pin nets per the CM5 datasheet (table 4); choices the datasheet leaves open follow Raspberry Pi's CM5IO.
No HDMI, PCIe, USB 3.0 SuperSpeed or MIPI: they need impedance-controlled, length-matched pairs.

CM5 connector and mounting-hole positions and the CM5 pinout: Raspberry Pi CM5 datasheet and CM
Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved
Kartikeydheer Srivastava

Sheet: /		
File: eos-cm5-base.kicad_sch		
Title: EoS CM5 Base		
Size: A2	Date: 2026-10-11	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1