
USB-C, ESD, bleed, fuse, Schottky



3.3 V LDO

Supply choice (one shunt) + Power LED

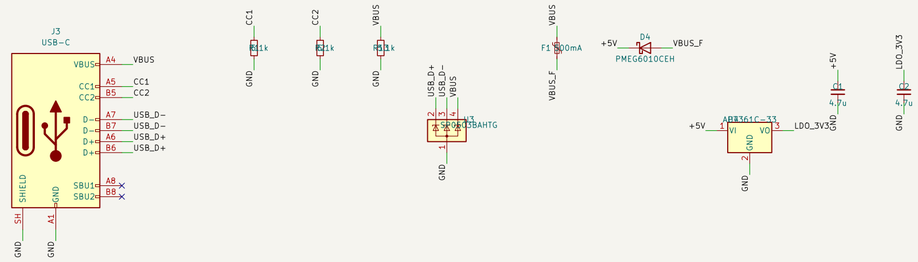


MCU current jumper


BoosterPack headers (TI 20-pin standard)






CP2102N USB-UART (regulator unused)






UART jumpers, TXD series resistor

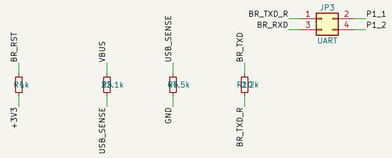


MSP430G2553 in a DIP-20 socket

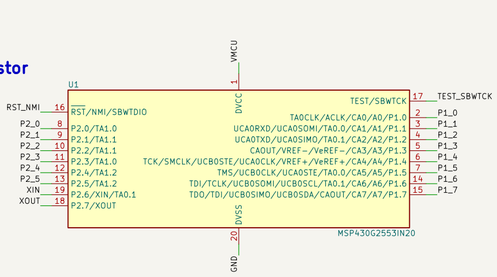


DVCC decoupling, RST/NMI (SLAU278 Fig. 2-2)







32.768 kHz crystal, XCAPx = 00




Power nets



MSP-FET Spy-Bi-Wire connector



User LEDs and button

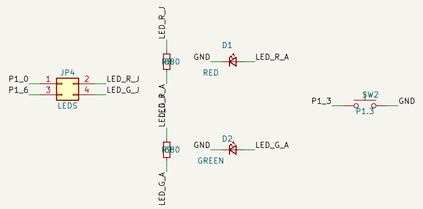

Mounting holes



EoS MSP430G2 Board, rev A. BoosterPack-compatible (20-pin). Designed by Kartikeydheer Srivastava.
Copyright (c) 2026 Kartikeydheer Srivastava. All rights reserved; see LICENSE.txt.
Values from TI SLAS735J, SLAU144K, SLAU278AH, SLAU647D, SLAA322D; Silicon Labs CP2102N Rev. 1.5;
Diodes DS37274 (AP7361C); Nexperia PMEG6010CEH v.4; Littelfuse 1206L and SP05xxBA; Abracon ABS07;
Kingbright. 16 MHz only with VCC >= 3.3 V (SLAS735J); 12 MHz from the LDO for full margin.
JP1 (one shunt): 1-2 USB/LDO powers +3V3, 2-3 MSP-FET VCC_TOOL powers +3V3.
JP2 off = measure the MCU alone. Firmware: XCAPx = 00 for Y1 with C10/C11.

BoosterPack J1/J2 positions (1.8 in apart, 0.1 in grid, J1.1 and J2.20 level) and signal assignment f
Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved
Kartikeydheer Srivastava

Sheet: /
File: eos-msp430g2-board.kicad_sch

Title: EoS MSP430G2 Board

Size: A2	Date: 2026-10-12	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1