

USB-C input and ESD protection

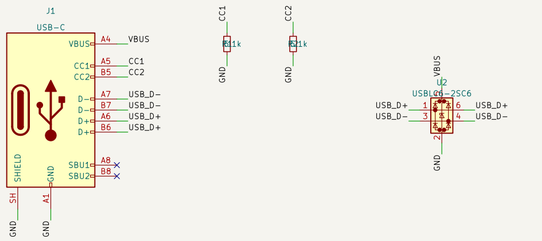


Fuse and 3.3 V regulator

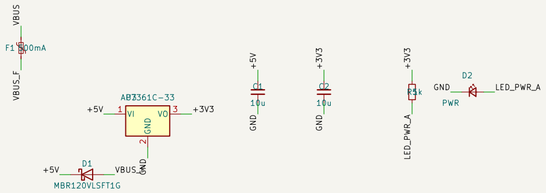


Power LED


QSPI flash and BOOTSEL

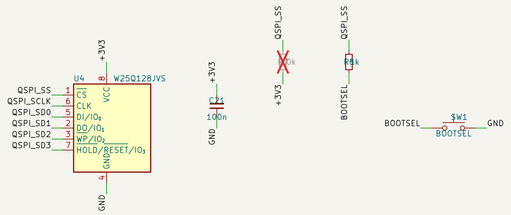


2.54 mm headers



USB series termination (at the chip)



RP2350A

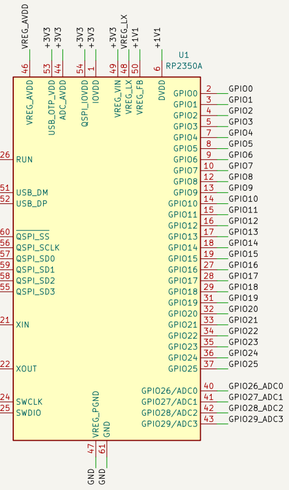


Core regulator: place exactly as the datasheet shows




12 MHz crystal (ABM8-272-T3)



Reset



User LED (GPIO25)




100 nF decoupling, one per supply pin



SWD and Qwiic (I2C0)



Power nets



Mounting holes



EoS Learn RP2350, rev A. Designed by Kartikeydheer Srivastava.
Copyright (c) 2026 Kartikeydheer Srivastava. All rights reserved; see LICENSE.txt.
Circuit values follow Raspberry Pi's 'Hardware design with RP2350' and the RP2350 datasheet.
Core regulator: L1 3.3 uH polarity-marked, C6/C7/C9 4.7 uF, R6 33 ohm, footprints, positions and copper exactly as Raspberry Pi's RP2350A Minimal Design R4 (MIT), as datasheet Figure 26 requires.
Crystal: ABM8-272-T3 with C3/C4 15 pF and R10 1 kohm, tuned for IOVDD = 3.3 V.
R7 (QSPI_SS pull-up) is not fitted, as the guide recommends for the W25Q128JV.

RP2350A core layout (regulator, decoupling, crystal, USB, QSPI): Raspberry Pi RP2350A Minimal Design
Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved
Kartikeydheer Srivastava
Sheet: /
File: eos-learn-rp2350.kicad_sch

Title: EoS Learn RP2350

Size: A2	Date: 2026-10-11	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1