


CM4 connectors (pins 1–100, 101–200)

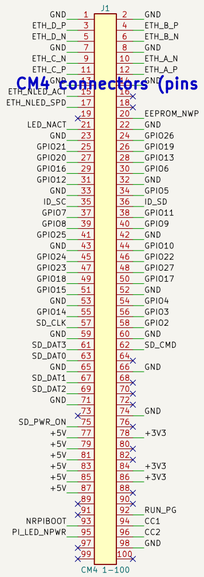


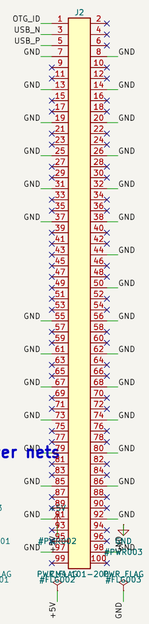


Power nets




CM4 mounting holes




USB-C: power in, USB device







USB-A host

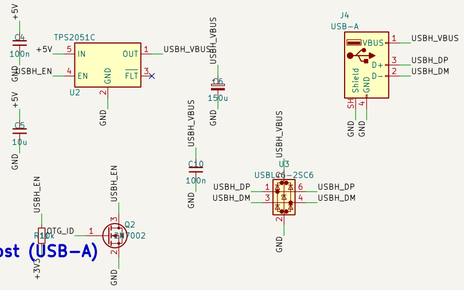


USB 2.0 switch: device (USB-C) or host (USB-A)




Gigabit Ethernet













microSD (CM4 Lite)




40-pin GPIO header




Fan, reset, jumpers






LEDs



40-pin GPIO header

Fan, reset, jumpers



EoS CM4 Base, rev A. Designed by Kartikeydheer Srivastava.
Copyright (c) 2026 Kartikeydheer Srivastava. All rights reserved; see LICENSE.txt.
Pin nets per the CM4 datasheet (section 4). USB_OTG_ID selects host (USB-A) or device (USB-C).
No HDMI, PCIe or MIPI: they need impedance-controlled, length-matched pairs.

Connector and mounting-hole positions: the CM5 footprint in Raspberry Pi's CM5 IO Board files, which
CM4 pinout: Raspberry Pi Compute Module 4 datasheet, section 4 (facts only)
Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved
Kartikeydheer Srivastava

Sheet: /		
File: eos-cm4-base.kicad_sch		
Title: EoS CM4 Base		
Size: A2	Date: 2026-10-12	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1