


USB-C, ESD, fuse

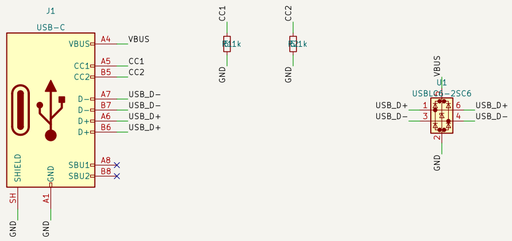


3.3 V LDO (1 A)



Power LED




Level translators: A = 3.3 V, B = target VTref

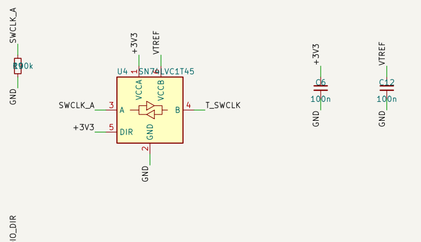


Target reset, VTref sense




ESP32-S3-WROOM-1

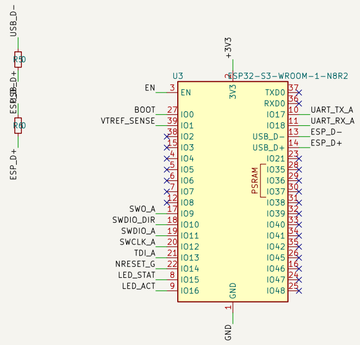


3V3 decoupling and EN delay (Espressif)



LEDs



Target connectors





Power nets



Mounting holes



EoS Probe S3, rev A. Designed by Kartikeydheer Srivastava.
Copyright (c) 2026 Kartikeydheer Srivastava. All rights reserved: see LICENSE.txt.
Values from Espressif's ESP32-S3-WROOM-1 datasheet (section 9), TI SCES515 (SN74LVC1T45), and Diodes Inc. AP7361C. The target sets the I/O voltage through VTref (1.65–5.5 V).

Generated by tools/eos_boards from the board's design file
Copyright (c) 2026 Kartikeydheer Srivastava. Licence: All rights reserved
Kartikeydheer Srivastava
Sheet: /
File: eos-probe-s3.kicad_sch

Title: EoS Probe S3

Size: A2	Date: 2026-10-11	Rev: A
KiCad E.D.A. 10.0.6		Id: 1/1