```
user@kali: ~
Session  Actions  Edit  View  Help
┌──(user㉿kali)-[~]
└─$ ip add
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default q
len 1000
    link/ether 08:00:27:fc:55:66 brd ff:ff:ff:ff:ff:ff
    inet 192.168.1.47/24 brd 192.168.1.255 scope global dynamic noprefixroute eth0
       valid_lft 86302sec preferred_lft 86302sec
    inet6 fe80::a00:27ff:fefc:5566/64 scope link noprefixroute
       valid_lft forever preferred_lft forever

┌──(user㉿kali)-[~]
└─$
```

Capturing from eth0

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

icmp && (eth.src == 08:00:27:fc:55:66 || eth.dst == 08:00:27:fc:55:66)

No.	Time	Source	Destination	Protocol	Length	Info

Command Prompt

```
C:\Users\user>ipconfig

Windows IP Configuration


Unknown adapter HotspotShield Network Adapter:

   Media State . . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . :

Ethernet adapter Ethernet 2:

   Connection-specific DNS Suffix  . :
   Link-local IPv6 Address . . . . . : fe80::7a61:c3de:bc3:6e0f%49
   IPv4 Address. . . . . . . . . . . : 192.168.56.1
   Subnet Mask . . . . . . . . . . . : 255.255.255.0
   Default Gateway . . . . . . . . . :

Wireless LAN adapter Local Area Connection* 1:

   Media State . . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . :

Wireless LAN adapter Local Area Connection* 2:

   Media State . . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . :

Ethernet adapter Ethernet:

   Connection-specific DNS Suffix  . : hgu_lan
   IPv4 Address. . . . . . . . . . . : 192.168.1.70
   Subnet Mask . . . . . . . . . . . : 255.255.255.0
   Default Gateway . . . . . . . . . : 192.168.1.1

Wireless LAN adapter Wi-Fi:

   Media State . . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . : hgu_lan
```

:

Command Prompt

```
C:\Users\user>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64
Reply from 192.168.1.1: bytes=32 time=1ms TTL=64
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64
Reply from 192.168.1.1: bytes=32 time=3ms TTL=64

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 3ms, Average = 2ms

C:\Users\user>_
```

Command Prompt - ping 192

```
C:\Users\user>ping 192.168.1.1 -t

Pinging 192.168.1.1 with 32 bytes of data:
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64
Reply from 192.168.1.1: bytes=32 time=3ms TTL=64
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64
Reply from 192.168.1.1: bytes=32 time=3ms TTL=64
Reply from 192.168.1.1: bytes=32 time=3ms TTL=64
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64
Reply from 192.168.1.1: bytes=32 time=1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time=1ms TTL=64
Reply from 192.168.1.1: bytes=32 time=3ms TTL=64
Reply from 192.168.1.1: bytes=32 time=2ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time=1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
```

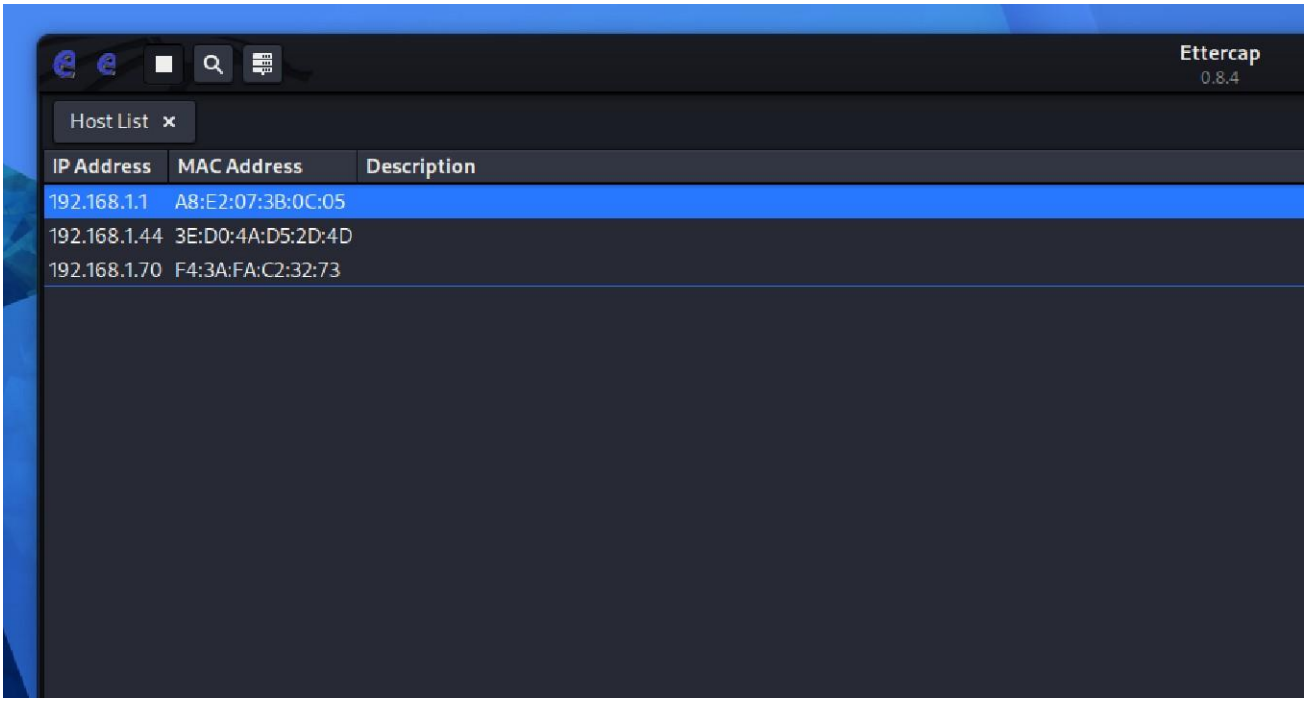
Ettercap
0.8.4
Host List
IP Address
MAC Address
Description
192.168.1.1
A8:E2:07:3B:0C:05
192.168.1.44
3E:D0:4A:D5:2D:4D
192.168.1.70
F4:3A:FA:C2:32:73

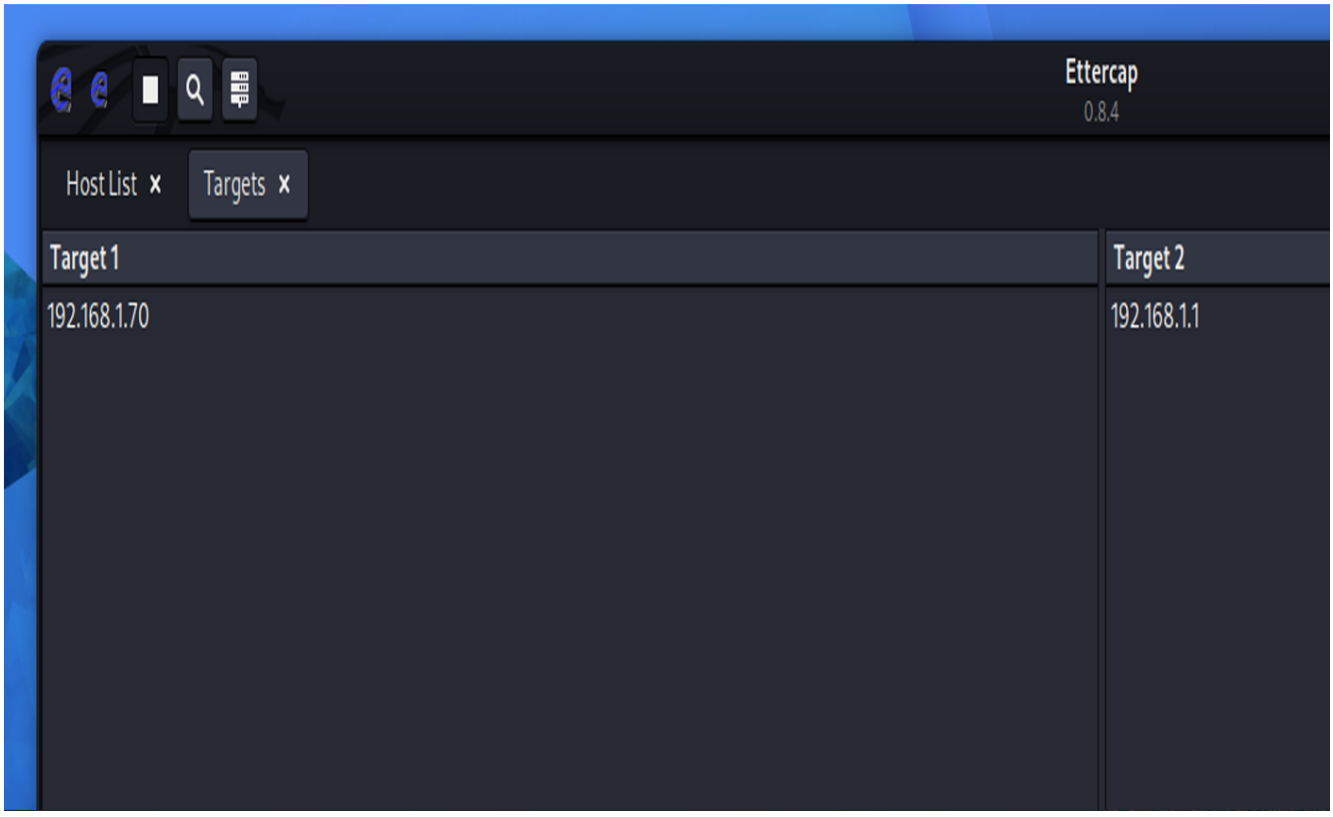
Ettercap
0.8.4
Host List
Targets
Target 1
Target 2
192.168.1.70
192.168.1.1

Capturing from eth0

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

icmp && (eth.src == 08:00:27:fc:55:66 || eth.dst == 08:00:27:fc:55:66)

No.	Time	Source	Destination	Protocol	Length	Info
3795	1117.1448126…	192.168.1.1	192.168.1.70	ICMP	42	Echo (ping) request id=0x7ee7, seq=32487/59262, ttl=64 (no response found!)
3796	1117.1450821…	192.168.1.70	192.168.1.1	ICMP	42	Echo (ping) request id=0x7ee7, seq=32487/59262, ttl=64 (no response found!)
3800	1117.3521413…	192.168.1.70	192.168.1.1	ICMP	74	Echo (ping) request id=0x0001, seq=216/55296, ttl=128 (no response found!)
3801	1117.3536866…	192.168.1.70	192.168.1.1	ICMP	74	Echo (ping) request id=0x0001, seq=216/55296, ttl=128 (reply in 3802)
3802	1117.3557046…	192.168.1.1	192.168.1.70	ICMP	74	Echo (ping) reply id=0x0001, seq=216/55296, ttl=64 (request in 3801)
3805	1117.3570140…	192.168.1.1	192.168.1.70	ICMP	74	Echo (ping) reply id=0x0001, seq=216/55296, ttl=64
3810	1118.3544844…	192.168.1.70	192.168.1.1	ICMP	74	Echo (ping) request id=0x0001, seq=217/55552, ttl=128 (no response found!)
3811	1118.3547322…	192.168.1.70	192.168.1.1	ICMP	74	Echo (ping) request id=0x0001, seq=217/55552, ttl=128 (reply in 3812)
3812	1118.3574432…	192.168.1.1	192.168.1.70	ICMP	74	Echo (ping) reply id=0x0001, seq=217/55552, ttl=64 (request in 3811)
3813	1118.3576826…	192.168.1.1	192.168.1.70	ICMP	74	Echo (ping) reply id=0x0001, seq=217/55552, ttl=64
3834	1119.3574193…	192.168.1.70	192.168.1.1	ICMP	74	Echo (ping) request id=0x0001, seq=218/55808, ttl=128 (no response found!)
3835	1119.3577337…	192.168.1.70	192.168.1.1	ICMP	74	Echo (ping) request id=0x0001, seq=218/55808, ttl=128 (reply in 3836)
3836	1119.3595944…	192.168.1.1	192.168.1.70	ICMP	74	Echo (ping) reply id=0x0001, seq=218/55808, ttl=64 (request in 3835)
3837	1119.3606705…	192.168.1.1	192.168.1.70	ICMP	74	Echo (ping) reply id=0x0001, seq=218/55808, ttl=64
3843	1120.3608581…	192.168.1.70	192.168.1.1	ICMP	74	Echo (ping) request id=0x0001, seq=219/56064, ttl=128 (no response found!)
3844	1120.3616872…	192.168.1.70	192.168.1.1	ICMP	74	Echo (ping) request id=0x0001, seq=219/56064, ttl=128 (reply in 3845)
3845	1120.3644078…	192.168.1.1	192.168.1.70	ICMP	74	Echo (ping) reply id=0x0001, seq=219/56064, ttl=64 (request in 3844)

```
▸ Frame 3796: Packet, 42 bytes on wire (336 bits), 42 bytes captured (336 bits) on interface
▸ Ethernet II, Src: PCSSystemtec_fc:55:66 (08:00:27:fc:55:66), Dst: GOIPGlobalSe_3b:0c:05 (a
▸ Internet Protocol Version 4, Src: 192.168.1.70, Dst: 192.168.1.1
▸ Internet Control Message Protocol

0000  a8 e2 07 3b 0c 05 08 00  27 fc 55 66 08 00 45 00   ···;···· '·Uf··E·
0010  00 1c 7e e7 00 00 40 01  78 62 c0 a8 01 46 c0 a8   ··~···@· xb···F··
0020  01 01 08 00 fa 30 7e e7  7e e7                     ····0~·· ~·
```

Capturing from Ethernet

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Capturing from Ethernet

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter … <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Host	Info
42	6.118195	Intel_da:05:01	Broadcast	ARP	60		Who has 10.62.82.193? Tell 10.62.82.1
43	6.782180	192.168.1.70	239.255.255.250	SSDP	212	239.255.255.250:1900	M-SEARCH * HTTP/1.1
44	7.029104	GOIPGlobalSe_3b:0c:…	Broadcast	0xfffa	60		Ethernet II
45	7.065964	192.168.1.70	192.168.1.1	ICMP	74		Echo (ping) request id=0x0001, seq=319/16129, ttl=128 (reply in 46)
46	7.069030	192.168.1.1	192.168.1.70	ICMP	74		Echo (ping) reply id=0x0001, seq=319/16129, ttl=64 (request in 45)
47	7.116747	Intel_da:05:01	Broadcast	ARP	60		Who has 10.62.82.193? Tell 10.62.82.1
48	7.385344	PCSSystemtec_fc:55:…	GOIPGlobalSe_3b:0c:…	ARP	60		192.168.1.70 is at 08:00:27:fc:55:66
49	7.782871	192.168.1.70	239.255.255.250	SSDP	212	239.255.255.250:1900	M-SEARCH * HTTP/1.1
50	8.029098	GOIPGlobalSe_3b:0c:…	Broadcast	0xfffa	60		Ethernet II
51	8.111619	192.168.1.70	192.168.1.1	ICMP	74		Echo (ping) request id=0x0001, seq=320/16385, ttl=128 (reply in 52)
52	8.114305	192.168.1.1	192.168.1.70	ICMP	74		Echo (ping) reply id=0x0001, seq=320/16385, ttl=64 (request in 51)
53	8.116721	Intel_da:05:01	Broadcast	ARP	60		Who has 10.62.82.193? Tell 10.62.82.1
54	8.284785	GOIPGlobalSe_3b:0c:…	Broadcast	ARP	60		Who has 192.168.1.63? Tell 192.168.1.1
55	8.642366	GOIPGlobalSe_3b:0c:…	Broadcast	ARP	60		Who has 192.168.1.63? Tell 192.168.1.1
56	9.029122	GOIPGlobalSe_3b:0c:…	Broadcast	0xfffa	60		Ethernet II
57	9.034408	GOIPGlobalSe_3b:0c:…	Broadcast	ARP	60		Who has 192.168.1.63? Tell 192.168.1.1
58	9.087393	192.168.1.70	192.168.1.1	ICMP	74		Echo (ping) request id=0x0001, seq=321/16641, ttl=128 (reply in 59)
59	9.089902	192.168.1.1	192.168.1.70	ICMP	74		Echo (ping) reply id=0x0001, seq=321/16641, ttl=64 (request in 58)
60	9.117446	Intel_da:05:01	Broadcast	ARP	60		Who has 10.62.82.193? Tell 10.62.82.1

```
▸ Frame 53: Packet, 60 bytes on wire (480 bits), 60 bytes captured (480 bits) on interface \Device\NPF_{5D87AD91-1115-41C2-8393-
▸ Ethernet II, Src: Intel_da:05:01 (90:e2:ba:da:05:01), Dst: Broadcast (ff:ff:ff:ff:ff:ff)
▾ Address Resolution Protocol (request)
    Hardware type: Ethernet (1)
    Protocol type: IPv4 (0x0800)
    Hardware size: 6
    Protocol size: 4
    Opcode: request (1)
    Sender MAC address: Intel_da:05:01 (90:e2:ba:da:05:01)
    Sender IP address: 10.62.82.1
    Target MAC address: 00:00:00_00:00:00 (00:00:00:00:00:00)
    Target IP address: 10.62.82.193

0000  ff ff ff ff ff ff 90 e2  ba da 05 01 08 06 00 01
0010  08 00 06 04 00 01 90 e2  ba da 05 01 0a 3e 52 01
0020  00 00 00 00 00 00 0a 3e  52 c1 00 00 00 00 00 00
0030  00 00 00 00 00 00 00 00  00 00 00 00
```