


KANEFUSA

Plastic Cutting



Kanefusa - A New Dimension of Performance

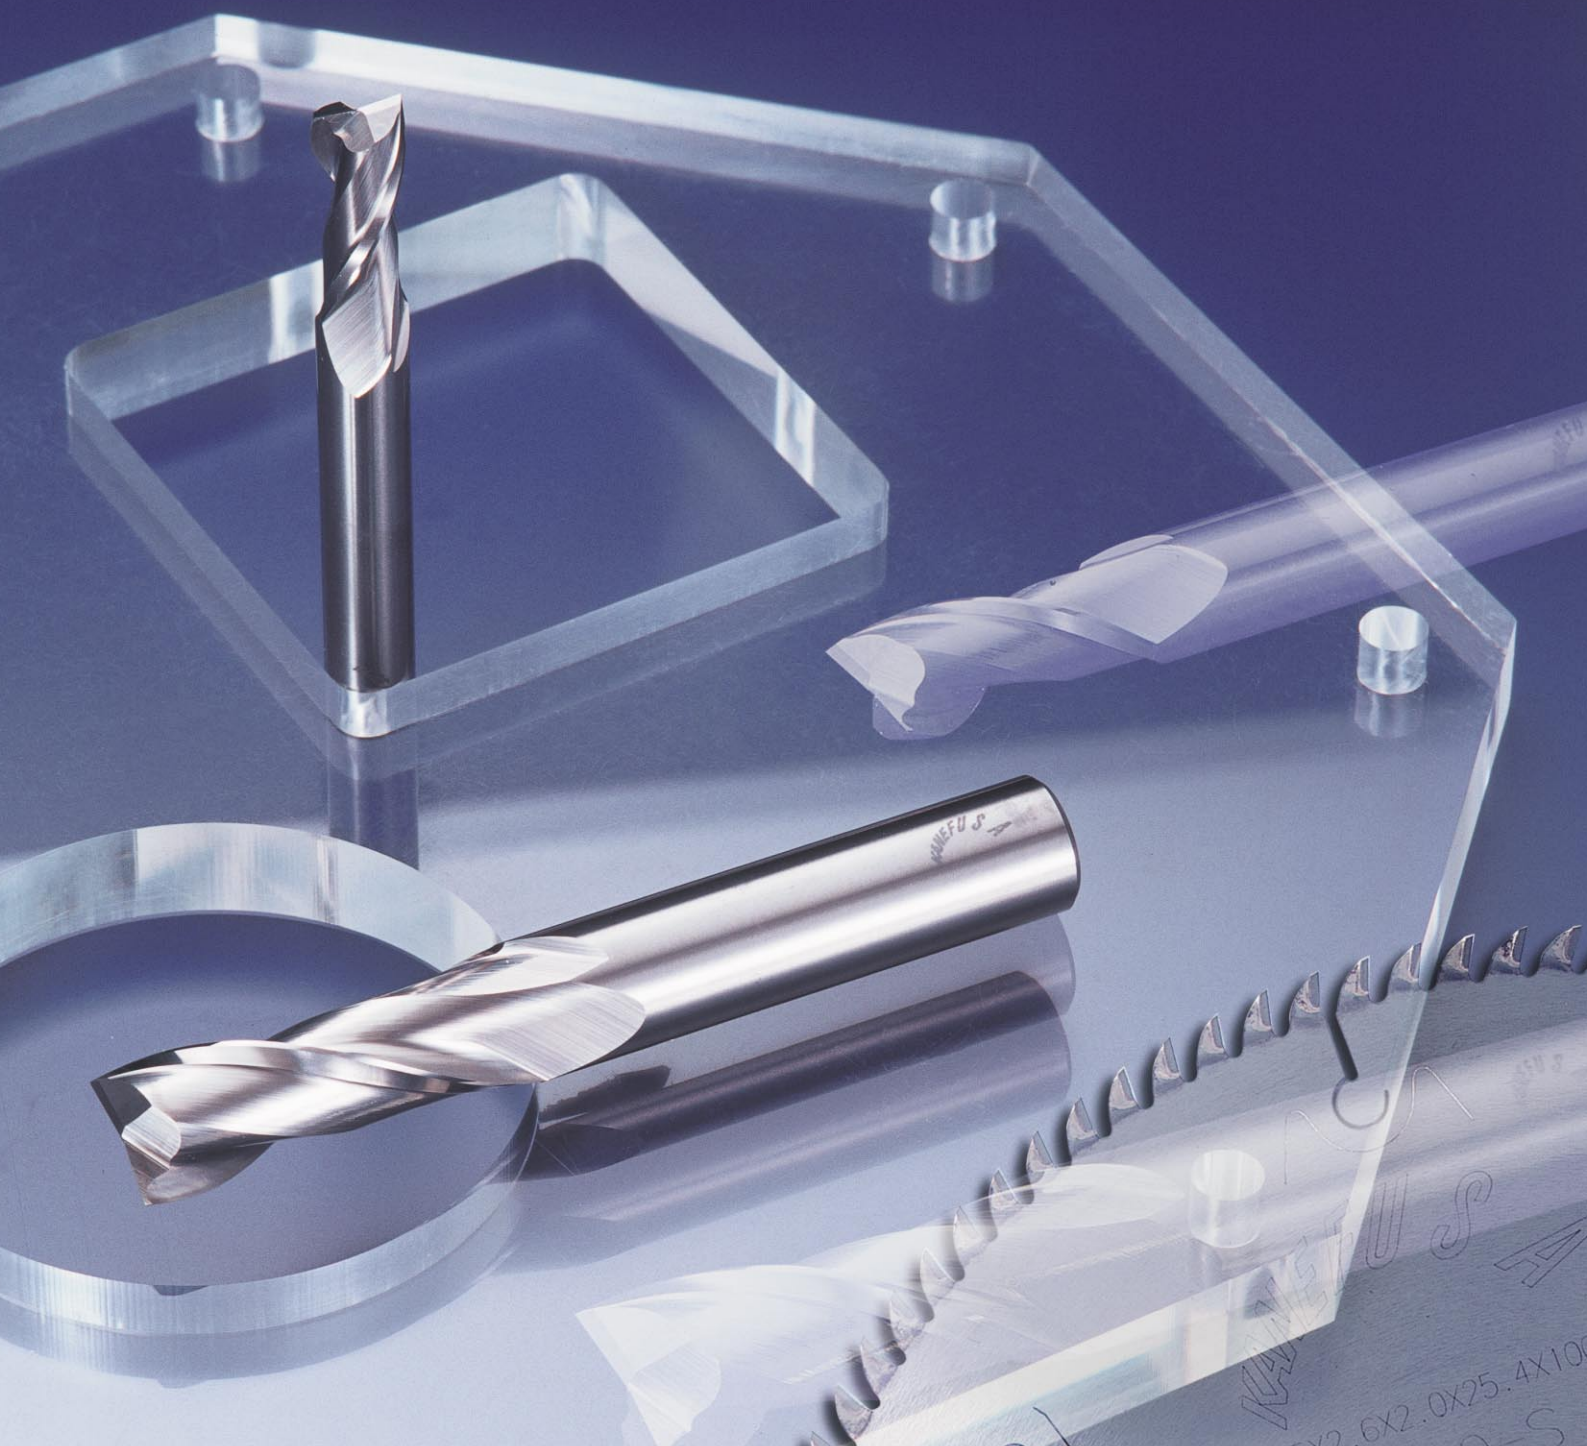

JQA-QM3710




JQA-EM3137
Head office
Factory

Specifications and appearance are subject to change without notice.
Photographs and illustrations may vary from actual products.

O-54-2
[Class] [Article] [Revision]

Plastic Cutting

Saw Blade For Plastic Plate Cutting

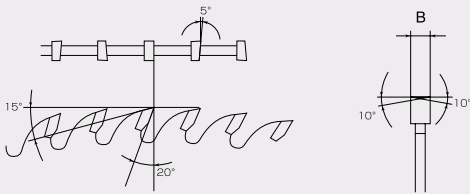

For Plastic Plate Cutting

PN type T.C.T Saw Blade

PN type is suitable to cut thin plastic (vinyl or acryl). Thanks to a extremely sharp edge, PN type enables a nearly knife mark free cut finish with transparency.

[APPLICATION] Sizing thin plastic plate, Sheets, shapes



[MATERIAL] Plastics, acrylic resin

[MACHINES] Beam saw, table saw

[EDGE MATERIAL] HW

Order no.	D mm	B mm	Size b mm	d mm	z mm	Type
1 744-1009-462	205	1.2	0.8	25.4	100	PN
2 744-1017-462	255	2.0	1.5	25.4	100	PN
3 744-1025-462	255	2.6	2.0	25.4	90	PN
4 744-1041-462	305	3.0	2.2	25.4	100	PN
5 744-1059-462	305	1.6	1.2	25.4	120	PN
6 744-1067-462	305	2.0	1.5	25.4	120	PN

※Other specifications are available upon request.

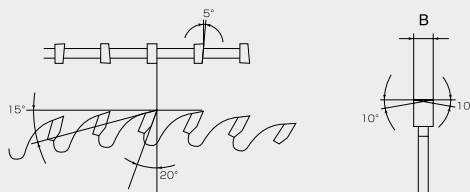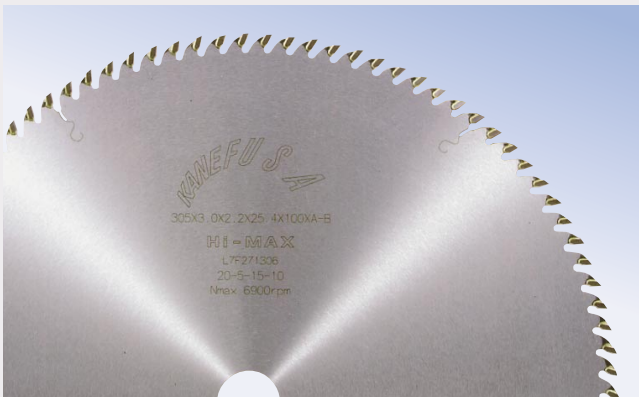

For Plastic Plate Cutting

AB type T.C.T Saw Blade

General Purpose Saw Blade.

Cuts tear-out free in thin walled plastics and other difficult to cut materials like foamboard.

[APPLICATION] Sizing thick plastic plate, Sheets, shapes

[MATERIAL] Plastics, acrylic resin

[MACHINES] Beam saw, table saw



[EDGE MATERIAL] HW

Order no.	D mm	B mm	Size b mm	d mm	z mm	Type
1 655-0041-401	255	2.0	1.5	25.4	90	AB
2 655-0067-401	255	2.6	2.0	25.4	90	AB
3 655-5190-401	305	3.0	2.2	25.4	100	AB

※Other specifications are available upon request.



Router Bit For Acrylic plate Routing

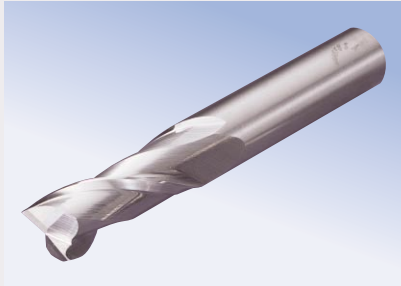

For Mirror Finish Acrylic Plate Cutting

Acryl-Bit (Type1)

Fine grade Tungsten Carbide with mirror-finished cutting edge enables clear cuts in PMMA. Because edge polishing can be reduced or even eliminated, tremendous cost saving is possible.

[APPLICATION] Routing

[MATERIAL] Plastics

[MACHINES] CNC router machine

[EDGE MATERIAL] HW

Order no.	d mm	D mm	Size L mm	CL mm	z mm	Type	Rotation
1 827-0019-900	6	6	70	15	2	Spiral	R / Pos.
2 827-0035-900	10	10	80	30	2	Spiral	R / Pos.
3 827-0043-900	12	12	85	35	2	Spiral	R / Pos.

Cutting Sample



● Highly permeable cutting surface with low Whitening and Adhesion.



Acryl-Bit (Type1)

Bit for Metalworking

Straight Bit for Woodworking

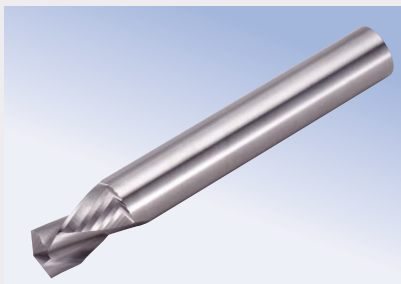

For Mirror Finish Acrylic Plate Cutting with Cover Seat

Acryl-Bit (Type3)

With a high precision ground edge with positive and negative shear angles, Acryl-Bit (Type3) cuts clean on plastic and acrylic material with protective sheet. The Bit cuts clean in routing for less subsequent process.

[APPLICATION] Routing

[MATERIAL] Plastics with cover seat


[MACHINES] CNC router machine

[EDGE MATERIAL] HW

Order no.	d mm	D mm	Size L mm	CL mm	z mm	Type	Rotation
1 827-3005-900	3	2	60	6	1+1	Pos.+Neg.	R / Pos.+Neg.
2 827-3013-900	4	4	60	10	1+1	Pos.+Neg.	R / Pos.+Neg.
3 827-3021-900	6	6	70	15	1+1	Pos.+Neg.	R / Pos.+Neg.
4 827-3039-900	10	10	80	20	1+1	Pos.+Neg.	R / Pos.+Neg.
5 827-3047-900	12	12	85	30	1+1	Pos.+Neg.	R / Pos.+Neg.




Conventional bit




Acryl-Bit (Type3)

Cutting Parameter
RPM:
5000~18000rpm
Feeding rate:
0.5~3m/min



• Negative shear angle for clean edge on the top side



• Positive shear angle for clean edge on the bottom side



For Long Life Acrylic Plate Cutting

PCD Acryl-Bit

PCD edge gives very long cutting life. The tool prevents adhesion and curling of material for long cutting life.

[APPLICATION] Routing

[MATERIAL] Plastics

[MACHINES] CNC router machine

[EDGE MATERIAL] DP

Application Chart

	Acryl-Bit Type1	Acryl-Bit Type3	Acryl-Bit PCD
Transparency	◎	○	×
Protection sheeted material	×	◎	◎
Cutting life	○	○	◎

KANEFUSA CORPORATION

Head Office / Factory

1-1, Nakaoguchi, Ohguchi-cho, Niwa-Gun,
Aichi-ken, Japan, Postal Code 480-0192
Tel : +81 587 95 7221 Fax : +81 587 95 7226
E-mail:sales-ex@kanefusa.co.jp

PT. KANEFUSA INDONESIA

EJIP Industrial Park, Plot 8D, Cikarang Selatan,
Bekasi 17550, West Java, Indonesia
Tel : +62 21 897 0360 Fax: +62 21 897 0286
+62 21 897 0287

E-mail : sales@kanefusa.co.id

Surabaya Service Center

JL. Berbek Industri VII/5B Kawasan Industri Sier Surabaya, Indonesia
Tel : +62 31 849 1784 Fax: +62 31 849 2784

KANEFUSA EUROPE B.V.

De Witbogt 12, 5652 AG, Eindhoven, The Netherlands
Tel : +31 40 2900 901 Fax: +31 40 2900 908
E-mail : info@kanefusa.nl

Moscow Office

Vozdvizhenka 10, 125009, Moscow, Russia
Tel : +7 495 797 3759

KANEFUSA USA, INC.

621 Dolwick Drive Erlanger, KY 41018, USA
Tel : +1 859 283 1450 Fax: +1 859 283 5256
E-mail : sales@kanefusa-na.com

Atlanta Office

3675 Crestwood Pkwy, Ste 400, Duluth, GA 30096, U.S.A
Tel : +1 770 817 7593

KANEFUSA CHINA CORPORATION

NO.50 Zhuzhu Road, Lujia Town Kunshan city, Jiangsu, China
Tel : +86 512 57875072 Fax: +86 512 57875073
E-mail : yy@kanefusa-cn.com

Tianjin Office

Sanjinglu No.5 Dongli economic development zone Tianjin city China
Tel : +86 22 5823 7633 Fax: +86 22 5823 7632
E-mail : tjkc03@kanefusa-cn.com

Guangdong Office

№2 Danhen Road, Danzao Town Foshan City, Guangdong, China
Tel : +86(0)75785406562 Fax: +86(0)75785406571
E-mail : fssales@kanefusa-cn.com

KANEFUSA INDIA PRIVATE LIMITED

Plot No.169, Sector-8, IMT Manesar, Gurgaon,
Haryana PIN 122-050 India
Tel : +91 124 420 8440 Fax: +91 124 420 8441
E-mail : info@kanefusa.co.in

Pune Office

Meera Plaza, Opposite Hindustan Unilever, Survey No.145-188, near
Ganeshnagar Industrial Area, Pune-Saswad Road, Phursungi, Pune 412308
Tel : +91 20 65600289

KANEFUSA DO BRASIL LTDA.

Rua Bom Pastor, 2732 Bloco Torre Sul - Sala 73
São Paulo - SP Cep:04203-003
Tel : +55 11 2372 7664 Fax: +55 11 2372 7663
E-mail : vendas@kanefusa.net.br

Joinville Service Center

Rua Helmuth Fallgatter 1937, Boa Vista, Joinville, SC, 89206-101, Brasil
Tel : +55-11-9-8680-8497


KANEFUSA MEXICO S.A. DE C.V.

Circuito Logistic Aeropuerto No.4 Fracc.1 Lote2 Predio San
Antonio Texas Silao Guanajuato C.P. 36273 Mexico
Tel : +52 1 472 7486314/3 Fax: +52 1 472 7486313
E-mail : info@kanefusa.com.mx

KANEFUSA VIETNAM CO., LTD.

Road No.N3-2, Long Duc IP, Long Duc Ward,
Long Thanh District, Dong Nai Province, Vietnam
Tel : +84 61 368 1400 Fax: +84 61 368 1402
E-mail : sales@kanefusa-vn.com

Paper Cutting Knife

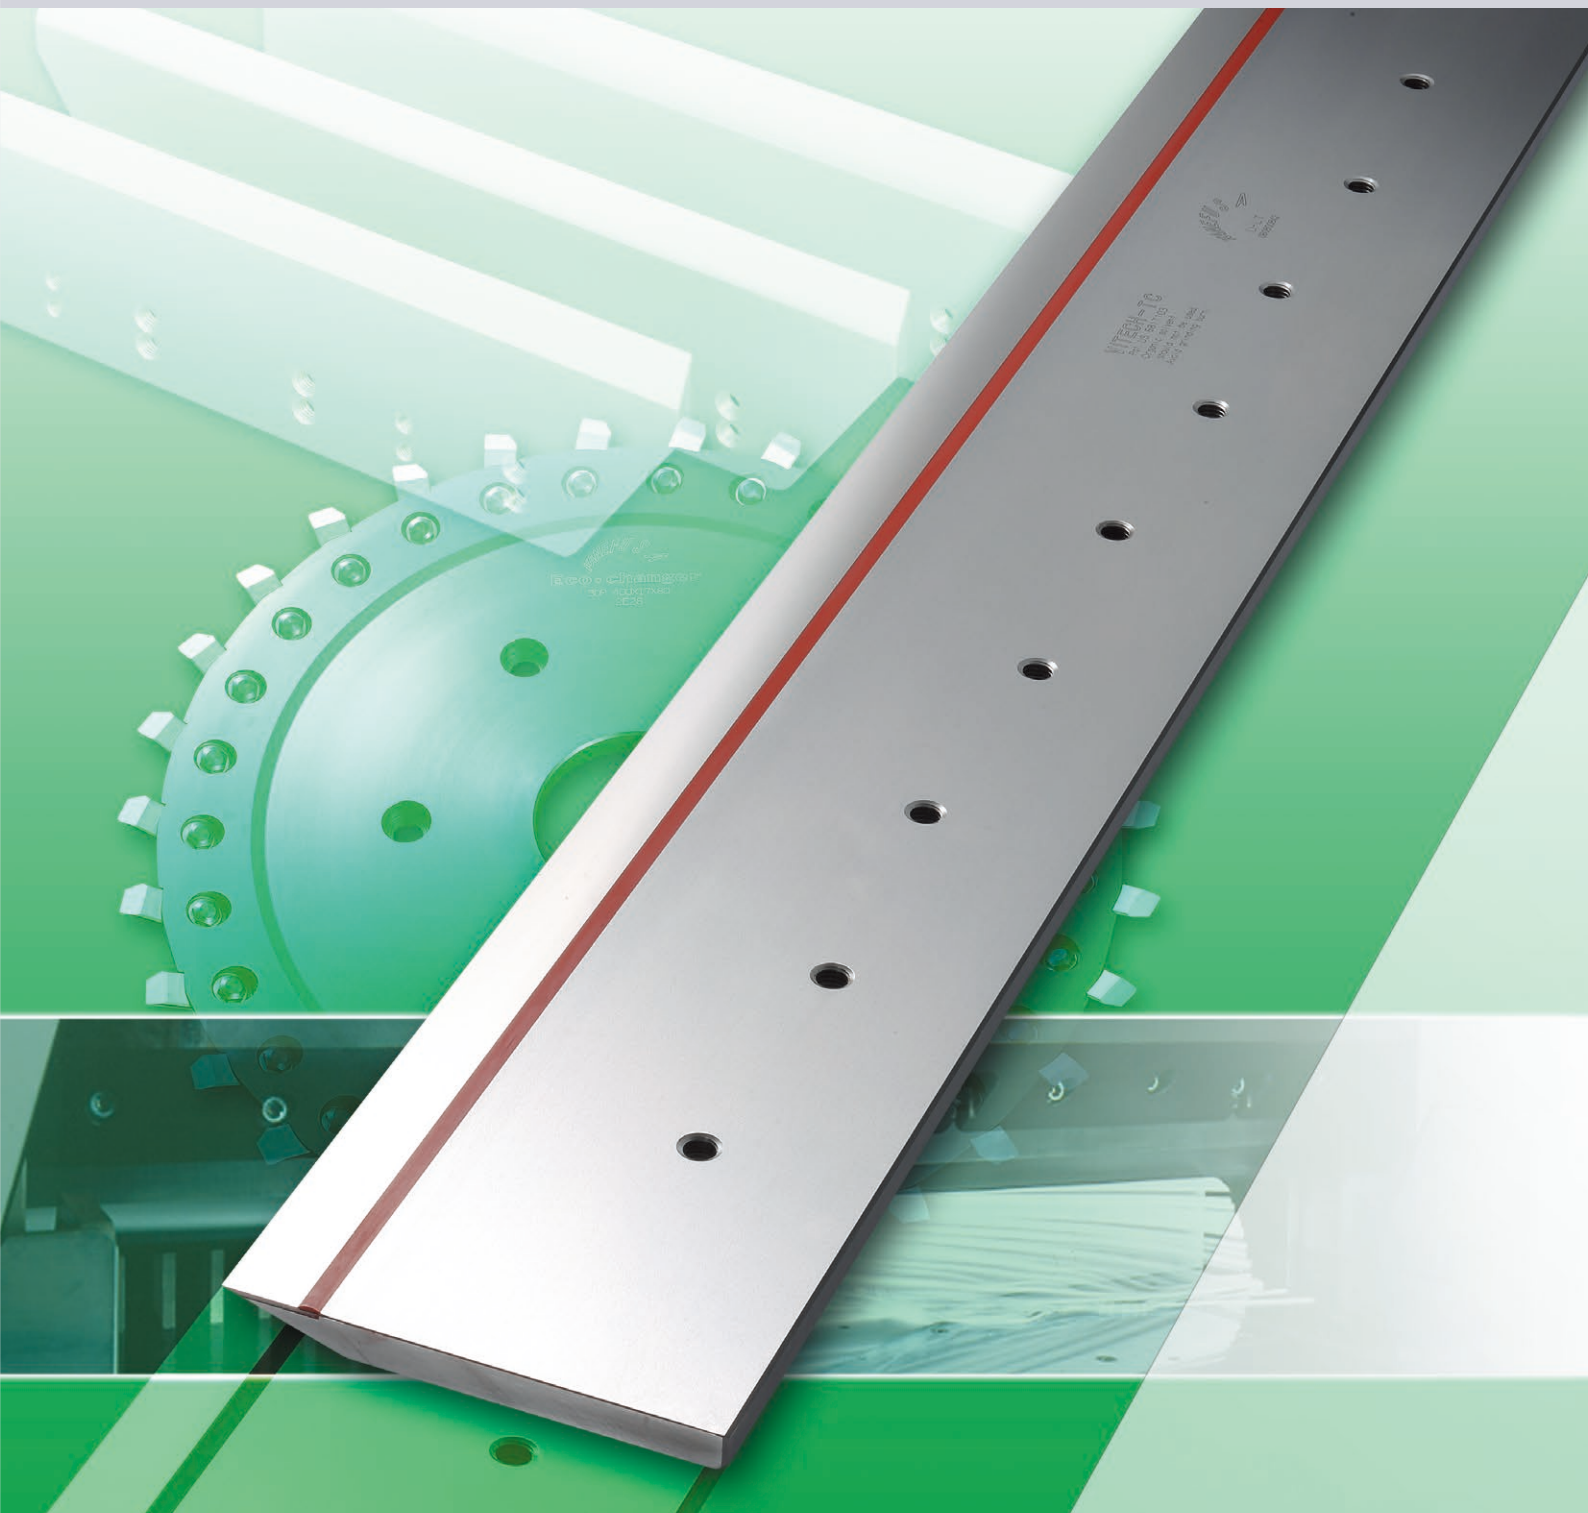

Paper Guillotine Knife

Made of ultra-fine-grained carbide

VITECH® TC

Abrasion resistance

Features

◆ Suppresses streaking.


The ultra-fine-grained cemented carbide with high hardness and toughness minimizes chipping, a cause of streaking. This enables continuous high-quality cutting.

◆ Provides excellent machining quality that lasts.

The new manufacturing method minimizes the occurrence of distortion even after repeated repolishing. Consistently beautiful, high-quality machining quality is achieved.

◆ Long product life reduces cost.


The ultra-fine-grained cemented carbide with superior abrasion resistance helps achieve product life some 1.5 times longer than our conventional ultra-fine-grained carbide products.

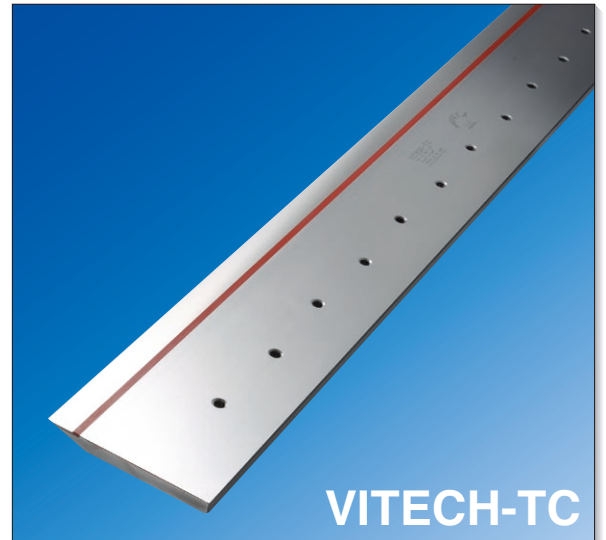


VITECH-TC

Distortion after last use

VITECH TC Amount of distortion = 0.23mm Unit:mm




Conventional product Amount of distortion = 4.65mm Unit:mm



* In-house test results

* L = 1390, no distortion correction

Monitor test results

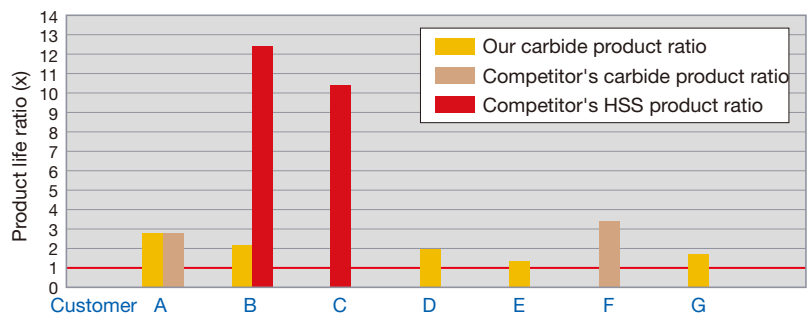

Customer	Cutting material	Product life reference
A	Recycled paper	Undercutting, cutting noise
B	Art paper / Coated paper	Undercutting, cutting quality
C	Art paper / Coated paper	Streaking due to chipping
D	Art paper / Coated paper	Streaking due to chipping
E	Art paper / Coated paper, Special paper	Undercutting, cutting noise
F	Various paper quality	Streaking due to undercutting and chipping
G	Various paper quality	Undercutting, cutting noise

Notes on using VITECH (1) Be careful of grinding heat generated during repolishing (2) Distortion correction and remodeling prohibited (3) Use of thinner, etc. prohibited (4) Use for non-paper work prohibited (5) Blade cleaning using scrapers prohibited

* For details, please contact our sales representative.

Made of ultra-fine-grained carbide

VITECH® TCK

Nick resistance

Features

- With a higher nick resistant Tungsten Carbide, "VITECH-TCK" reduces edge chipping and insures a long time quality cutting. Edge observation after sharpening confirmed less edge chipping.
- Distortion after re-grinding can be minimized due to our special bonding technology.
- The color of the strip in the knife helps recognize the TC quality.



VITECH-TCK


Paper Guillotine Knife

■ Made of ultra-fine-grained carbide

SPAT EXTRA II

Features

This ultra-fine-grained carbide paper guillotine knife is capable of handling all kinds of paper, from general paper to difficult-to-cut paper for which traditional carbide paper guillotine knives have been considered unsuitable.

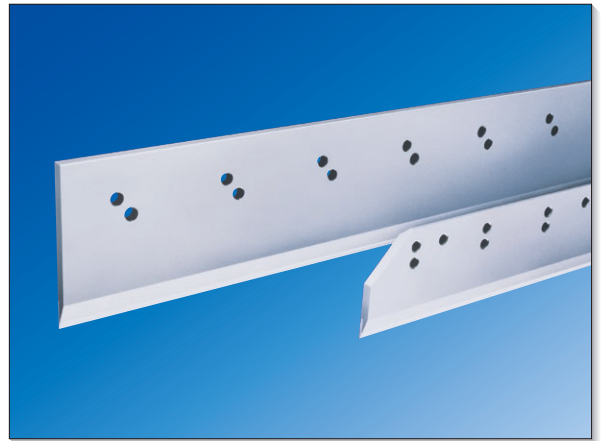

■ Special high-speed steel

Splendor Plus

Features

◆ Improved product life.

It adopts special high-speed steel with high hardness and toughness for the cutting edge, achieving a longer product life about 1.5 times that of our conventional products.

◆ Ensures grinding performance in re-polishing.

Grinding performance issues in repolishing have been eliminated by using a three-layer structure of inlays with different properties.

◆ Chipping is minimal, high-precision machining can be maintained for a long time.

It exhibits excellent sharpness particularly when cutting art papers and coated papers, and since it does not easily get chipped, high-precision cutting can be maintained.



■ High-speed steel

Paper Guillotine Knife

Features

The high-quality high-speed steel provides stable machining quality that lasts.



■ High-speed steel

Skim Coating Special coating

A surface-treated product with highly nonadherence properties, suppressing the adhesion of glue

Features

- Since glue does not easily adhere to the knife, the quality of the cutting surface is improved.
- Reduces the dangerous work of removing glue attached to the knife.
- Reduces the amount of silicone spray used, leading to improved work environments.



Three Trimmer Knife

■ Made of ultra-fine-grained carbide

VITECH® TC

Features

✦ Enables high-quality bookbinding finishing.

Along with the newly developed manufacturing method, the ultra-fine-grained cemented carbide with high hardness and toughness minimizes the occurrence of streaking.

✦ Improves machine operation rate and productivity.

The ultra-fine-grained cemented carbide with superior abrasion resistance helps achieve product life approximately 1.5 times longer than our conventional products.



VITECH-TC


■ Chipping of the cutting edge

The tough ultra-fine-grained cemented carbide suppresses streaking even under conditions where, conventionally, chipping easily occurs.

* Conditions: After cutting 20 sheets of yellow cardboard #36 t3.0


* In-house test results

Compared to conventional products

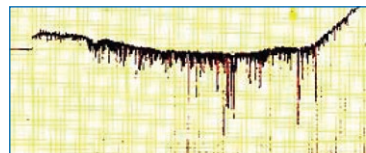

Max 50µm

VITECH-TC

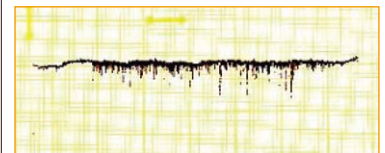

Max 14µm

⚠ **Notes on using VITECH** (1) Be careful of grinding heat generated during repolishing (2) Distortion correction and remodeling prohibited (3) Use of thinner, etc. prohibited (4) Use for non-paper work prohibited


* For details, please contact our sales representative.

■ High-speed steel / Carbide

Three Trimmer Knife

Features

Exhibits excellent durability in the perfect binding process (high-grade binding, paperback binding, thick magazines, etc.).

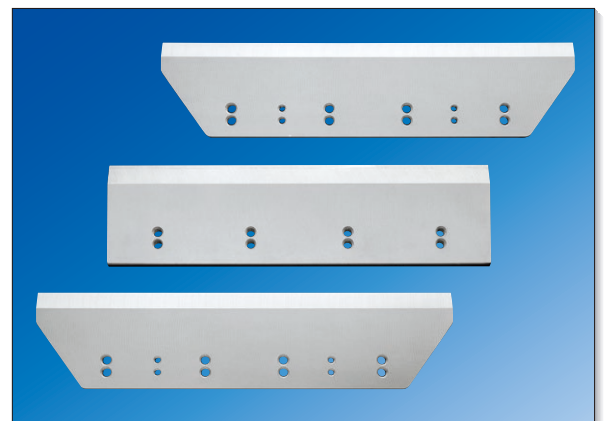

■ High-speed steel / Carbide

Skim Coating Special coating

A surface-treated product with highly nonadherence properties, suppressing the adhesion of glue

Features

- Since glue does not easily adhere to the knife, the quality of the cutting surface is improved.
- Reduces the dangerous work of removing glue attached to the knife.
- Helps shorten down time and improves productivity.
- Reduces the amount of silicone spray used, leading to improved work environments.



Three Trimmer Knife

■ High-speed steel / Carbide

Three Trimmer Knife for Bookbinding machine

Features

Exhibits excellent durability in the saddle stitching process (magazines, leaflets, etc.).



Bookbinding Knife

■ Carbide

Replaceable blade type binder cutter

Bookbinding Cutter

Features

Custom made tooling allows the designing of the cutters according to your application. Accomplishes longer tool life.



■ Carbide

Circular Binding Sawblade

Features

T.C.T circular sawblade used for perfect binding. It has a long service life and provides excellent machining quality.




Table Paper Trimmer

■ High-speed steel / Carbide

Tabletop Paper Guillotine Knife

Features

Products can be manufactured with various dimensions. Very straight knives, with razor sharp cutting edges, provides clean cuts.

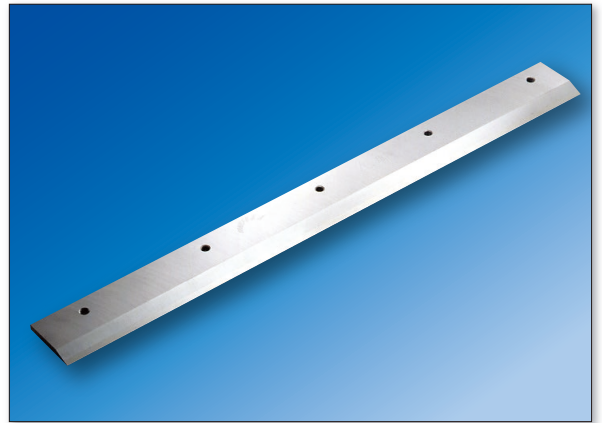


■ Special High-speed steel / High-speed steel / Carbide

Sheeter Knife

Features

We select the optimum material according to the usage and manufacture highly durable knives. Mirror surface finishes on bevels and high quality cutting edge materials enable excellent cut quality and provides longer life.

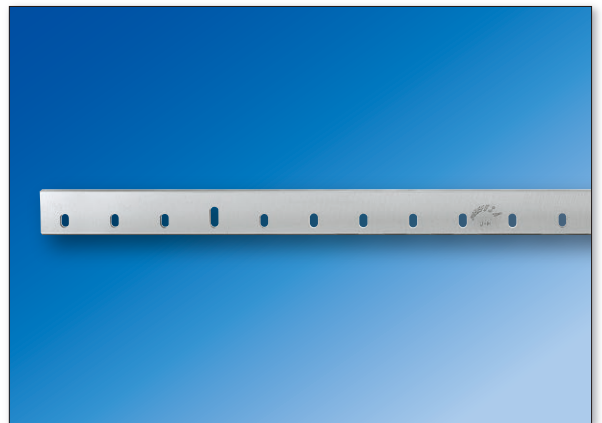

Slitter Knife

Slitting process in paper making.

■ High-speed steel / Carbide


Slitter Knife

Features

Products can be manufactured with various dimensions.
· All of our slitters are precision manufactured to extremely close tolerances to produce razor sharp edges.

Corresponding equipment

Winder, planographic processing machine

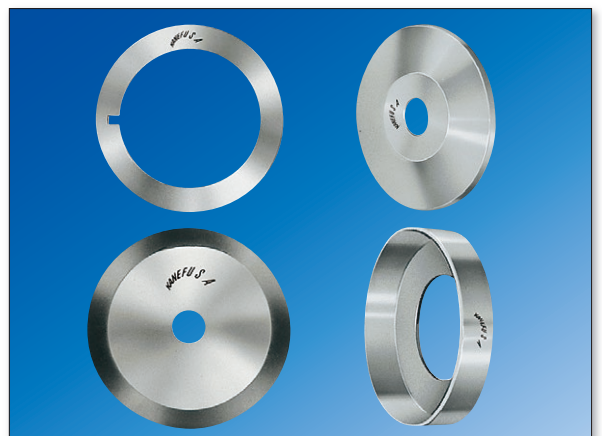

Slitter Knife


Slitting process on film, paper, metal foil, tak paper.

■ High Speed Steel

Gabel type slitter knife

Features

- Less paper dust.
- Less tear, fuzz and adhesive sheet overflow results in more stable processing.
- Less everted-edge and flare, improving the straightness of slitting and achieving ideal slitting processes.


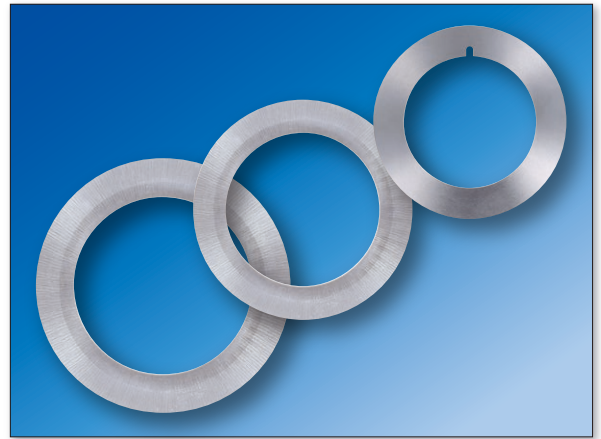


■ Cutting quality

	Competitor	KANEFUSA
(X500) cut surface of a sheet of paper application= basis weight 65-175g/m ² stuck cut		
(x1000) cut surface of film sheet application= 50μm thick PET resin film		
(x10) cut surface of adhesive tape application= rolled side		


■ Everted-edge amount

Comparison of everted-edge amount at the same cutting amount.
application 50μm thick PET resin film

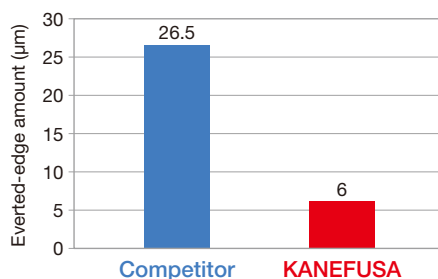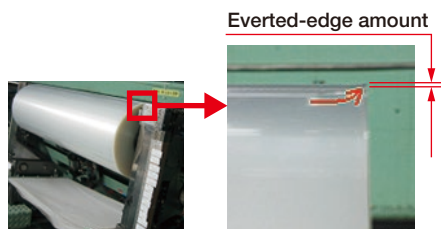

■ Straightness of slitting

Measurement of cut material width is every 1cm (total: 6 points).
application= adhesive paper, thickness at 30μm

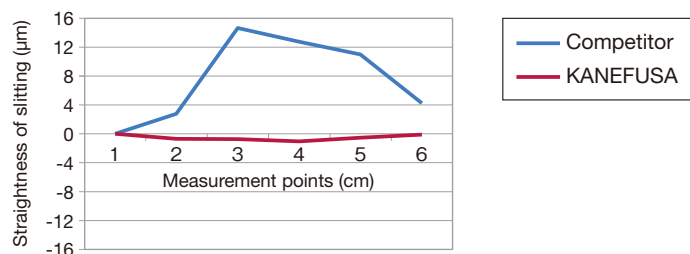

■ Test results

Customer	Application	Size			Blade life	Results
		OD	ID	T		
A	tak paper	98	66	0.7	2.8 times	Decreased generation of paper dust. Less adhesive sheet overflow and glue adhesion on knife edge. Favorable cutting quality.
B	PET resin film	168	115	1.5	1.5 times	Good cutting quality, with less paper dust and less tearing.
C	Waterproof sheet	98	66	0.7	1.3 times	Reduced everted-edge.



www.kanefusa.net/en/

E-mail : sales-ex@kanefusa.co.jp



Asia

KANEFUSA CORPORATION

Head Office / Factory

1-1, Nakaoguchi, Ohguchi-cho, Niwa-Gun,
Aichi-ken, Japan, Postal Code 480-0192
Tel : +81 587 95 7221 Fax : +81 587 95 7226
E-mail: sales-ex@kanefusa.co.jp

PT. KANEFUSA INDONESIA

EJIP Industrial Park, Jl. CISOKAN RAYA Plot 8 D,
South Cikarang, Bekasi 17530, West Java, Indonesia
Tel : +62 21 897 0360 Fax : +62 21 897 0286
+62 21 897 0287

E-mail : sales@kanefusa.co.id

Surabaya Service Center

JL. Berbek Industri VII/5B Kawasan Industri Sier Surabaya, Indonesia
Tel : +62 31 849 1784 Fax : +62 31 849 2784

KANEFUSA CHINA CORPORATION

NO.50 Zhuzhu Road, Lujia Town Kunshan city, Jiangsu, China
Tel : +86 512 57875072 Fax : +86 512 57875073
E-mail : yy@kanefusa-cn.com

KANEFUSA INDIA PRIVATE LIMITED

Plot No.169 Sector-8, IMT Manesar, Gurugram,
Haryana PIN 122 051, India
Tel : +91 124 473 4427
E-mail : sales@kanefusa.co.in

KANEFUSA VIETNAM MANUFACTURING CO., LTD.

Plot No. C 11-22-23, Thang Long Vinh Phuc Industrial Park,
Binh Xuyen Commune, Phu Tho Province, Vietnam
Tel : +84 211 3510 992 Fax : +84 211 3510 990

KANEFUSA VIETNAM CO., LTD.

Road No.N3-2, Long Duc Industrial Park, Binh An Commune,
Dong Nai Province, Vietnam
Tel : +84 251 368 1400 Fax : +84 251 368 1402
E-mail : sales@kanefusa-vn.com

Americas

KANEFUSA USA, INC.

621 Dolwick Drive Erlanger, KY 41018, USA
Tel : +1 859 283 1450 Fax : +1 859 283 5256
E-mail : sales@kanefusa-na.com

KANEFUSA DO BRASIL LTDA.

Rua Bom Pastor, 2732 Bloco Torre Sul - Sala 73
São Paulo - SP Cep:04203-003, Brasil
Tel : +55 11 2372 7664 Fax : +55 11 2372 7663
E-mail : vendas@kanefusa.net.br

Joinville Service Center

Rua Helmuth Fallgatter 1937, Joinville-SC CEP: 89206-101, Brasil
Tel : +55-47-3439-5486

KANEFUSA MEXICO S.A. DE C.V.

Circuito Logistic Aeropuerto No.4 Frac.1 Lote2 Predio San
Antonio Texas Silao Guanajuato C.P. 36273 Mexico
Tel : +52 1 472 7486314/3 Fax : +52 1 472 7486313
E-mail : sales@kanefusa.com.mx


Europe

KANEFUSA EUROPE B.V.

De Witbogt 12, 5652 AG, Eindhoven, The Netherlands
Tel : +31 40 2900 901
E-mail : info@kanefusa.nl

KANEFUSA

Cold Sawblade

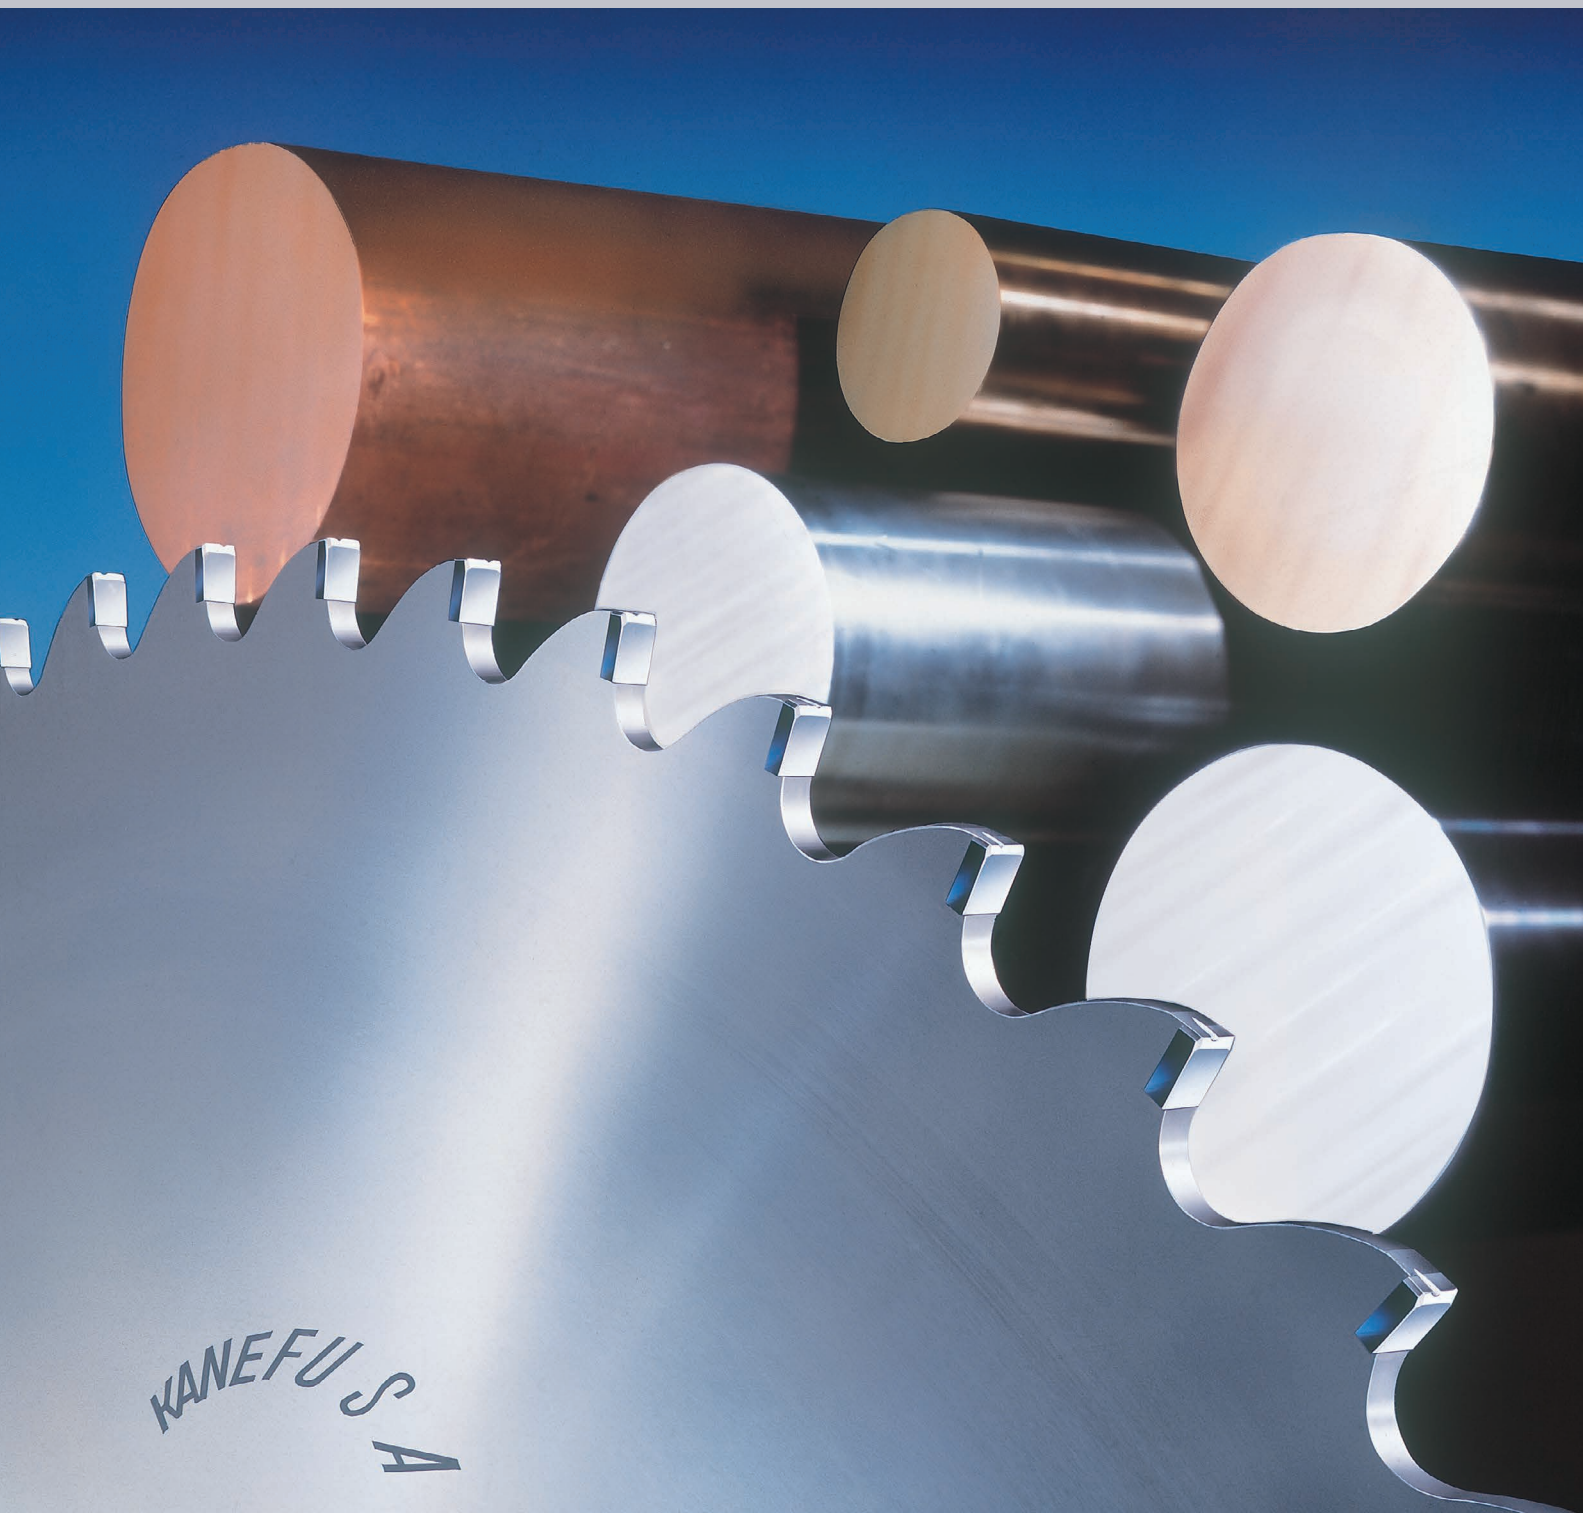

Kanefusa - A New Dimension of Performance



JQA-QM3710



JQA-EM3137
Head Office
Factory

Specifications and appearance are subject to change without notice.
Photographs and illustrations may vary from actual products.

0-55E-5
[Class] [Article] [Revision]


Advantages

1 / Features


- 1 Kanefusa uses only the very best steel for its sawblades. After heat treatment, the saw plate is very flat. Kanefusa's proprietary flattening and surface grinding process ensure that the plate is distortion free and has a uniform thickness. A good plate with high rigidity is essential for straight running of sawblades.
- 2 A special carbide, which is exclusive to Kanefusa, was developed in cooperation with a leading carbide manufacturer.
The carbide was designed for cutting to metals clearly outlast conventional carbide.
- 3 Our special brazing technology leads to a higher braze joint strength and therefore teeth are firmly attached to the plate to prevent carbide breakage.
- 4 High sawing accuracy can be achieved thanks to our high quality products, which is distortion free and uniform thickness of material.
- 5 Due to originally developed coating, our cold sawblades provide the longest lifetime and stable performance for the maximum productivity and the lowest cost per cut.

2 / Field test at user (Tube Max Orbital)

Material: STKR400 or equivalent
203.2~101.6 x t 12.7mm
Sawblade Size: 380 x 3.7 x 66Z
Parameters: V=358 m/min
Fz=0.16 mm/z




Material: STKR400 139.8 x t 4.5mm
Sawblade Size: 355 x 3.1 x 72Z
Parameters: V=600 m/min
Fz=0.14 mm/z




3 / Field test at user (Tube Max Scarf)

Material: SGP80A 89.1 x t 2.8etc.
(Small welding bead)
Sawblade Size: 550 x 3.6 x 132Z
Parameters: V=650 m/min
Fz=0.08 mm/z



Material: SAE1018 38.1 x t 3.2etc.
(Big welding bead)
Sawblade Size: 550 x 3.5 x 120Z
Parameters: V=330 m/min
Fz=0.06 mm/z



4 / Kanefusa Oil Lubricant

For best performance of the sawblades, we recommend original Kanefusa oil lubricant.

Material	Mist fluid	Composition	Dropping speed (1drop)	Characteristics
Mild steel	Supralube 25-II	Vegetable ester	5-6 s	High viscosity
Stainless steel	Supralube 60S	Sulfur mineral	1-2 s	Stainless steel, die steel
Non - ferrous steel	Supralube 10P	Distilled vegetable ester	2-5 s	Odorless, low viscosity



Product Line Up


Tube Max Orbital



Application: For pipe cutting with an orbital flying cut-off machine

Cutting material: ERW pipes, Welded pipes

Edge Material: Coated Tungsten Carbide



- ▶ Improved blade shape and coating achieve better wear-resistance and product lifetime. Maintains stability even when cutting high-tensile steel pipes at high speeds (600m/min), making it possible to increase productivity by speeding up the manufacturing line.

PAT.US10583505, EP3305450B1, CN ZL201680049006.5, RU2686989C1


Tube Max Scarf



Application: For pipe cutting with a single and twin flying cut-off machine

Cutting material: ERW pipes, Welded pipes with scarfing (unfixed welding beads)

Edge Material: Coated Tungsten Carbide



- ▶ Improved tooth shape and wear-resistant tip grade minimize product defects that occur due to scarfs (unfixed welding beads) on the pipe.
- ▶ The proprietary coating realizes a longer service life and improve product stability.

With scarf
→ unfixed welding beads

PAT. EP2949414, CN ZL201480010372.0


Tube Max



Application: For pipe cutting with a single and twin flying cut-off machine

Cutting material: ERW pipes, Welded pipes without scarfing (unfixed welding beads)

Edge Material: Coated tungsten carbide



- ▶ Specialized in Heat- and wear-resistance more than Tube Max Scarf, for cutting without scarfs (unfixed weld beads) or less defects occurring due to scarfs.
- ▶ The proprietary coating realizes a longer service life and improve product stability.

Without scarf
→ fixed welding beads

Ferrous Cold Sawblade



Application: Cut solids and tubes

Edge Material: Cermat, Tungsten Carbide, and Coated Tungsten Carbide

Lubricant: Supralube 25

- ▶ Universal application and high performance



Non-Ferrous Cold Sawblade

Application: Cut non-ferrous solids (Aluminum Alloy and Copper Alloy)

Edge Material: Tungsten Carbide
Lubricant: Supralube 10P

- ▶ Reliable performance for each customer's special requirement.



Asia

KANEFUSA CORPORATION

Head Office / Factory

1-1, Nakaoguchi, Ohguchi-cho, Niwa-Gun,
Aichi-ken, Japan, Postal Code 480-0192
Tel : +81 587 95 7221 Fax : +81 587 95 7226
E-mail:sales-ex@kanefusa.co.jp

PT. KANEFUSA INDONESIA

EJIP Industrial Park, Jl. Ciujung Plot 8 D, South Cikarang,
Bekasi 17530, West Java, Indonesia
Tel : +62 21 897 0360 Fax: +62 21 897 0286
+62 21 897 0287
E-mail : sales@kanefusa.co.id

Surabaya Service Center

JL. Berbek Industri VII/5B Kawasan Industri Sier Surabaya, Indonesia
Tel : +62 31 849 1784 Fax: +62 31 849 2784

KANEFUSA CHINA CORPORATION

NO.50 Zhuzhu Road, Lujia Town Kunshan city, Jiangsu, China
Tel : +86 512 57875072 Fax: +86 512 57875073
E-mail : yy@kanefusa-cn.com

Tianjin Office

Sanjinglu No.5 Dongli economic development zone Tianjin city China
Tel : +86 22 5823 7633 Fax: +86 22 5823 7632
E-mail : tjkc03@kanefusa-cn.com

Guangdong Office

No.2 Danhen Road, Danzao Town Foshan City, Guangdong, China
Tel : +86 757 85406562 Fax: +86 757 85406571
E-mail : fssales@kanefusa-cn.com

KANEFUSA INDIA PRIVATE LIMITED

Plot No.169, Sector-8, IMT Manesar, Gurgaon,
Haryana PIN 122-051 India
Tel : +91 124 420 8440 Fax: +91 124 420 8441
E-mail : info@kanefusa.co.in

KANEFUSA VIETNAM MANUFACTURING CO., LTD.

Plot No. C 11-22-23, Thang Long Industrial Park (Vinh Phuc),
Thien Ke Commune, Binh Xuyen District, Vinh Phuc Province, Vietnam
Tel : +84 0211 3510 992 Fax : +84 0211 3510 990

KANEFUSA VIETNAM CO., LTD.

Road No.N3-2, Long Duc IP, Long Duc Ward,
Long Thanh District, Dong Nai Province, Vietnam
Tel : +84 251 368 1400 Fax: +84 251 368 1402
E-mail : sales@kanefusa-vn.com

Americas

KANEFUSA USA, INC.

621 Dolwick Drive Erlanger, KY 41018, USA
Tel : +1 859 283 1450 Fax: +1 859 283 5256
E-mail : sales@kanefusa-na.com

KANEFUSA DO BRASIL LTDA.

Rua Bom Pastor, 2732 Bloco Torre Sul - Sala 73
São Paulo - SP Cep:04203-003, Brasil
Tel : +55 11 2372 7664 Fax: +55 11 2372 7663
E-mail : vendas@kanefusa.net.br

Joinville Service Center

Rua Helmuth Fallgatter 1937, Joinville-SC CEP: 89206-101, Brasil
Tel : +55-47-3439-5486

KANEFUSA MEXICO S.A. DE C.V.

Circuito Logistic Aeropuerto No.4 Fracc.1 Lote2 Predio San
Antonio Texas Silao Guanajuato C.P. 36273 Mexico
Tel : +52 472 7486314/3 Fax: +52 472 7486313
E-mail : sales@kanefusa.com.mx

Europe

KANEFUSA EUROPE B.V.

De Witbogt 12, 5652 AG, Eindhoven, The Netherlands
Tel : +31 40 2900 901
E-mail : info@kanefusa.nl

Sawblades for Wood

Kreissägeblätter für Holz

Complete Selection for All Applications

Eine komplette Vorstellung für alle Anwendungen



Complete Selection for All Applications

Eine komplette Vorstellung für alle Anwendungen

- KANEFUSA carbide sawblade is accurately designed to meet the ever-diversifying needs of our customers and to satisfy every cutting requirement for a variety of machines.

- The variety selection of stock items cover the wide range of application and the custom made sawblade is also available.

Application: Natural Wood, Plywood, Composite Laminated Wood, Plywood
Plastic and Other Synthetic Resins, Particle Board, Non-Ferrous Material, Thin Steel Plate

- Die KANEFUSA-Sägeblätter erfüllen die verschiedensten Anforderungen der Kunden und können auf einer Vielzahl von Maschinen verwendet werden.

- Die Sägeblätter mit Standardausführungen sind für einen breiten Anwendungsbereich einstellbar. Außerdem können die Sägeblätter auch nach Kundenswünschen hergestellt werden.

Anwendungsbereich: Naturholz, Sperrholz, laminierte Spanplatten, Furniere, Kunststoffe, NE Metal, dünne Stahlplatten

Board Materials

Plattenwerkstoffe



〈TDM Type〉

New and Improved Finish Cut Panel Sizing Sawblade

- New tooth geometry and new random pitch reduce chipping and waving on the board edge.

• Material
Core : Particleboard, MDF, HDF
Lamination : Melamine, HPL, Paper, foil

Neues und verbessertes Kreissägeblatt für die Fertigungschnitt-Plattenaufteilung

- Neue Zahngeometrie und neue ungleichmäßige Zahnteilung reduzieren Abplatzungen und Wellenbildung an der Schnittkante.

• Werkstoff
Trägermaterial : Spanplatte, MDF, HDF
Beschichtung : Melamin, HPL, Papier, Folien

Super Board Pro III

Heavy Duty Panel Sizing Sawblade

- Special carbide grade outlasts conventional grades 2-3 times enabling more machine run time
- Sawblade runs quieter due to vibration damping slits in the plate
- Extreme flat plate and tight manufacturing tolerances enable a truer run out for a better cut quality

Plattenaufteilkreissägeblatt

- Eine spezielle Hartmetallsorte ermöglicht bis zu 3fache Standwege im Vergleich zu normaler Qualität und erlaubt damit eine höhere Maschinenverfügbarkeit sowie reduziert die anfallenden Schärfkosten
- Durch die Vibrationsdämpfungselemente im Stammblatt läuft das Kreissägeblatt sehr ruhig
- Ein extrem guter Planlauf ermöglicht eine bessere Schnittgüte

〈D-type〉

Heavy Duty Panel Sizing Sawblade

• Material
Core : Particleboard, MDF, HDF
Lamination : Melamine, HPL, Paper, foil

Plattenaufteilkreissägeblatt

• Werkstoff
Trägermaterial : Spanplatte, MDF, HDF
Beschichtung : Melamin, HPL, Papier, Folien

〈TD Type〉

Finish Cut Panel Sizing Sawblade

- TD - type tooth shape enables finish cut quality

• Material
Core : Particleboard, MDF, HDF
Lamination : Melamine, HPL, Paper, foil

Plattenaufteilkreissägeblatt

- Die TD-Zahngeometrie ermöglicht Fertigschnittqualität

• Werkstoff
Trägermaterial : Spanplatte, MDF, HDF
Beschichtung : Melamin, HPL, Papier, Folien



Board Pro

Panel Sizing Sawblade

- Sawblade runs quieter due to vibration damping elements in the plate
- Extreme flat plate and tight manufacturing tolerances enable a truer run out for a better cut quality

Plattenaufteilkreissägeblatt

- Durch Vibrationsdämpfungselemente im Stammblatt läuft das Kreissägeblatt sehr ruhig
- Ein extrem guter Planlauf ermöglicht eine bessere Schnittgüte

〈D-type〉

Panel Sizing Sawblade

- Material
Core : Particleboard, MDF, HDF
Lamination : Melamine, HPL, paper, foil

Plattenaufteilkreissägeblatt

- Werkstoff
Trägermaterial : Spanplatte, MDF, HDF
Beschichtung : Melamin, HPL, Papier, Folien

〈BC type〉

Panel Sizing Sawblade

- Material
Core : Particleboard, MDF, HDF, plywood, OSB
Lamination : Paper, foil, veneer

Plattenaufteilkreissägeblatt

- Werkstoff
Trägermaterial : Spanplatte, MDF, HDF, OSB, Sperrholz, Tischlerplatte
Beschichtung : Papier, Folien, Furnier



〈Scoring〉

Scoring Sawblade

- Scoring of laminated panel material to avoid tear outs on the bottom

Vorritzkreissägeblatt

- Vorritzen von beschichteten Plattenwerkstoffen auf der Unterseite



Eco Sawblade

Hollow Face Panel Sizing Sawblade

- Special carbide grade outlasts conventional grades 2-3 times
- Sawblade runs quieter due to vibration damping slits in the plate
- DH tooth type for cutting of raw particleboard and MDF as well as paper and veneered panels
- DHC tooth type for cutting plastic laminated particleboard or MDF

<Dach-Hohlzahnkreisägeblatt>

- Spezielle Hartmetallsorte ermöglicht bis zu 3fache Standwege
- Durch Vibrationsdämpfungselemente im Stammblatt läuft das Kreissägeblatt sehr ruhig
- Zahnform DH ist geeignet für den Zuschnitt von Papier, Folie oder Furnier belegten Platten
- Zahnform DHC ist geeignet für den Zuschnitt von Melamin oder HPL belegten Platten



Board Pro NEO

Finish Cut For Table Sawblade

- Even and straight saw plate
- Vibration damping slits into the plate
- Tipped with a highly durable Tungsten Carbide grade
- Outlasts conventional sawblades up to 2 times
- Runs very quiet
- Cuts clean and straight

Tischkreissäge für Fertigschnitt

- Ebenes, absolut gerades Sägeblatt
- Vibrationsdämpfungs Elemente sind in den Grundkörper integriert
- Sehr abriebfestes Hartmetall
- 2fache Standzeit gegenüber herkömmlichen Kreissägeblättern
- ruhiger Lauf
- Sauberer, gerader Schnitt



Board Pro DIA

Heavy Duty Panel Sizing PCD Sawblade

- High quality PCD grades from leading PCD manufacturer enable longer edge life
- Available tooth geometries

PKD-Plattenaufteilkreissägeblatt

- Wir verwenden nur hochwertigen PKD namhafter Hersteller, was lange Standwege garantiert
- Andere Zahnformen sind auf Anfrage erhältlich

〈J type / BC type〉

Heavy Duty Panel Sizing PCD Sawblade

- J-Type (inverted V) is suitable for finish and rough cutting of panel materials with hard lamination on both sides, melamin board and various plastics
- BC-Type is suitable to cut plywood, raw particleboard and MDF

PKD-Plattenaufteilkreissägeblatt

- J-Type (Dachzahn / Flachzahn mit Fase) ist geeignet für das Schneiden belegter Plattenwerkstoffe, Zementfaserplatten und verschiedener Kunststoffe
- BC-Type (Wechselzahn) ist geeignet für das Schneiden von Sperrholz sowie unbeschichteter Spanplatten und MDF



DIA V-tech

Finish Cut Panel Sizing Sawblade

- Cutting forces are well in balance allowing a truer run out and better cut quality
- Because of the aggressive cutting edge, good cut quality on the bottom of the board is obtained

PKD-Fertigschnittkreissägeblatt

- Sehr guter Geradeauslauf, da die Schnittkräfte gut ausbalanciert sind
- Hohe Schnittigkeit erlaubt eine sehr gute Schnittqualität

Solid Wood Massivholz



Timber Max

Heavy Duty Rip Sawblade

- Stable and flat plate enables truer run-out for smoother finish and exact dimensions
- No or only little plate distortion after use reduces time for straightening after sharpening
- Durable and corrosion resistant carbide tips enable longer edge life

Wischerkreissägeblatt

- Stabiles und hochpräzises Stammblatt mit extrem guter Planlauf toleranz ermöglicht maßhaltigen Zuschnitt mit einer guten Schnitt oberfläche
- Geringes Verwerfen des Stammblattes reduziert den Richtaufwand
- Verschleißfeste Hartmetallzähne ermöglichen längere Standwege


Timber Max TK

Thin Kerf Splitting Sawblade

- Thin kerf enables a tremendous increase in yield rates

Dünnschnittkreissägeblatt

- Dünnschnittkreissägeblätter ermöglichen eine Verbesserung der Materialausbeute

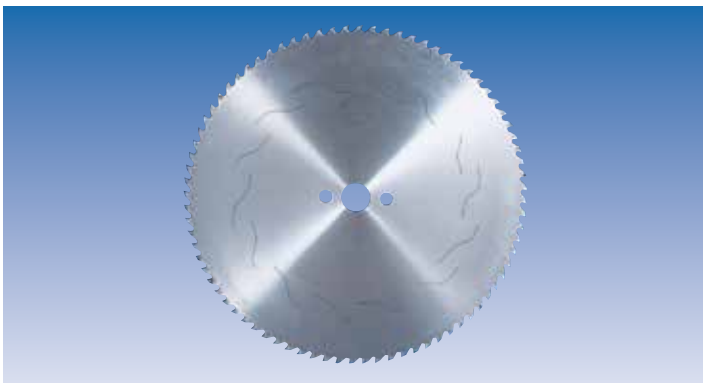

Yield Pro


Fine Cross Cut Sawblade

- Thin kerf enables a tremendous increase in yield rates
- Less waste must be exhausted from the machine

Dünnschnittkappkreissägeblatt für Querschnitte

- Dünnschnitt ermöglicht deutliche Materialeinsparungen
- Weniger Abfall muß von der Maschine entsorgt werden

BR PI0415439-8,CA2542470,CN ZL200480030284,DE602004020648,
GB EP1679165,IDP0024180,IN234055,IT EP1679165,KR10-1041312,
NO 333385,RU2348513,SE EP1679165,US8042443,TWI316882

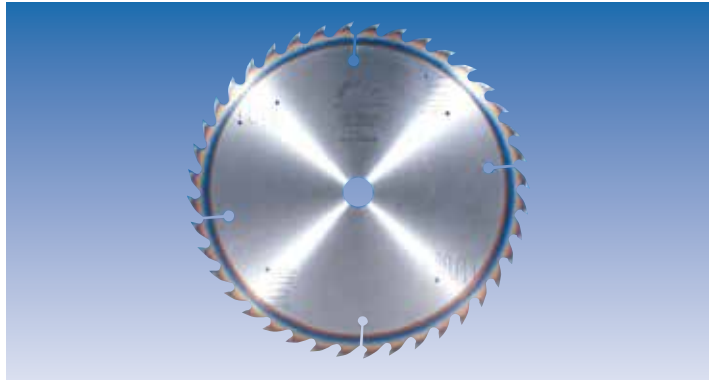


SF-Sawblade

Perfect Finish Sawblade

- Special tooth shape enables a nearly knife mark free cut finish
- Subsequent sanding or planing can be reduced or eliminated
- Advanced Material Technology reduces residue adhesion enables running consistently high feed rates

Beschichtete Hobelschnittkreissägeblatt für Längsaufteilen

- Dünnschnitt ermöglicht deutliche Materialeinsparungen
- Weniger Abfall muß von der Maschine entsorgt werden
- Läuft dauerhaft mit Taktzeiten von unter 0.2 Sekunden

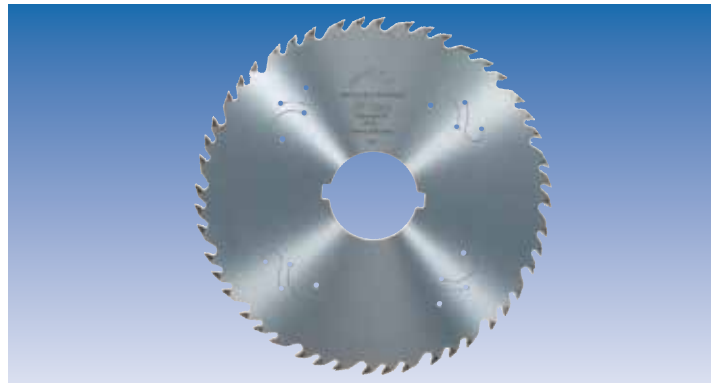

SF-Sawblade HV-type

Perfect Finish Sawblade

- Special tooth geometry for very smooth and tooth mark free sawn surface. Three tooth types are available.
- Complete vibration damping by special irregular gullet design.
- New laser slits with higher damping effect for saw body vibration and noise reduction.

Perfekte Oberfläche

- Eine spezielle Zahnform ermöglicht eine sehr glatte und markierungsfreie Oberfläche. Drei Zahnformen sind lieferbar.
- Vollständige Geräuschkämpfung durch spezielles, irreguläres Spanraumdesign.
- Neue Laserslitze mit höherem Dämpfungseffekt gegen Sägeblattvibrationen sowie erhöhter Geräuschreduktion.

CN ZL200910253229



<http://www.kanefusa.net>

E-mail : sales-ex@kanefusa.co.jp



Asia

KANEFUSA CORPORATION

Head Office / Factory

1-1, Nakaoguchi, Ohguchi-cho, Niwa-Gun,
Aichi-ken, Japan, Postal Code 480-0192
Tel : +81 587 95 7221 Fax: +81 587 95 7226
E-mail: sales-ex@kanefusa.co.jp

PT. KANEFUSA INDONESIA

EJIP Industrial Park, Jl. Ciujung Plot 8 D, South Cikarang,
Bekasi 17530, West Java, Indonesia
Tel : +62 21 897 0360 Fax: +62 21 897 0286
+62 21 897 0287
E-mail : sales@kanefusa.co.id

Surabaya Service Center

JL. Berbek Industri VII/5B Kawasan Industri Sier Surabaya, Indonesia
Tel : +62 31 849 1784 Fax: +62 31 849 2784

KANEFUSA CHINA CORPORATION

NO.50 Zhuzhu Road, Lujia Town Kunshan city, Jiangsu, China
Tel : +86 512 57875072 Fax: +86 512 57875073
E-mail : yy@kanefusa-cn.com

Tianjin Office

Sanjinglu No.5 Dongli economic development zone Tianjin city China
Tel : +86 22 5823 7633 Fax: +86 22 5823 7632
E-mail : tjkc03@kanefusa-cn.com

Guangdong Office

Nº2 Danhen Road, Danzao Town Foshan City, Guangdong, China
Tel : +86 757 85406562 Fax: +86 757 85406571
E-mail : fssales@kanefusa-cn.com

KANEFUSA INDIA PRIVATE LIMITED

Plot No.169, Sector-8, IMT Manesar, Gurgaon,
Haryana PIN 122-051, India
Tel : +91 124 420 8440 Fax: +91 124 420 8441
E-mail : info@kanefusa.co.in

KANEFUSA VIETNAM MANUFACTURING CO., LTD.

Plot No. C 11-22-23, Thang Long Industrial Park (Vinh Phuc),
Thien Ke Commune, Binh Xuyen District, Vinh Phuc Province, Vietnam
Tel : +84 0211 3510 992 Fax: +84 0211 3510 990

KANEFUSA VIETNAM CO., LTD.

Road No.N3-2, Long Duc IP, Long Duc Ward,
Long Thanh District, Dong Nai Province, Vietnam
Tel : +84 251 368 1400 Fax: +84 251 368 1402
E-mail : sales@kanefusa-vn.com

Americas

KANEFUSA USA, INC.

621 Dolwick Drive Erlanger, KY 41018, USA
Tel : +1 859 283 1450 Fax: +1 859 283 5256
E-mail : sales@kanefusa-na.com

KANEFUSA DO BRASIL LTDA.

Rua Bom Pastor, 2732 Bloco Torre Sul - Sala 73
São Paulo - SP Cep:04203-003, Brasil
Tel : +55 11 2372 7664 Fax: +55 11 2372 7663
E-mail : vendas@kanefusa.net.br

Joinville Service Center

Rua Helmuth Fallgatter 1937, Joinville-SC CEP: 89206-101, Brasil
Tel : +55-47-3439-5486

KANEFUSA MEXICO S.A. DE C.V.

Circuito Logistic Aeropuerto No.4 Fracc.1 Lote2 Predio San
Antonio Texas Silao Guanajuato C.P. 36273 Mexico
Tel : +52 472 7486314/3 Fax: +52 472 74863 13
E-mail : sales@kanefusa.com.mx

Europe

KANEFUSA EUROPE B.V.

De Witbogt 12, 5652 AG, Eindhoven, The Netherlands
Tel : +31 40 2900 901
E-mail : info@kanefusa.nl