

# LED enclosure light - PLD E 409 W 350



1319569

<https://www.phoenixcontact.com/gb/products/1319569>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



LED enclosure light, 24 V AC/DC ... 240 V AC/DC, length: 350 mm, degree of protection: IP20, can be swiveled ( $\pm 90^\circ$  swivel range), including mounting accessories

## Product Description

The LED light is designed to illuminate the interior of control cabinets. The prismatic integrated into the light cover ensures optimum illumination of the control cabinet. You can use magnets or screws to affix the light holder. The light can swivel in the holder. Connect the supply voltage to the light via Push-in connection. You do not require special connectors for this. You can connect several lights in succession. A button is used to switch the light on and off.

## Your advantages

- Series connection reduces cabling effort for control cabinets arranged in series
- Optimum lighting of the control cabinet, thanks to integrated prismatics and capacity to swivel
- Swiveling enables optimum adjustment to the relevant control cabinet depth
- LED service life of 50,000 h (L70 value) prevents bulb replacement

## Commercial Data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1319569       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales Key                            | DRL232        |
| Product Key                          | DRL232        |
| GTIN                                 | 4063151602888 |
| Weight per Piece (including packing) | 226 g         |
| Weight per Piece (excluding packing) | 150 g         |
| Customs tariff number                | 94054231      |
| Country of origin                    | DE            |

# LED enclosure light - PLD E 409 W 350



1319569

<https://www.phoenixcontact.com/gb/products/1319569>

## Technical Data

### Product properties

|                   |                 |
|-------------------|-----------------|
| Product type      | Light           |
| Mounting position | any             |
| Application       | Control cabinet |
| Socket            | none            |

### Electrical properties

Supply: Module electronics

|                      |  |
|----------------------|--|
| Connection method    | Push-in connection                                   |
| Number of positions  | 2  |
| Supply voltage range | 24 V AC/DC ... 240 V AC/DC $\pm 5\%$ (50/60 Hz (AC)) |
| Power consumption    | 6 W  |

### Connection data


|   |   |
|---|---|
| Connection method   | Push-in connection  |
| Conductor cross section, rigid  | 0.13 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>              |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (DIN 46228-1) |
| Stripping length  | 10 mm   |

### LED signaling

Light properties

|                                  |  |
|----------------------------------|--|
| Source of light type             | LED  |
| Number of LEDs                   | 18   |
| Service life, lighting appliance | 50000 h  |
| Color temperature                | 5000 K   |
| Color rendering index            | 85   |
| Luminous flux                    | 700 lm (Net luminous flux)                                       |
| Illumination                     | max. 1200 lx (50 cm distance)<br>max. 450 lx (Distance of 1 m)   |
| Ordinance                        | Delegated Regulation (EU) 2019/2015                              |
| Energy efficiency class          | D (1 light source)   |
| Note                             | This product contains an energy efficiency class D light source. |

### Dimensions

|                     |  |
|---------------------|--|
| Dimensional drawing |  |
| Width               | 30 mm  |

# LED enclosure light - PLD E 409 W 350



1319569

<https://www.phoenixcontact.com/gb/products/1319569>

|        |        |
|--------|--------|
| Height | 40 mm  |
| Length | 350 mm |

## Material specifications

|       |                         |
|-------|-------------------------|
| Color | traffic grey A RAL 7042 |
|-------|-------------------------|

## Environmental and real-life conditions

### Ambient conditions

|  |                  |
|--|------------------|
| Ambient temperature (operation)          | -25 °C ... 60 °C |
| Degree of protection                     | IP20             |
| Ambient temperature (storage/transport)  | -40 °C ... 85 °C |
| Permissible humidity (operation)         | 5 % ... 90 %     |
| Permissible humidity (storage/transport) | 5 % ... 90 %     |

## Standards and regulations


|                  |    |
|------------------|----|
| Protection class | II |
|------------------|----|

## Mounting

|                   |                       |
|-------------------|-----------------------|
| Mounting type     | Screw/magnet mounting |
| Mounting position | any                   |


## Drawings

Block diagram

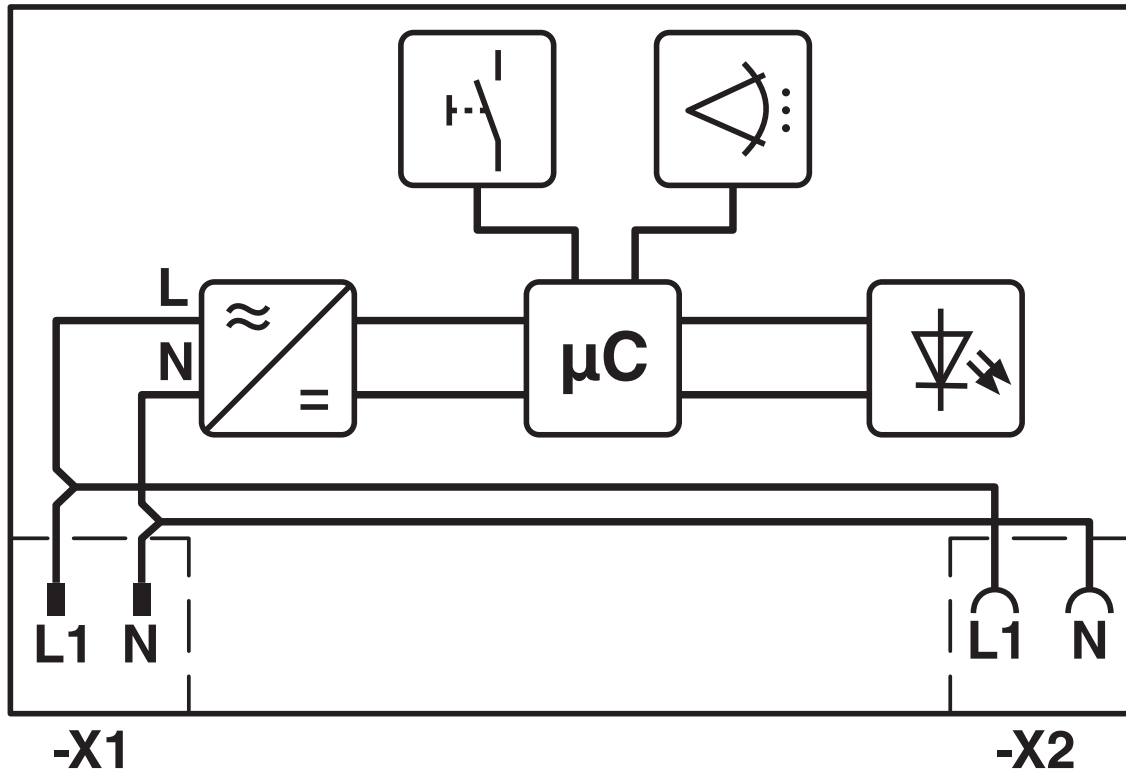

Internal wiring (motion detector only with PLD E 409 W 350 MS)

Schematic diagram



Series connection of two lights


# LED enclosure light - PLD E 409 W 350



1319569


<https://www.phoenixcontact.com/gb/products/1319569>

Dimensional drawing

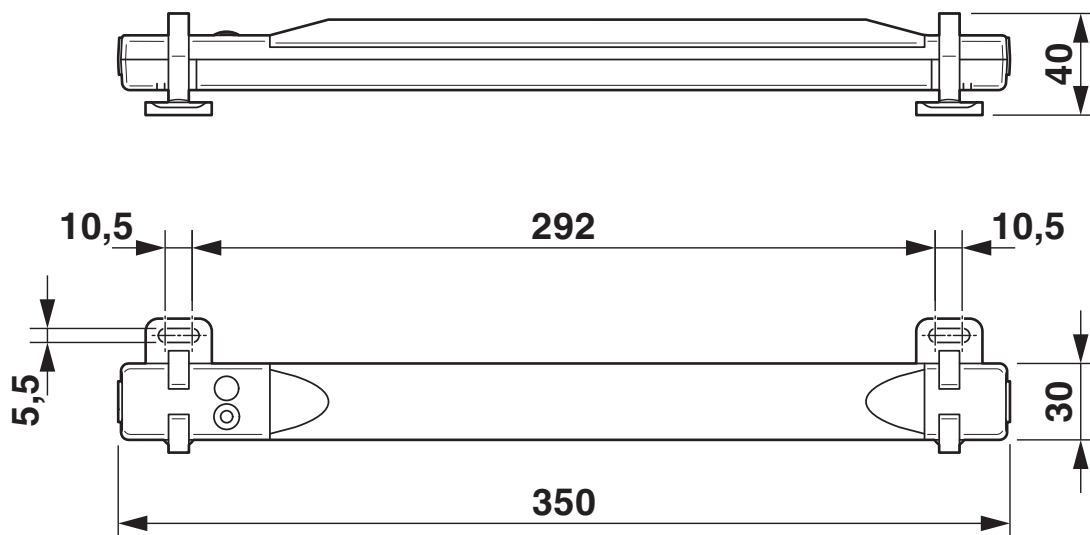

Dimensions (in mm)

Schematic diagram

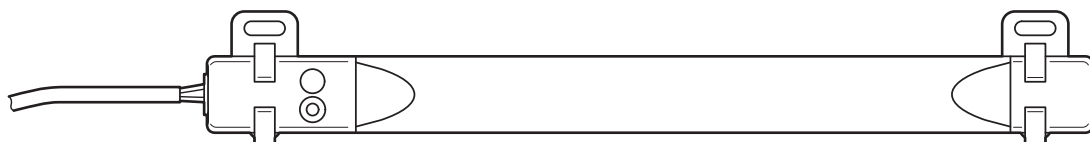

Connection of a light

# LED enclosure light - PLD E 409 W 350



1319569

<https://www.phoenixcontact.com/gb/products/1319569>

## Approvals



**cUL Recognized**

Approval ID: FILE E 255026



**UL Recognized**

Approval ID: FILE E 255026

**cULus Recognized**

# LED enclosure light - PLD E 409 W 350



1319569

<https://www.phoenixcontact.com/gb/products/1319569>

## Classifications

### ECLASS

|               |          |
|---------------|----------|
| ECLASS-9.0    | 27189241 |
| ECLASS-10.0.1 | 27182808 |
| ECLASS-11.0   | 27182808 |

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC000321 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 32151500 |
|-------------|----------|

# LED enclosure light - PLD E 409 W 350



1319569

<https://www.phoenixcontact.com/gb/products/1319569>

## Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |



# LED enclosure light - PLD E 409 W 350



1319569

<https://www.phoenixcontact.com/gb/products/1319569>

## Accessories

### Door position switch

Door position switch - PLD E 400-DS-3,0/0,6 - 1318672

<https://www.phoenixcontact.com/gb/products/1318672>



Door position switch with 3 m cable with open cable end and 0.6 m cable with open cable end, including mounting accessories

---

Phoenix Contact 2022 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd  
Halesfield 13, Telford  
Shropshire, TF7 4PG  
01952 681700  
[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)