```
C:\Users\sri sadha>arp -a

Interface: 169.254.132.119 --- 0xb
  Internet Address      Physical Address      Type
  169.254.255.255       ff-ff-ff-ff-ff-ff     static
  224.0.0.22            01-00-5e-00-00-16     static
  224.0.0.251           01-00-5e-00-00-fb     static
  224.0.0.252           01-00-5e-00-00-fc     static
  239.255.255.250       01-00-5e-7f-ff-fa     static
  255.255.255.255       ff-ff-ff-ff-ff-ff     static

Interface: 169.254.192.205 --- 0xc
  Internet Address      Physical Address      Type
  169.254.255.255       ff-ff-ff-ff-ff-ff     static
  224.0.0.22            01-00-5e-00-00-16     static
  224.0.0.251           01-00-5e-00-00-fb     static
  224.0.0.252           01-00-5e-00-00-fc     static
  239.255.255.250       01-00-5e-7f-ff-fa     static
  255.255.255.255       ff-ff-ff-ff-ff-ff     static

Interface: 10.90.125.149 --- 0x14
  Internet Address      Physical Address      Type
  10.90.125.211         9e-37-67-0c-3b-79     dynamic
  10.90.125.255         ff-ff-ff-ff-ff-ff     static
  224.0.0.22            01-00-5e-00-00-16     static
  224.0.0.251           01-00-5e-00-00-fb     static
  224.0.0.252           01-00-5e-00-00-fc     static
  239.255.255.250       01-00-5e-7f-ff-fa     static
  255.255.255.255       ff-ff-ff-ff-ff-ff     static
```

```
C:\Users\sri sadha>ipconfig /all

Windows IP Configuration

   Host Name . . . . . . . . . . . . : LAPTOP-5SNLPGRL
   Primary Dns Suffix  . . . . . . . :
   Node Type . . . . . . . . . . . . : Mixed
   IP Routing Enabled. . . . . . . . : No
   WINS Proxy Enabled. . . . . . . . : No

Ethernet adapter Ethernet 2:

   Connection-specific DNS Suffix  . :
   Description . . . . . . . . . . . : VirtualBox Host-Only Ethernet Adapter
   Physical Address. . . . . . . . . : 0A-00-27-00-00-0C
   DHCP Enabled. . . . . . . . . . . : Yes
   Autoconfiguration Enabled . . . . : Yes
   Link-local IPv6 Address . . . . . : fe80::84c3:5e7c:d804:6f0a%12(Preferred)
   Autoconfiguration IPv4 Address. . : 169.254.192.205(Preferred)
   Subnet Mask . . . . . . . . . . . : 255.255.0.0
   Default Gateway . . . . . . . . . :
   DHCPv6 IAID . . . . . . . . . . . : 403308583
   DHCPv6 Client DUID. . . . . . . . : 00-01-00-01-2F-80-95-84-94-BB-43-1B-C3-25
   NetBIOS over Tcpip. . . . . . . . : Enabled

Ethernet adapter Ethernet 3:

   Connection-specific DNS Suffix  . :
   Description . . . . . . . . . . . : VirtualBox Host-Only Ethernet Adapter #2
   Physical Address. . . . . . . . . : 0A-00-27-00-00-0B
   DHCP Enabled. . . . . . . . . . . : Yes
   Autoconfiguration Enabled . . . . : Yes
   Link-local IPv6 Address . . . . . : fe80::79f4:1a53:6a50:aa61%11(Preferred)
   Autoconfiguration IPv4 Address. . : 169.254.132.119(Preferred)
   Subnet Mask . . . . . . . . . . . : 255.255.0.0
   Default Gateway . . . . . . . . . :
   DHCPv6 IAID . . . . . . . . . . . : 688521255
   DHCPv6 Client DUID. . . . . . . . : 00-01-00-01-2F-80-95-84-94-BB-43-1B-C3-25
   NetBIOS over Tcpip. . . . . . . . : Enabled

Wireless LAN adapter Local Area Connection* 3:

   Media State . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . :
   Description . . . . . . . . . . . : Microsoft Wi-Fi Direct Virtual Adapter #3
   Physical Address. . . . . . . . . : 96-BB-43-1B-C3-25
   DHCP Enabled. . . . . . . . . . . : Yes
   Autoconfiguration Enabled . . . . : Yes
```

```
C:\Users\sri sadha>netstat -r
===========================================================================
Interface List
 12...0a 00 27 00 00 0c ......VirtualBox Host-Only Ethernet Adapter
 11...0a 00 27 00 00 0b ......VirtualBox Host-Only Ethernet Adapter #2
 13...96 bb 43 1b c3 25 ......Microsoft Wi-Fi Direct Virtual Adapter #3
 18...96 bb 43 1b c3 35 ......Microsoft Wi-Fi Direct Virtual Adapter #4
 20...94 bb 43 1b c3 25 ......MediaTek MT7921 Wi-Fi 6 802.11ax PCIe Adapter
  1...........................Software Loopback Interface 1
===========================================================================

IPv4 Route Table
===========================================================================
Active Routes:
Network Destination        Netmask          Gateway       Interface  Metric
          0.0.0.0          0.0.0.0    10.90.125.211    10.90.125.149     50
       10.90.125.0    255.255.255.0         On-link     10.90.125.149    306
    10.90.125.149  255.255.255.255         On-link     10.90.125.149    306
    10.90.125.255  255.255.255.255         On-link     10.90.125.149    306
        127.0.0.0        255.0.0.0         On-link         127.0.0.1    331
        127.0.0.1  255.255.255.255         On-link         127.0.0.1    331
  127.255.255.255  255.255.255.255         On-link         127.0.0.1    331
      169.254.0.0      255.255.0.0         On-link   169.254.192.205    281
      169.254.0.0      255.255.0.0         On-link   169.254.132.119    281
  169.254.132.119  255.255.255.255         On-link   169.254.132.119    281
  169.254.192.205  255.255.255.255         On-link   169.254.192.205    281
  169.254.255.255  255.255.255.255         On-link   169.254.192.205    281
  169.254.255.255  255.255.255.255         On-link   169.254.132.119    281
        224.0.0.0        240.0.0.0         On-link         127.0.0.1    331
        224.0.0.0        240.0.0.0         On-link   169.254.192.205    281
        224.0.0.0        240.0.0.0         On-link   169.254.132.119    281
        224.0.0.0        240.0.0.0         On-link    10.90.125.149    306
  255.255.255.255  255.255.255.255         On-link         127.0.0.1    331
  255.255.255.255  255.255.255.255         On-link   169.254.192.205    281
  255.255.255.255  255.255.255.255         On-link   169.254.132.119    281
  255.255.255.255  255.255.255.255         On-link    10.90.125.149    306
===========================================================================
Persistent Routes:
  None
```

```
C:\Users\sri sadha>nbtstat -a

Displays protocol statistics and current TCP/IP connections using NBT
(NetBIOS over TCP/IP).

NBTSTAT [ [-a RemoteName] [-A IP address] [-c] [-n]
        [-r] [-R] [-RR] [-s] [-S] [interval] ]

  -a   (adapter status) Lists the remote machine's name table given its name
  -A   (Adapter status) Lists the remote machine's name table given its
                        IP address.
  -c   (cache)          Lists NBT's cache of remote [machine] names and their IP addresses
  -n   (names)          Lists local NetBIOS names.
  -r   (resolved)       Lists names resolved by broadcast and via WINS
  -R   (Reload)         Purges and reloads the remote cache name table
  -S   (Sessions)       Lists sessions table with the destination IP addresses
  -s   (sessions)       Lists sessions table converting destination IP
                        addresses to computer NETBIOS names.
  -RR  (ReleaseRefresh) Sends Name Release packets to WINS and then, starts Refresh

  RemoteName   Remote host machine name.
  IP address   Dotted decimal representation of the IP address.
  interval     Redisplays selected statistics, pausing interval seconds
               between each display. Press Ctrl+C to stop redisplaying
               statistics.
```

```
C:\Users\sri sadha>nslookup www.google.com
Server:  UnKnown
Address:  10.90.125.211

Non-authoritative answer:
Name:    www.google.com
Addresses:  2001:4860:482b:7700::
          2001:4860:4829:7700::
          2001:4860:482c:7700::
          2001:4860:4827:7700::
          2001:4860:482d:7700::
          2001:4860:482a:7700::
          2001:4860:4826:7700::
          2001:4860:4828:7700::
          142.251.153.119
          142.251.152.119
          142.251.157.119
          142.251.151.119
          142.251.154.119
          142.251.150.119
          142.251.156.119
          142.251.155.119
```

```
C:\Users\sri sadha>route print
===========================================================================
Interface List
 12...0a 00 27 00 00 0c ......VirtualBox Host-Only Ethernet Adapter
 11...0a 00 27 00 00 0b ......VirtualBox Host-Only Ethernet Adapter #2
 13...96 bb 43 1b c3 25 ......Microsoft Wi-Fi Direct Virtual Adapter #3
 18...96 bb 43 1b c3 35 ......Microsoft Wi-Fi Direct Virtual Adapter #4
 20...94 bb 43 1b c3 25 ......MediaTek MT7921 Wi-Fi 6 802.11ax PCIe Adapter
  1...........................Software Loopback Interface 1
===========================================================================

IPv4 Route Table
===========================================================================
Active Routes:
Network Destination        Netmask          Gateway       Interface  Metric
          0.0.0.0          0.0.0.0    10.90.125.211    10.90.125.149     50
      10.90.125.0    255.255.255.0         On-link    10.90.125.149    306
    10.90.125.149  255.255.255.255         On-link    10.90.125.149    306
    10.90.125.255  255.255.255.255         On-link    10.90.125.149    306
        127.0.0.0        255.0.0.0         On-link         127.0.0.1    331
        127.0.0.1  255.255.255.255         On-link         127.0.0.1    331
  127.255.255.255  255.255.255.255         On-link         127.0.0.1    331
      169.254.0.0      255.255.0.0         On-link   169.254.192.205    281
      169.254.0.0      255.255.0.0         On-link   169.254.132.119    281
  169.254.132.119  255.255.255.255         On-link   169.254.132.119    281
  169.254.192.205  255.255.255.255         On-link   169.254.192.205    281
  169.254.255.255  255.255.255.255         On-link   169.254.192.205    281
  169.254.255.255  255.255.255.255         On-link   169.254.132.119    281
        224.0.0.0        240.0.0.0         On-link         127.0.0.1    331
        224.0.0.0        240.0.0.0         On-link   169.254.192.205    281
        224.0.0.0        240.0.0.0         On-link   169.254.132.119    281
        224.0.0.0        240.0.0.0         On-link    10.90.125.149    306
  255.255.255.255  255.255.255.255         On-link         127.0.0.1    331
  255.255.255.255  255.255.255.255         On-link   169.254.192.205    281
  255.255.255.255  255.255.255.255         On-link   169.254.132.119    281
  255.255.255.255  255.255.255.255         On-link    10.90.125.149    306
===========================================================================
Persistent Routes:
  None

IPv6 Route Table
===========================================================================
Active Routes:
 If Metric Network Destination      Gateway
 20     66 ::/0                     fe80::9c37:67ff:fe0c:3b79
  1    331 ::1/128                  On-link
 20     66 2409:40f4:40cc:7d23::/64 On-link
 20    306 2409:40f4:40cc:7d23:1c11:7cf7:c68:e506/128
                                    On-link
 20    306 2409:40f4:40cc:7d23:95ff:96dd:fd93:bd6e/128
                                    On-link
 12    281 fe80::/64                On-link
 11    281 fe80::/64                On-link
```

```
C:\Users\sri sadha>pathping

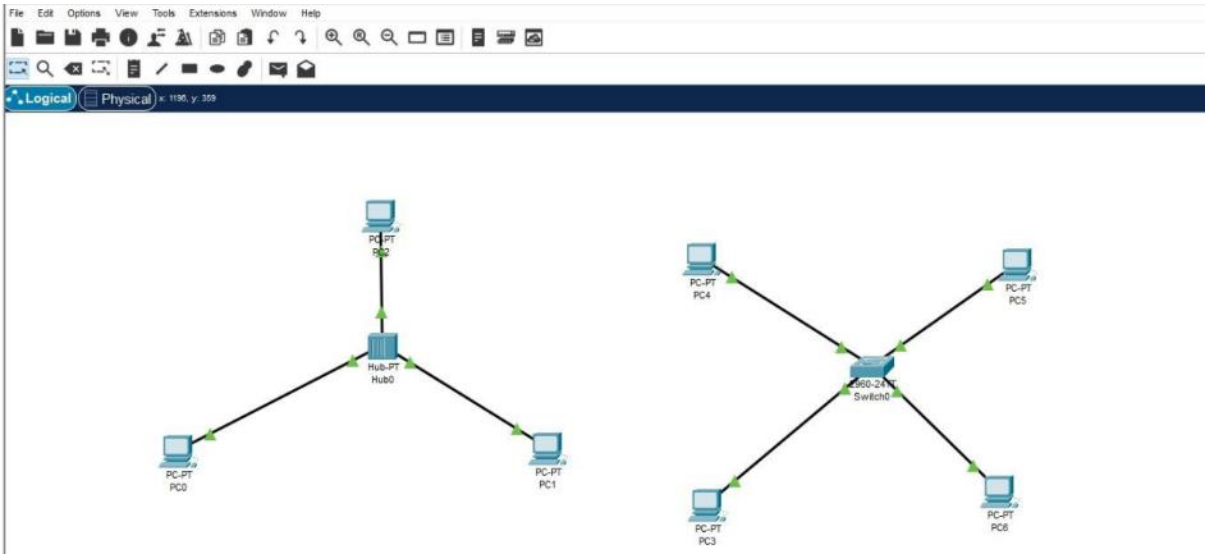
Usage: pathping [-g host-list] [-h maximum_hops] [-i address] [-n]
                [-p period] [-q num_queries] [-w timeout]
                [-4] [-6] target_name

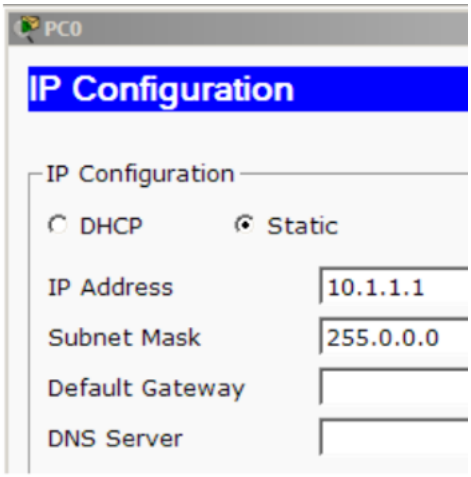
Options:
    -g host-list     Loose source route along host-list.
    -h maximum_hops  Maximum number of hops to search for target.
    -i address       Use the specified source address.
    -n               Do not resolve addresses to hostnames.
    -p period        Wait period milliseconds between pings.
    -q num_queries   Number of queries per hop.
    -w timeout       Wait timeout milliseconds for each reply.
    -4               Force using IPv4.
    -6               Force using IPv6.
```

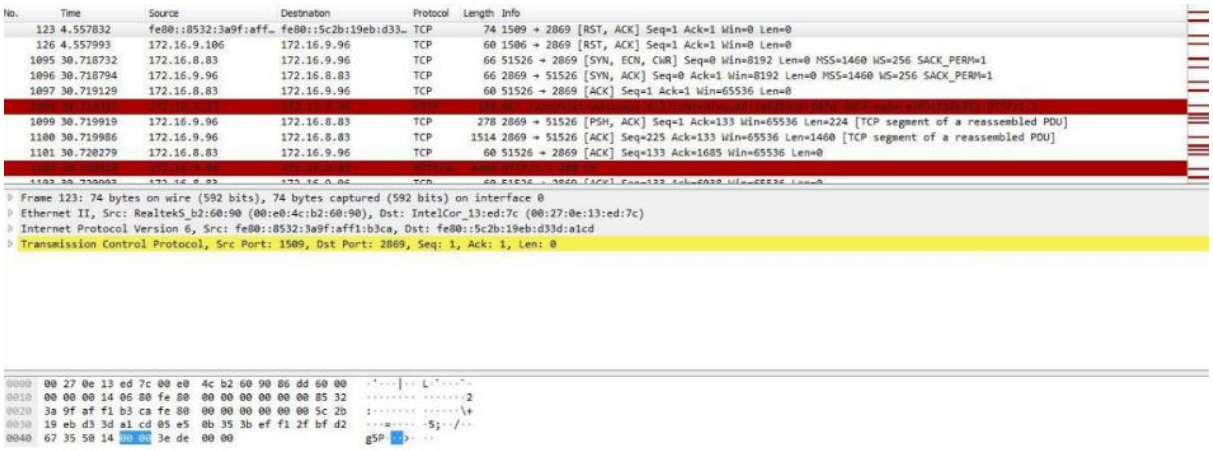
```
C:\Users\sri sadha>ping LAPTOP-5SNLPGRL

Pinging LAPTOP-5SNLPGRL [fe80::38f3:7a6c:ae35:d00d%20] with 32 bytes of data:
Reply from fe80::38f3:7a6c:ae35:d00d%20: time<1ms
Reply from fe80::38f3:7a6c:ae35:d00d%20: time<1ms
Reply from fe80::38f3:7a6c:ae35:d00d%20: time<1ms
Reply from fe80::38f3:7a6c:ae35:d00d%20: time<1ms

Ping statistics for fe80::38f3:7a6c:ae35:d00d%20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```


File Edit Options View Tools Extensions Window Help
Logical
Physical
PC-PT PC2
Hub-PT Hub0
PC-PT PC0
PC-PT PC1
PC-PT PC4
PC-PT PC5
Switch0
PC-PT PC3
PC-PT PC6


PC0
IP Configuration
IP Configuration
DHCP
Static
IP Address
10.1.1.1
Subnet Mask
255.0.0.0
Default Gateway
DNS Server

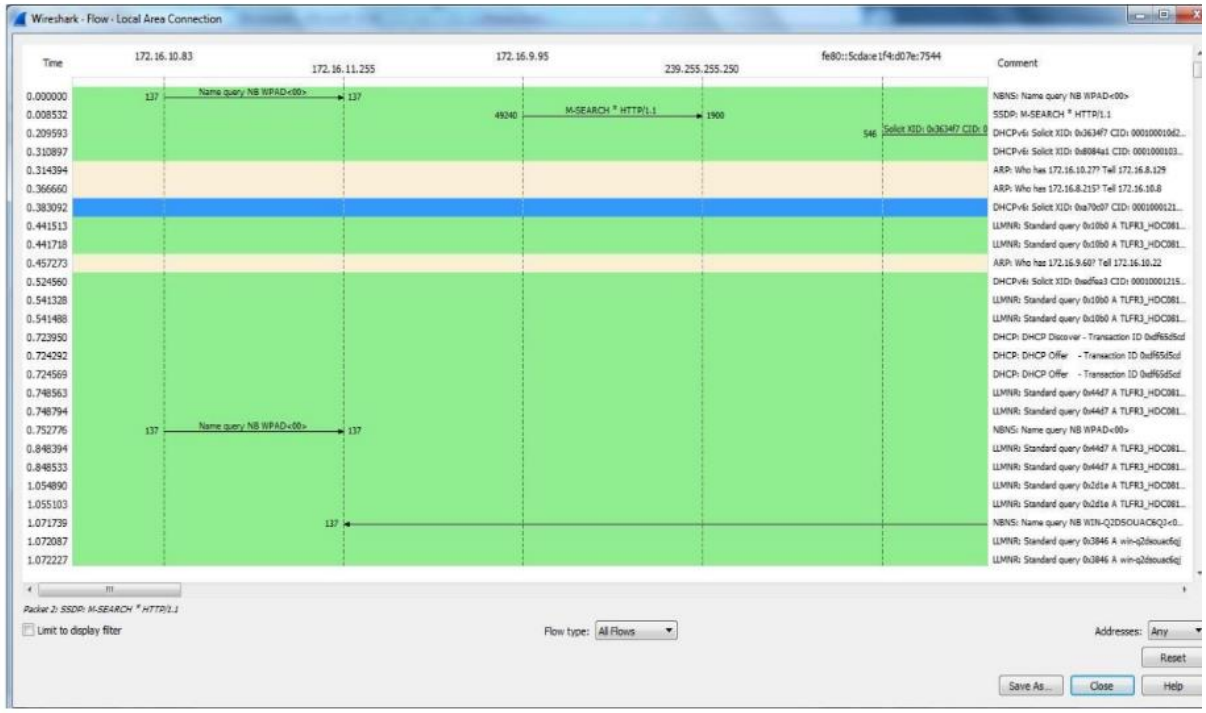

No. Time Source Destination Protocol Length Info
123 4.557832 fe80::8532:3a9f:aff… fe80::5c2b:19eb:d33… TCP 74 1509 → 2869 [RST, ACK] Seq=1 Ack=1 Win=0 Len=0
126 4.557993 172.16.9.106 172.16.9.96 TCP 60 1506 → 2869 [RST, ACK] Seq=1 Ack=1 Win=0 Len=0
1095 30.718732 172.16.8.83 172.16.9.96 TCP 66 51526 → 2869 [SYN, ECN, CWR] Seq=0 Win=8192 Len=0 MSS=1460 WS=256 SACK_PERM=1
1096 30.718794 172.16.9.96 172.16.8.83 TCP 66 2869 → 51526 [SYN, ACK] Seq=0 Ack=1 Win=8192 Len=0 MSS=1460 WS=256 SACK_PERM=1
1097 30.719129 172.16.8.83 172.16.9.96 TCP 60 51526 → 2869 [ACK] Seq=1 Ack=1 Win=65536 Len=0
1099 30.719919 172.16.9.96 172.16.8.83 TCP 278 2869 → 51526 [PSH, ACK] Seq=1 Ack=133 Win=65536 Len=224 [TCP segment of a reassembled PDU]
1100 30.719986 172.16.9.96 172.16.8.83 TCP 1514 2869 → 51526 [ACK] Seq=225 Ack=133 Win=65536 Len=1460 [TCP segment of a reassembled PDU]
1101 30.720279 172.16.8.83 172.16.9.96 TCP 60 51526 → 2869 [ACK] Seq=133 Ack=1685 Win=65536 Len=0
Frame 123: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface 0
Ethernet II, Src: RealtekS_b2:60:90 (00:e0:4c:b2:60:90), Dst: IntelCor_13:ed:7c (00:27:0e:13:ed:7c)
Internet Protocol Version 6, Src: fe80::8532:3a9f:aff1:b3ca, Dst: fe80::5c2b:19eb:d33d:a1cd
Transmission Control Protocol, Src Port: 1509, Dst Port: 2869, Seq: 1, Ack: 1, Len: 0
0000 00 27 0e 13 ed 7c 00 e0 4c b2 60 90 86 dd 60 00
0010 00 00 00 14 06 80 fe 80 00 00 00 00 00 00 85 32
0020 3a 9f af f1 b3 ca fe 80 00 00 00 00 00 00 5c 2b
0030 19 eb d3 3d a1 cd 05 e5 0b 35 3b ef f1 2f bf d2
0040 67 35 50 14 00 00 3e de 00 00

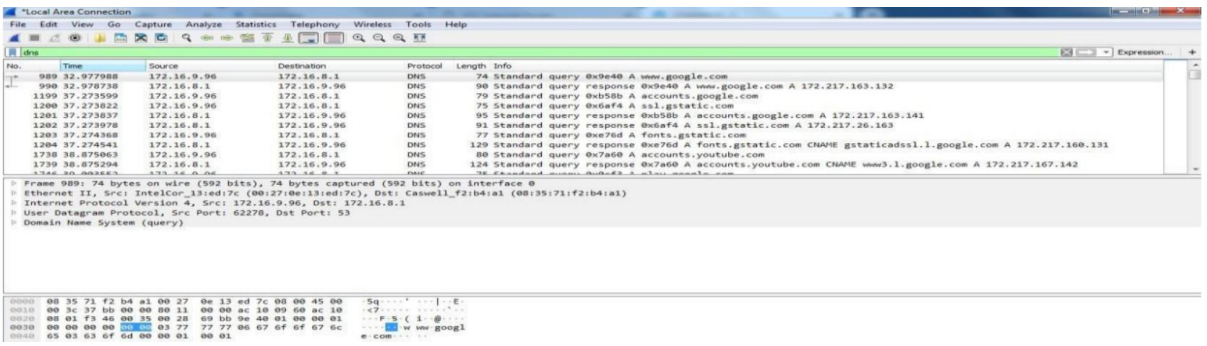
arp

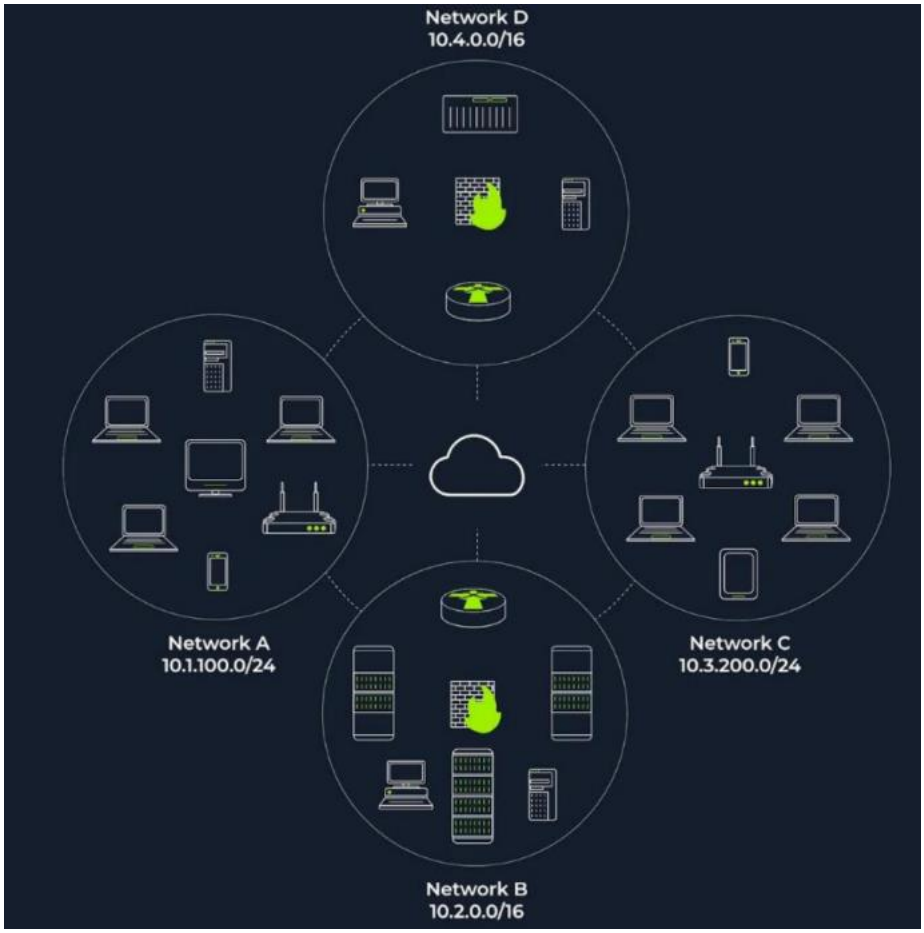
| No. | Time | Source | Destination | Protocol | Length | Info |
|---|---|---|---|---|---|---|
| 6 | 0.255305 | Foxconn_c9:c5:f0 | Broadcast | ARP | 60 | Who has 172.16.10.15? Tell 172.16.10.3 |
| 14 | 0.692936 | Foxconn_d0:ac:46 | Broadcast | ARP | 60 | Who has 172.16.8.39? Tell 172.16.10.8 |
| 19 | 1.418424 | Foxconn_c9:c9:91 | Broadcast | ARP | 60 | Who has 172.16.8.106? Tell 172.16.10.26 |
| 24 | 1.880729 | Foxconn_d0:ac:46 | Broadcast | ARP | 60 | Who has 172.16.8.40? Tell 172.16.10.8 |
| 27 | 2.029517 | Giga-Byt_92:d2:ef | Broadcast | ARP | 60 | Who has 172.16.10.33? Tell 172.16.10.1 |
| 41 | 2.509905 | Giga-Byt_7c:c5:34 | Broadcast | ARP | 60 | Who has 172.16.9.82? Tell 172.16.9.111 |
| 44 | 2.602358 | Foxconn_c9:c8:24 | Broadcast | ARP | 60 | Who has 172.16.8.139? Tell 172.16.10.22 |
| 46 | 2.743021 | Dell_35:11:11 | Broadcast | ARP | 60 | Who has 172.16.8.118? Tell 172.16.10.195 |
| 56 | 3.201822 | Giga-Byt_92:d2:ef | Broadcast | ARP | 60 | Who has 172.16.10.34? Tell 172.16.10.1 |
| 60 | 3.237061 | Giga-Byt_7c:c5:34 | Broadcast | ARP | 60 | Who has 172.16.9.82? Tell 172.16.9.111 |

```
▷ Frame 119: 42 bytes on wire (336 bits), 42 bytes captured (336 bits) on interface 0
▷ Ethernet II, Src: IntelCor_13:ed:7c (00:27:0e:13:ed:7c), Dst: RealtekS_b2:60:90 (00:e0:4c:b2:60:90)
▷ Address Resolution Protocol (reply)
```

```
0000  00 e0 4c b2 60 90 00 27  0e 13 ed 7c 08 06 00 01   ··L·`··'  ···|····
0010  08 00 06 04 00 02 00 27  0e 13 ed 7c ac 10 09 60   ·······'  ···|···`
0020  00 e0 4c b2 60 90 ac 10  09 6a                     ··L·`···  ·j
```




Network D
10.4.0.0/16
Network A
10.1.100.0/24
Network C
10.3.200.0/24
Network B
10.2.0.0/16

Send Packet

From:

computer1

To:

computer1

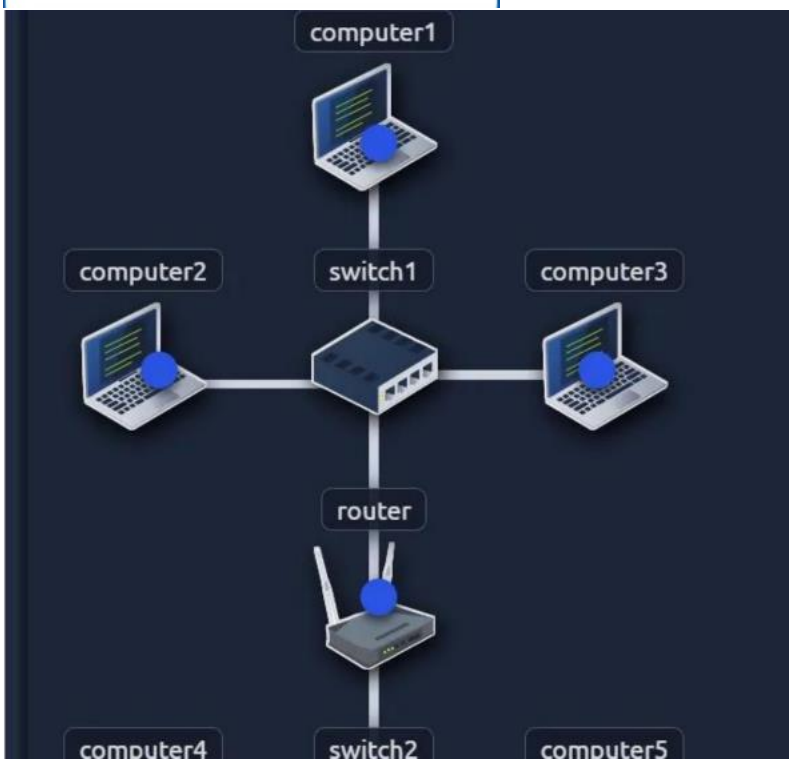
Packet Type:

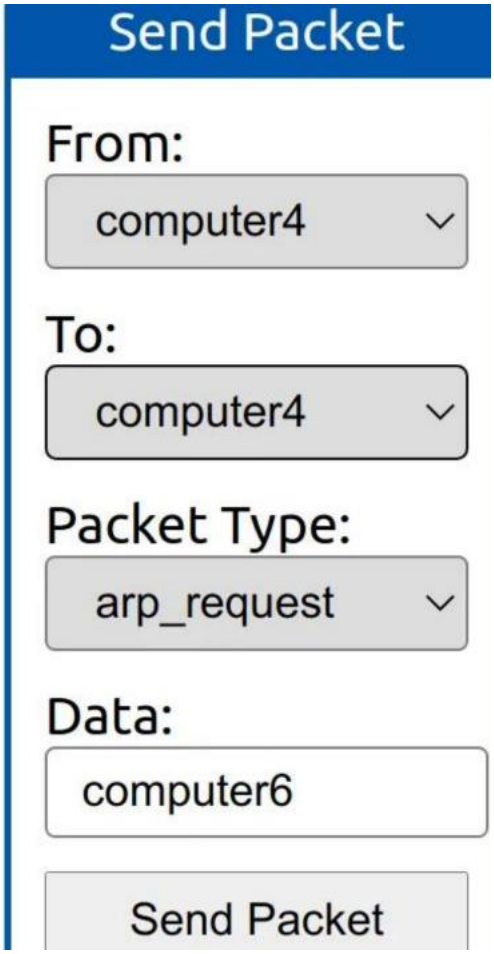
arp_request

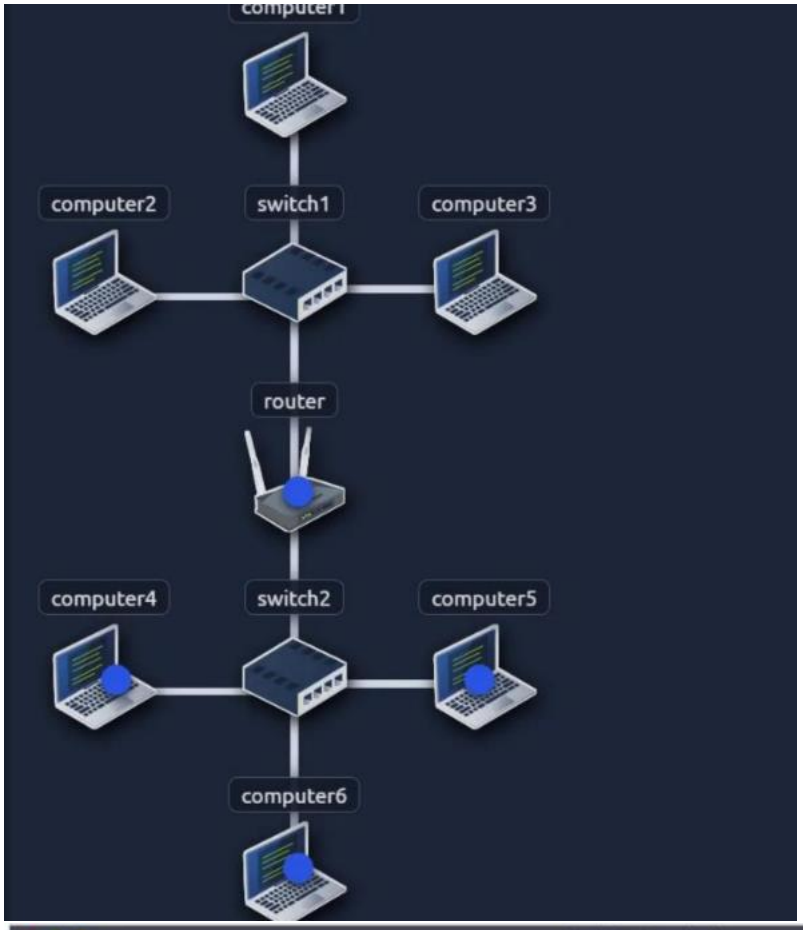
Data:

computer6

Send Packet




Send Packet
From:
computer4
To:
computer4
Packet Type:
arp_request
Data:
computer6
Send Packet




Pentester Terminal

```
pentester@TryHackMe$ sudo nmap -PR -sn 10.10.210.6/24

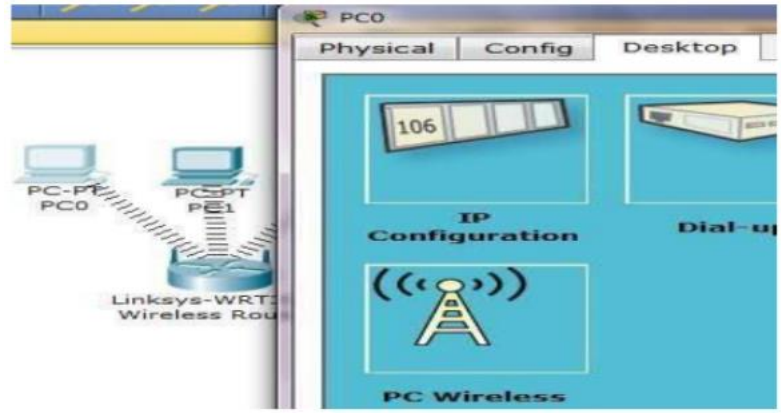
Starting Nmap 7.60 ( https://nmap.org ) at 2021-09-02 07:12 BST
Nmap scan report for ip-10-10-210-75.eu-west-1.compute.internal (10.10.210.75)
Host is up (0.00013s latency).
MAC Address: 02:83:75:3A:F2:89 (Unknown)
Nmap scan report for ip-10-10-210-100.eu-west-1.compute.internal (10.10.210.100)
Host is up (-0.100s latency).
MAC Address: 02:63:D0:1B:2D:CD (Unknown)
Nmap scan report for ip-10-10-210-165.eu-west-1.compute.internal (10.10.210.165)
Host is up (0.00025s latency).
MAC Address: 02:59:79:4F:17:B7 (Unknown)
Nmap scan report for ip-10-10-210-6.eu-west-1.compute.internal (10.10.210.6)
Host is up.
Nmap done: 256 IP addresses (4 hosts up) scanned in 3.12 seconds
```



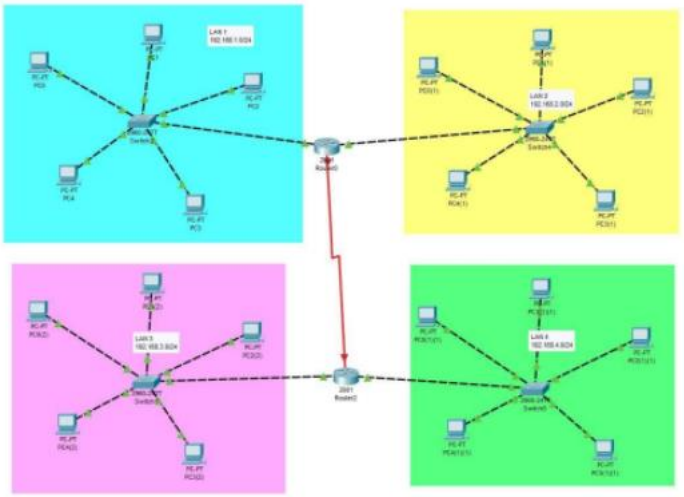


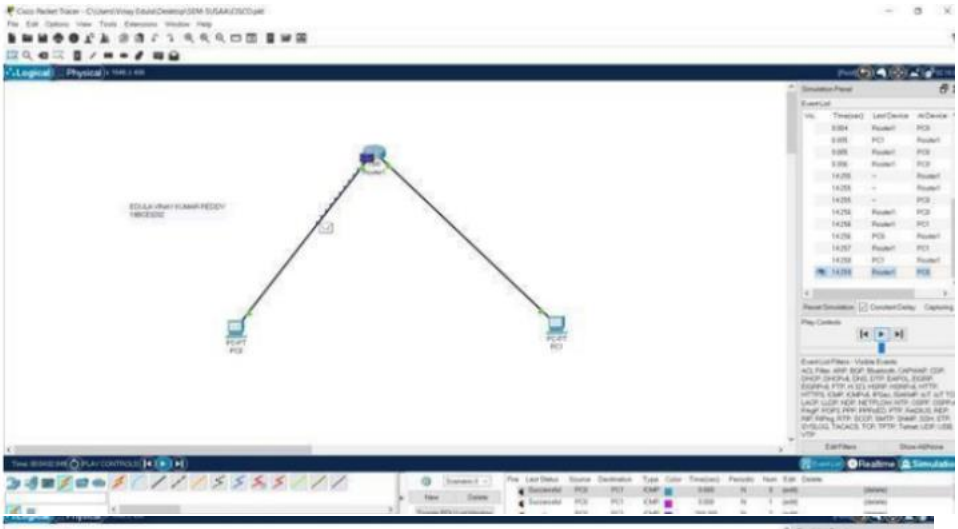


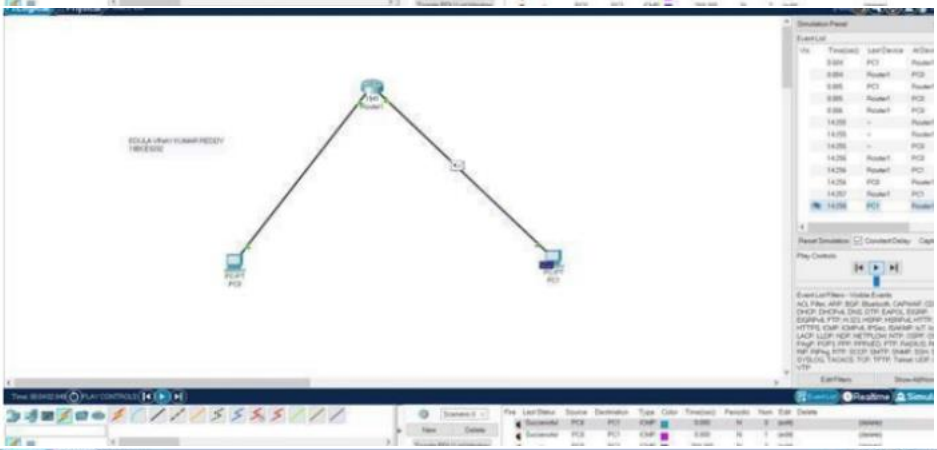
LINKSYS
A Division of Cisco Systems, Inc.
Wireless-N Broadband Router
Wireless
Setup
Wireless
Security
Access Restrictions
Applications & Gaming
Administration
Basic Wireless Settings
Wireless Security
Wireless MAC Filter
Wireless Security
Security Mode:
Disabled
Disabled
WEP
Help...

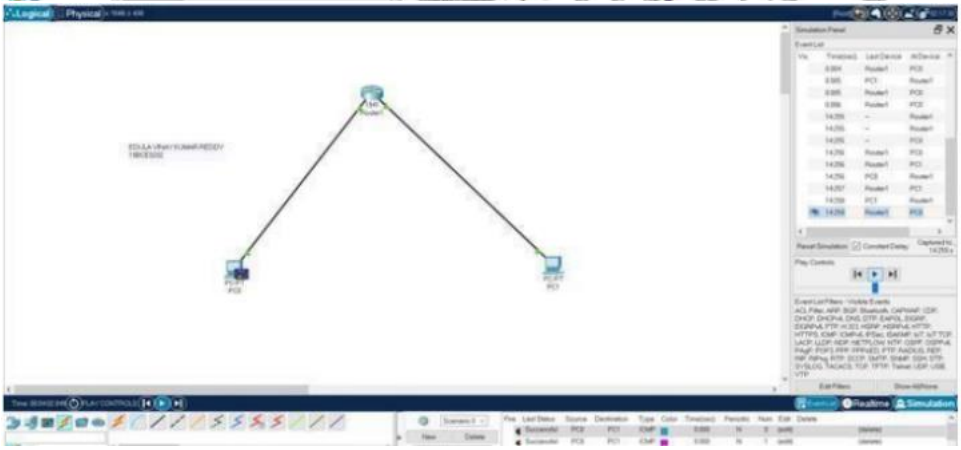

PC0
Physical
Config
Desktop
PC-PT PC0
PC-PT PE1
Linksys-WRT
Wireless Rou
106
IP Configuration
Dial-u
PC Wireless

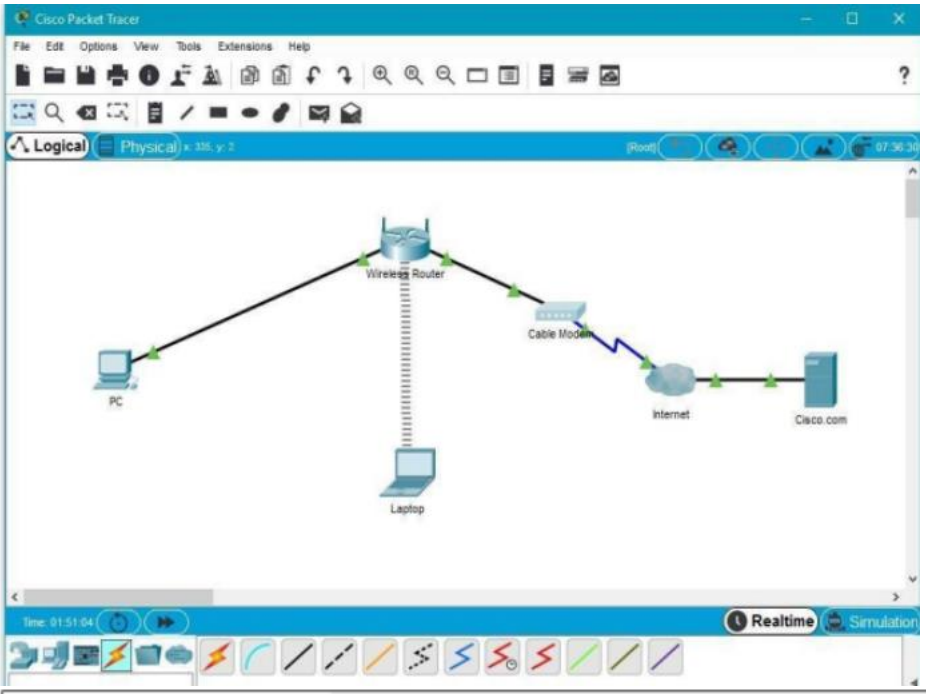

PC0
Physical
Config
Desktop
LINKSYS
A Division of Cisco Systems, Inc.
Link Information
Connect
Profiles
More Information
Infrastructure Mode
2.4GHz
You have successfully connected to the access point
Signal Strength
Link Quality
Adaptor is Active
Wireless-N Notebook Adapter
Wireless Network Monitor v1.0
WPC300N

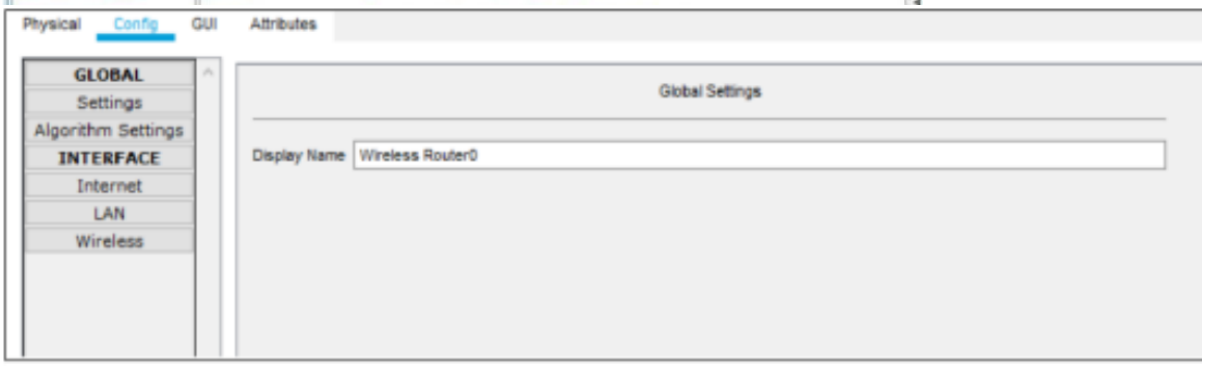


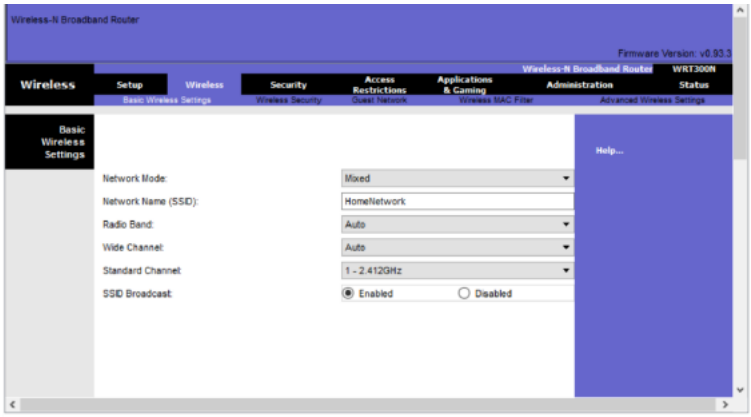


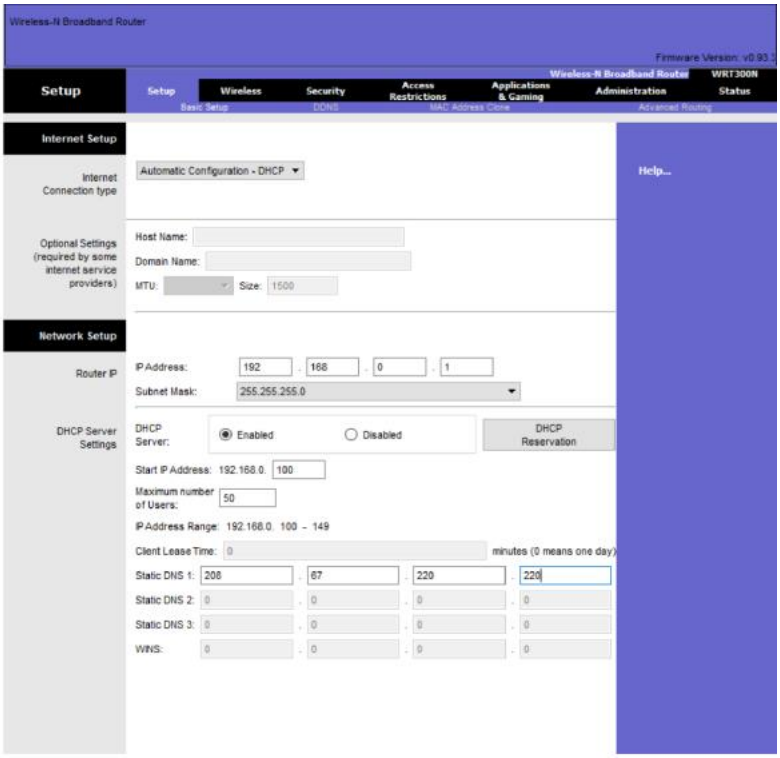




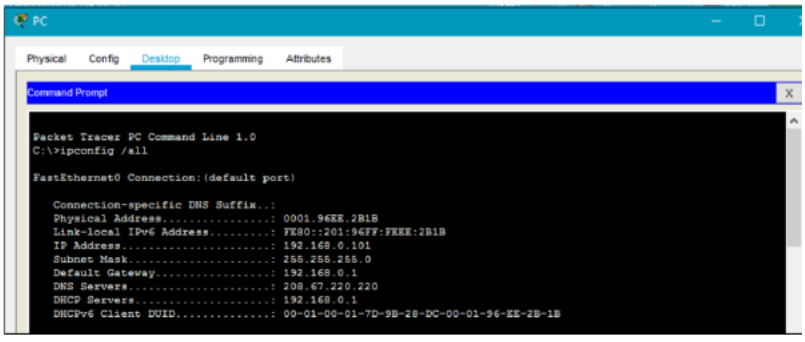

Cisco Packet Tracer
File Edit Options View Tools Extensions Help
Logical
Physical
Wireless Router
Cable Modem
PC
Internet
Cisco.com
Laptop
Realtime
Simulation

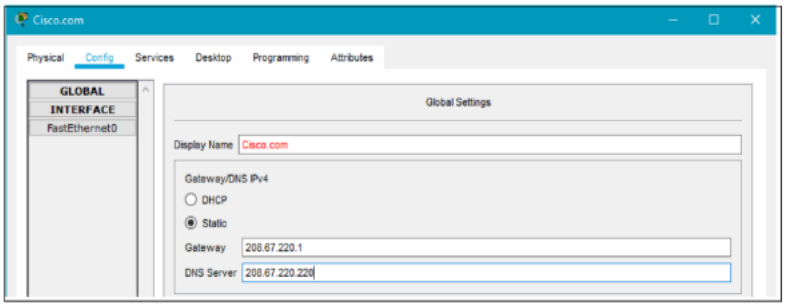

Physical
Config
GUI
Attributes
GLOBAL
Settings
Algorithm Settings
INTERFACE
Internet
LAN
Wireless
Global Settings
Display Name
Wireless Router0

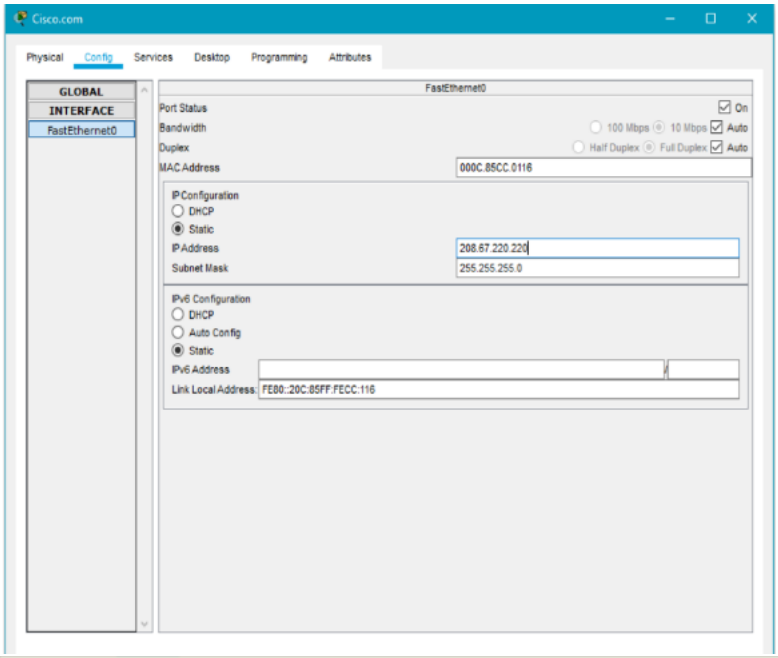

Wireless-N Broadband Router
Firmware Version: v0.93.3
Wireless
Setup
Wireless
Security
Access Restrictions
Applications & Gaming
Administration
Status
Basic Wireless Settings
Wireless Security
Guest Network
Wireless MAC Filter
Advanced Wireless Settings
Basic Wireless Settings
Help...
Network Mode:
Mixed
Network Name (SSID):
HomeNetwork
Radio Band:
Auto
Wide Channel:
Auto
Standard Channel:
1 - 2.412GHz
SSID Broadcast:
Enabled
Disabled

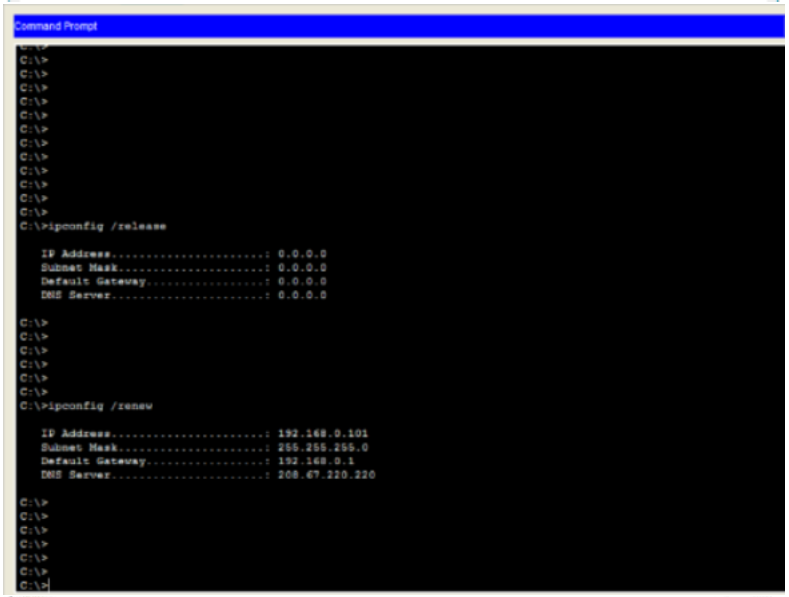

Wireless-N Broadband Router
Firmware Version: v0.93.3
Wireless-N Broadband Router WRT300N
Setup
Setup
Wireless
Security
Access Restrictions
Applications & Gaming
Administration
Status
Basic Setup
DDNS
MAC Address Clone
Advanced Routing
Internet Setup
Internet Connection type
Automatic Configuration - DHCP
Optional Settings (required by some internet service providers)
Host Name:
Domain Name:
MTU:
Size:
1500
Network Setup
Router IP
IP Address:
192
168
0
1
Subnet Mask:
255.255.255.0
DHCP Server Settings
DHCP Server:
Enabled
Disabled
DHCP Reservation
Start IP Address:
192.168.0.
100
Maximum number of Users:
50
IP Address Range:
192.168.0. 100 - 149
Client Lease Time:
0
minutes (0 means one day)
Static DNS 1:
208
67
220
220
Static DNS 2:
Static DNS 3:
WINS:
Help...

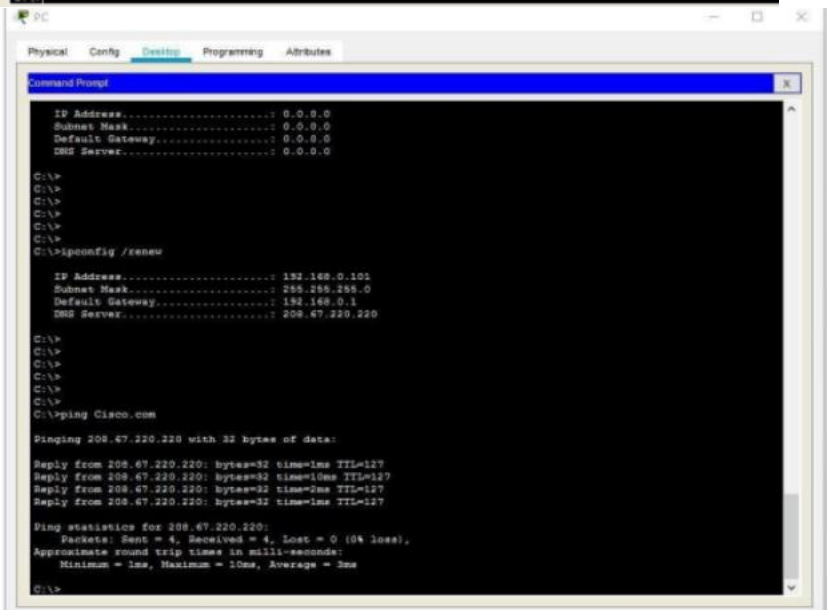

PC
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
DHCP request successful.
IP Address
192.168.0.101
Subnet Mask
255.255.255.0
Default Gateway
192.168.0.1
DNS Server
208.67.220.220

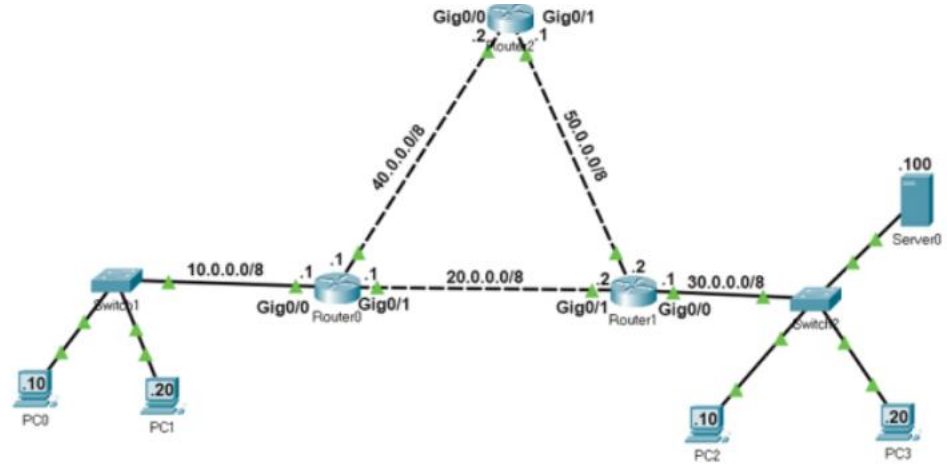

PC
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Packet Tracer PC Command Line 1.0
C:\>ipconfig /all
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Physical Address.....: 0001.96EE.2B1B
Link-local IPv6 Address.....: FE80::201:96FF:FEEE:2B1B
IP Address.....: 192.168.0.101
Subnet Mask.....: 255.255.255.0
Default Gateway.....: 192.168.0.1
DNS Servers.....: 208.67.220.220
DHCP Servers.....: 192.168.0.1
DHCPv6 Client DUID.....: 00-01-00-01-7D-9B-28-DC-00-01-96-EE-2B-1B


Cisco.com
Physical
Config
Services
Desktop
Programming
Attributes
GLOBAL
INTERFACE
FastEthernet0
Global Settings
Display Name
Cisco.com
Gateway/DNS IPv4
DHCP
Static
Gateway
208.67.220.1
DNS Server
208.67.220.220


Cisco.com
Physical
Config
Services
Desktop
Programming
Attributes
GLOBAL
INTERFACE
FastEthernet0
FastEthernet0
Port Status
On
Bandwidth
100 Mbps
10 Mbps
Auto
Duplex
Half Duplex
Full Duplex
Auto
MAC Address
000C.85CC.0116
IP Configuration
DHCP
Static
IP Address
208.67.220.220
Subnet Mask
255.255.255.0
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
Link Local Address
FE80::20C:85FF:FECC:116


Command Prompt
C:\>ipconfig /release
IP Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: 0.0.0.0
DNS Server.....: 0.0.0.0
C:\>ipconfig /renew
IP Address.....: 192.168.0.101
Subnet Mask.....: 255.255.255.0
Default Gateway.....: 192.168.0.1
DNS Server.....: 208.67.220.220


PC
Physical
Config
Desktop
Programming
Attributes
Command Prompt
IP Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: 0.0.0.0
DNS Server.....: 0.0.0.0
C:\>ipconfig /renew
IP Address.....: 192.168.0.101
Subnet Mask.....: 255.255.255.0
Default Gateway.....: 192.168.0.1
DNS Server.....: 208.67.220.220
C:\>ping Cisco.com
Pinging 208.67.220.220 with 32 bytes of data:
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Reply from 208.67.220.220: bytes=32 time=10ms TTL=127
Reply from 208.67.220.220: bytes=32 time=2ms TTL=127
Reply from 208.67.220.220: bytes=32 time=1ms TTL=127
Ping statistics for 208.67.220.220:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 10ms, Average = 3ms




Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2 10 Primary route
Router(config)#ip route 30.0.0.0 255.0.0.0 40.0.0.2 20 Backup route
Router(config)#ip route 30.0.0.100 255.255.255.255 40.0.0.2 10 Primary route
Router(config)#ip route 30.0.0.100 255.255.255.255 20.0.0.2 20 Backup route
Router(config)#ip route 50.0.0.0 255.0.0.0 40.0.0.2 10 Primary route
Router(config)#ip route 50.0.0.0 255.0.0.0 20.0.0.2 20 Backup route
Router(config)#exit
Router#show ip route static
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
S       30.0.0.0/8 [10/0] via 20.0.0.2
S       30.0.0.100/32 [10/0] via 40.0.0.2
S    50.0.0.0/8 [10/0] via 40.0.0.2

Router#
```

Router adds only primary routes to the routing table.

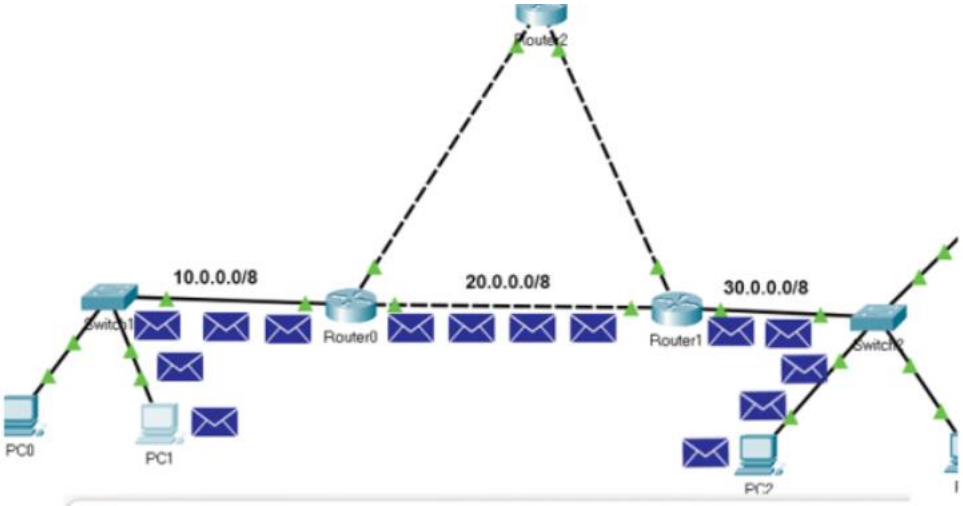
Router2

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line.  End with
Router(config)#ip route 10.0.0.0 255.0.0.0 40.0.0.1
Router(config)#ip route 30.0.0.0 255.0.0.0 50.0.0.2
Router(config)#exit
Router#show ip route static
S    10.0.0.0/8 [1/0] via 40.0.0.1
S    30.0.0.0/8 [1/0] via 50.0.0.2

Router#
```




```
Command Prompt

Packet Tracer PC Command Line 1.0
PC>ipconfig

FastEthernet0 Connection:(default port)
Link-local IPv6 Address.....: FE80::260:70F
IP Address.....: 20.0.0.2
Subnet Mask.....: 255.0.0.0
Default Gateway.....: 20.0.0.1

PC>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Request timed out.
Reply from 10.0.0.2: bytes=32 time=3ms TTL=126
Reply from 10.0.0.2: bytes=32 time=3ms TTL=126
Reply from 10.0.0.2: bytes=32 time=3ms TTL=126

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (
Approximate round trip times in milli-seconds:
    Minimum = 3ms, Maximum = 3ms, Average = 3ms

PC>
```



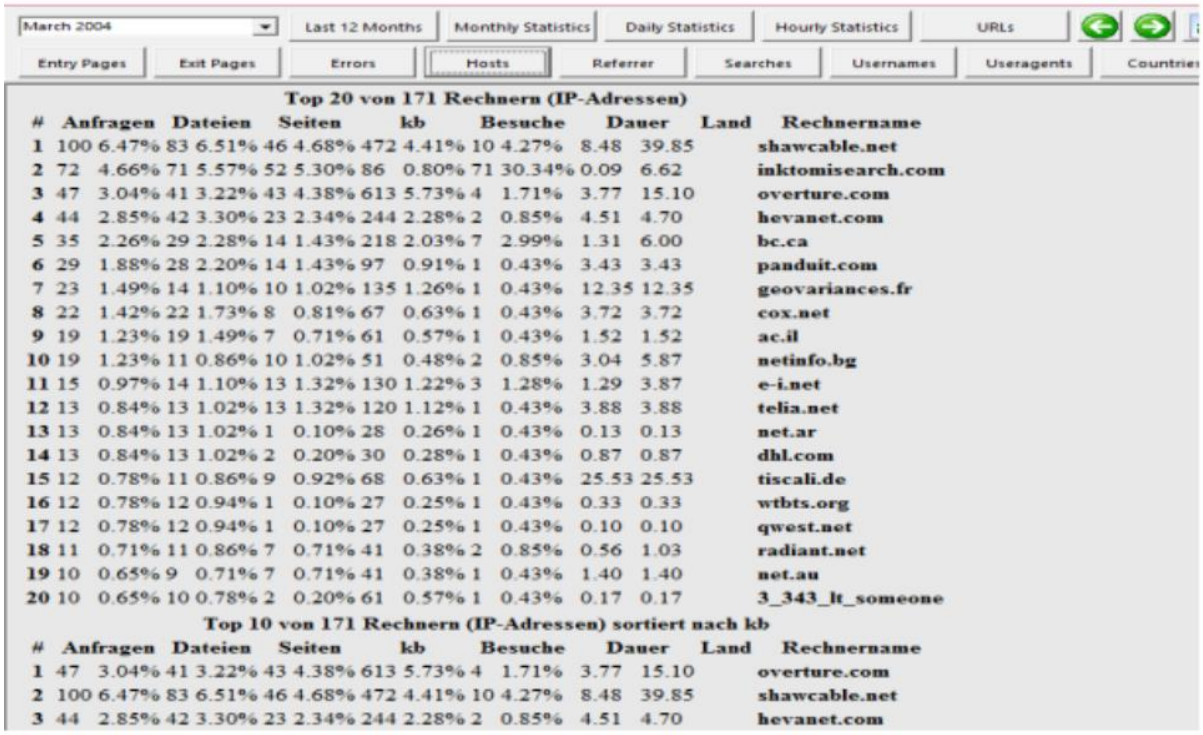




Seiten - Dokument-Abfragen (z.B. html, asp, txt); Dateien - erfolgreiche Anfragen für alle Typen (z.B. html, gif, css); Treffer - alle Anfragen, inklusive Fehler;

**Tages-Statistik im Monat Maerz 2004**

| Tag | Anfragen | | | Dateien | | | Seiten | | | Besuche | | | Rechner | | | kb | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Summe | Schnitt | Maximum | Summe | Schnitt | Maximum | Summe | Schnitt | Maximum | Summe | Schnitt | Maximum | Summe | Schnitt | Maximum | Summe | Schnitt | Maximum |
| 7 | 197 12.74% | 25 | 29 | 147 11.54% | 18 | 21 | 186 18.94% | 23 | 27 | 15 6.41% | 2 | 3 | 14 8.19% | 2 | 3 | 2383 22.27% | 298 | 542 |
| 8 | 559 36.16% | 24 | 63 | 478 37.52% | 21 | 56 | 419 42.67% | 18 | 40 | 57 24.36% | 2 | 7 | 48 28.07% | 2 | 7 | 4509 42.14% | 196 | 386 |
| 9 | 232 15.01% | 11 | 29 | 205 16.09% | 10 | 29 | 118 12.02% | 6 | 16 | 49 20.94% | 2 | 5 | 44 25.73% | 2 | 5 | 955 8.93% | 45 | 138 |
| 10 | 286 18.50% | 14 | 102 | 205 16.09% | 10 | 34 | 124 12.63% | 6 | 28 | 46 19.66% | 2 | 5 | 38 22.22% | 2 | 4 | 1336 12.49% | 67 | 379 |




**Top 20 von 171 Rechnern (IP-Adressen)**

| # | Anfragen | | Dateien | | Seiten | | kb | | Besuche | | Dauer | | Land | Rechnername |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 100 | 6.47% | 83 | 6.51% | 46 | 4.68% | 472 | 4.41% | 10 | 4.27% | 8.48 | 39.85 | | shawcable.net |
| 2 | 72 | 4.66% | 71 | 5.57% | 52 | 5.30% | 86 | 0.80% | 71 | 30.34% | 0.09 | 6.62 | | inktomisearch.com |
| 3 | 47 | 3.04% | 41 | 3.22% | 43 | 4.38% | 613 | 5.73% | 4 | 1.71% | 3.77 | 15.10 | | overture.com |
| 4 | 44 | 2.85% | 42 | 3.30% | 23 | 2.34% | 244 | 2.28% | 2 | 0.85% | 4.51 | 4.70 | | hevanet.com |
| 5 | 35 | 2.26% | 29 | 2.28% | 14 | 1.43% | 218 | 2.03% | 7 | 2.99% | 1.31 | 6.00 | | bc.ca |
| 6 | 29 | 1.88% | 28 | 2.20% | 14 | 1.43% | 97 | 0.91% | 1 | 0.43% | 3.43 | 3.43 | | panduit.com |
| 7 | 23 | 1.49% | 14 | 1.10% | 10 | 1.02% | 135 | 1.26% | 1 | 0.43% | 12.35 | 12.35 | | geovariances.fr |
| 8 | 22 | 1.42% | 22 | 1.73% | 8 | 0.81% | 67 | 0.63% | 1 | 0.43% | 3.72 | 3.72 | | cox.net |
| 9 | 19 | 1.23% | 19 | 1.49% | 7 | 0.71% | 61 | 0.57% | 1 | 0.43% | 1.52 | 1.52 | | ac.il |
| 10 | 19 | 1.23% | 11 | 0.86% | 10 | 1.02% | 51 | 0.48% | 2 | 0.85% | 3.04 | 5.87 | | netinfo.bg |
| 11 | 15 | 0.97% | 14 | 1.10% | 13 | 1.32% | 130 | 1.22% | 3 | 1.28% | 1.29 | 3.87 | | e-i.net |
| 12 | 13 | 0.84% | 13 | 1.02% | 13 | 1.32% | 120 | 1.12% | 1 | 0.43% | 3.88 | 3.88 | | telia.net |
| 13 | 13 | 0.84% | 13 | 1.02% | 1 | 0.10% | 28 | 0.26% | 1 | 0.43% | 0.13 | 0.13 | | net.ar |
| 14 | 13 | 0.84% | 13 | 1.02% | 2 | 0.20% | 30 | 0.28% | 1 | 0.43% | 0.87 | 0.87 | | dhl.com |
| 15 | 12 | 0.78% | 11 | 0.86% | 9 | 0.92% | 68 | 0.63% | 1 | 0.43% | 25.53 | 25.53 | | tiscali.de |
| 16 | 12 | 0.78% | 12 | 0.94% | 1 | 0.10% | 27 | 0.25% | 1 | 0.43% | 0.33 | 0.33 | | wtbts.org |
| 17 | 12 | 0.78% | 12 | 0.94% | 1 | 0.10% | 27 | 0.25% | 1 | 0.43% | 0.10 | 0.10 | | qwest.net |
| 18 | 11 | 0.71% | 11 | 0.86% | 7 | 0.71% | 41 | 0.38% | 2 | 0.85% | 0.56 | 1.03 | | radiant.net |
| 19 | 10 | 0.65% | 9 | 0.71% | 7 | 0.71% | 41 | 0.38% | 1 | 0.43% | 1.40 | 1.40 | | net.au |
| 20 | 10 | 0.65% | 10 | 0.78% | 2 | 0.20% | 61 | 0.57% | 1 | 0.43% | 0.17 | 0.17 | | 3_343_lt_someone |

**Top 10 von 171 Rechnern (IP-Adressen) sortiert nach kb**

| # | Anfragen | | Dateien | | Seiten | | kb | | Besuche | | Dauer | | Land | Rechnername |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 47 | 3.04% | 41 | 3.22% | 43 | 4.38% | 613 | 5.73% | 4 | 1.71% | 3.77 | 15.10 | | overture.com |
| 2 | 100 | 6.47% | 83 | 6.51% | 46 | 4.68% | 472 | 4.41% | 10 | 4.27% | 8.48 | 39.85 | | shawcable.net |
| 3 | 44 | 2.85% | 42 | 3.30% | 23 | 2.34% | 244 | 2.28% | 2 | 0.85% | 4.51 | 4.70 | | hevanet.com |