


Software cache speedup by width and database size

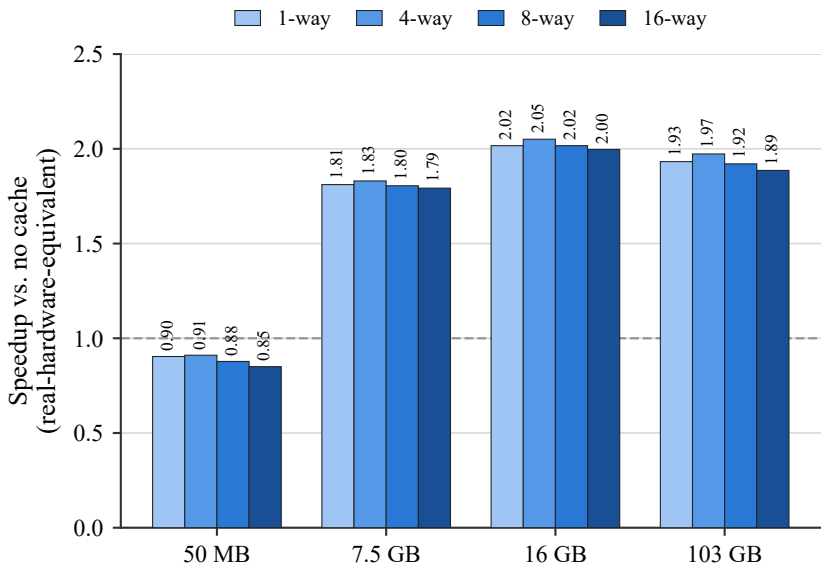

50-read workload. Speedup computed from simulated CYCLES / core frequency (real-hardware-equivalent time), not Sniper's own simulation wall-clock.

Width shown = the SOFTWARE S2 lookup-cache's associativity (kraken2's own code).

Real Luna HARDWARE cache is fixed and unchanged throughout: L1d 48KB/12-way, L1i 32KB/8-way, L2 2MB/16-way, L3 105MB/15-way (96 cores/socket), 2.1GHz.