


REDES DE COMPUTADORAS
EJERCICIO NUMERO 5
CONEXION 8 ROUTERS




PROFESOR: RODRIGUEZ MORA GONZALO
ALUMNO: LARA ABARCA DAMIAN

EVIDENCIAS

Router 1

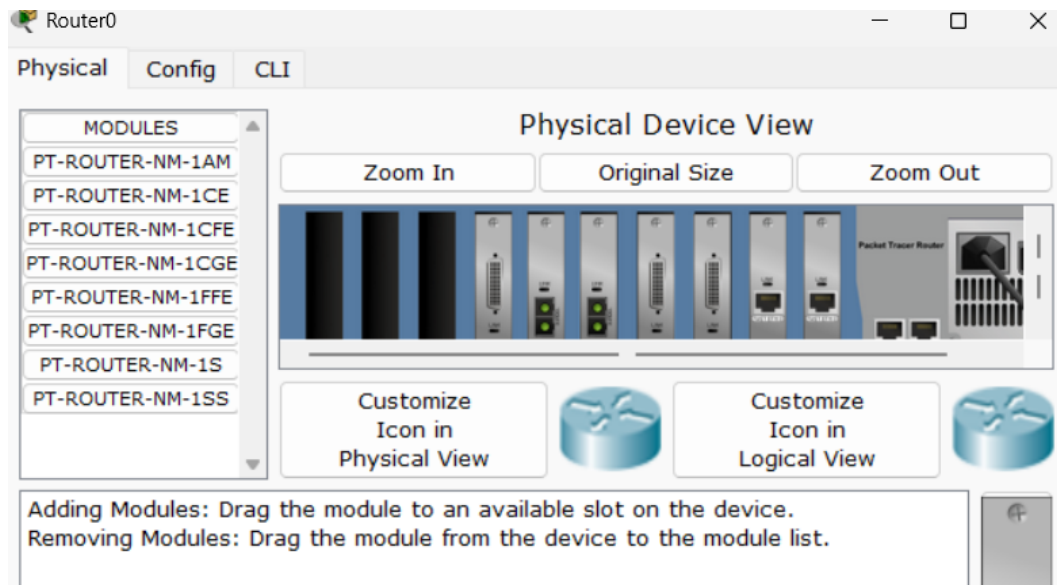

RIP

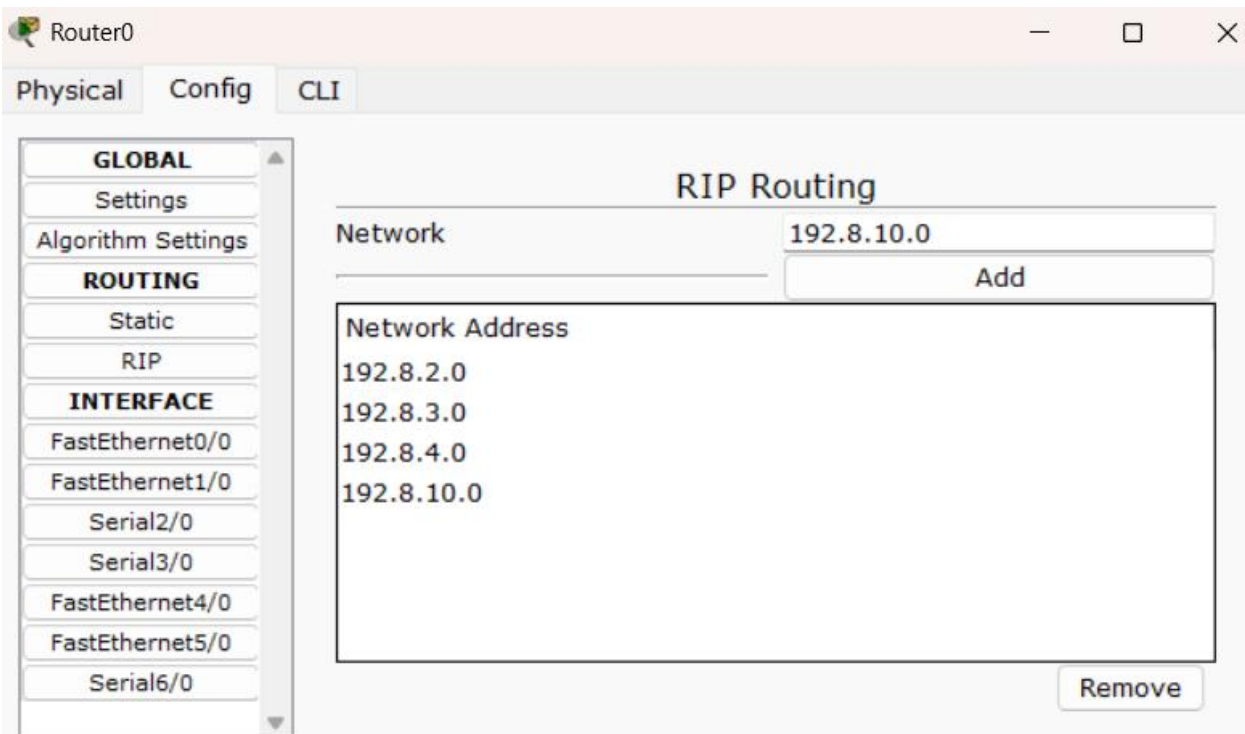

Equivalent IOS Commands

```
Router1(Config)#
```

Fast Ethernet.

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Serial6/0

FastEthernet0/0

Port Status

Bandwidth

Duplex

MAC Address

IP Address

Subnet Mask

Tx Ring Limit

On

Auto

100 Mbps

Auto

Full Duplex

0001.43BB.A1AE

192.8.10.1

255.255.255.0

10

Equivalent IOS Commands

Serial.

Router0

Physical

Config

CLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Serial6/0

Serial2/0

Port Status

☒ On

Clock Rate

9600

Duplex

☒ Full Duplex

IP Address

192.8.2.2

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

Router(config)#interface FastEthernet4/0

Router(config-if)#

Router(config-if)#exit

Router(config)#interface Serial2/0

Router(config-if)#

GLOBAL	Serial3/0	
Settings		
Algorithm Settings		
ROUTING		
Static		
RIP		
INTERFACE		
FastEthernet0/0		
FastEthernet1/0		
Serial2/0		
Serial3/0		
FastEthernet4/0		
FastEthernet5/0		
Serial6/0		

Port Status	☒ On
Clock Rate	9600 ▼
Duplex	☐ Full Duplex
IP Address	192.8.3.1
Subnet Mask	255.255.255.0
Tx Ring Limit	10

Equivalent IOS Commands

```
Router(config)#interface Serial3/0
Router(config-if)#
```

Physical	Config	CLI
----------	--------	-----


GLOBAL	Serial6/0	
Settings		
Algorithm Settings		
ROUTING		
Static		
RIP		
INTERFACE		
FastEthernet0/0		
FastEthernet1/0		
Serial2/0		
Serial3/0		
FastEthernet4/0		
FastEthernet5/0		
Serial6/0		

Port Status	☒ On
Clock Rate	9600 ▼
Duplex	☐ Full Duplex
IP Address	192.8.4.1
Subnet Mask	255.255.255.0
Tx Ring Limit	10


Equivalent IOS Commands

```
Router(config)#interface Serial3/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial6/0
```

Router 2

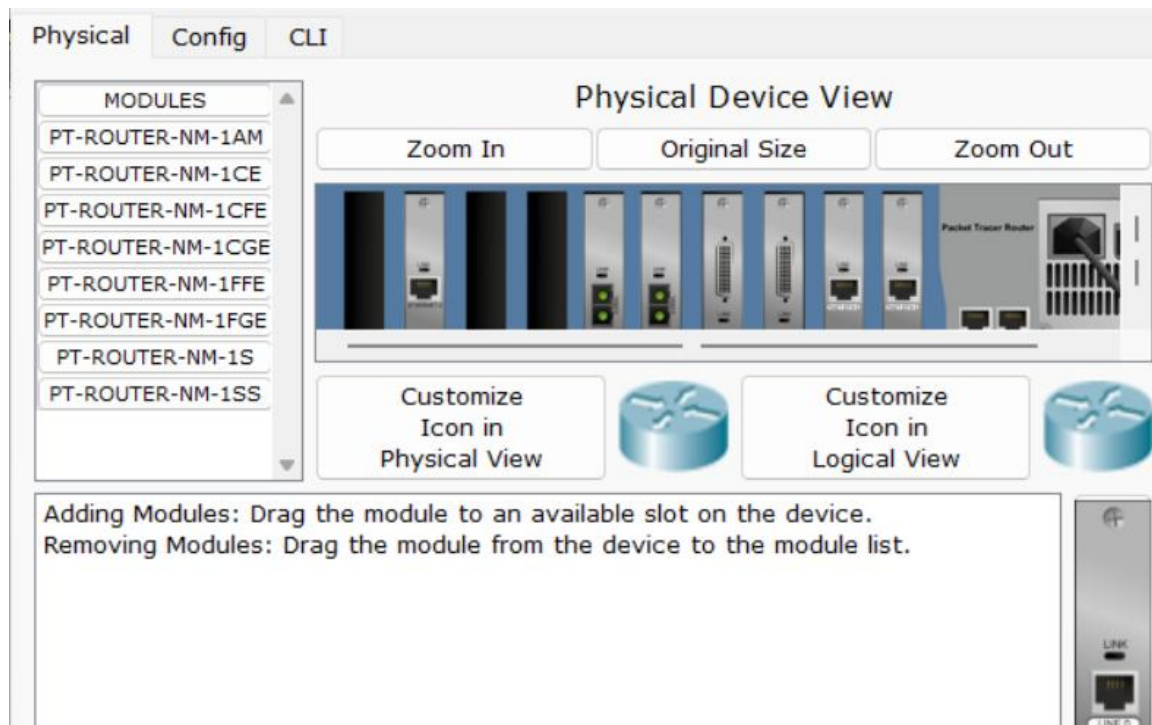

RIP

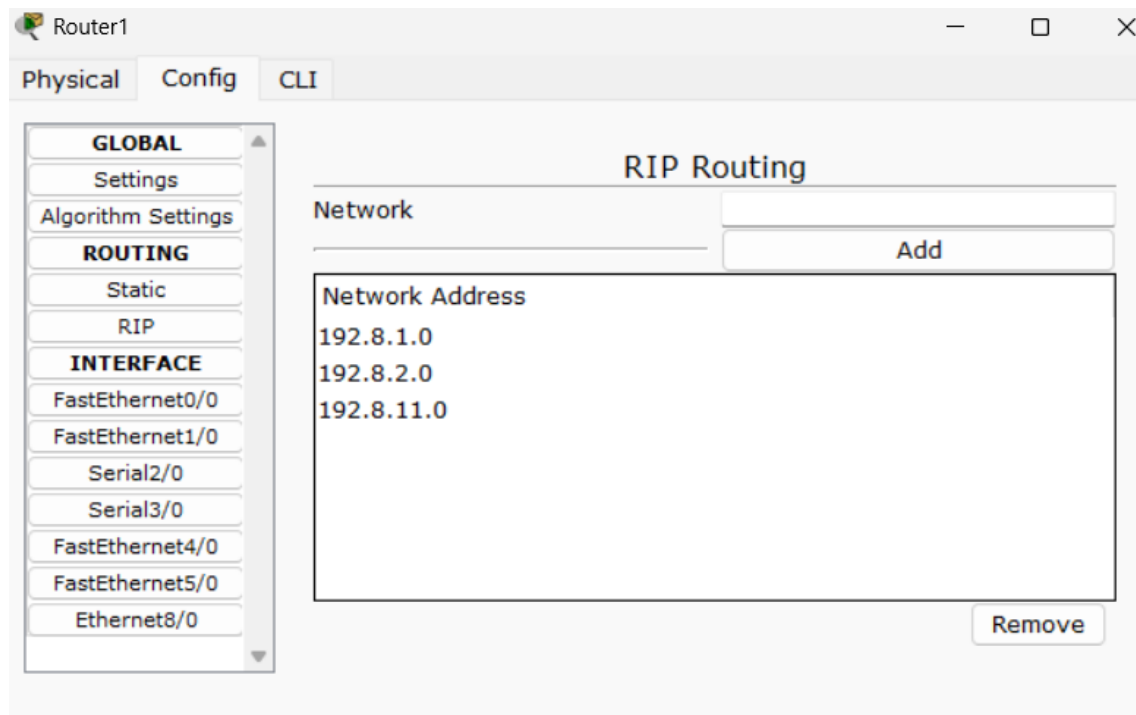

Fast Ethernet.

Router1

PhysicalConfigCLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Ethernet8/0

FastEthernet0/0

Port Status

Bandwidth

Duplex

MAC Address

IP Address

Subnet Mask

Tx Ring Limit

On

Auto

100 Mbps

Auto

0001.6405.75E3

192.8.1.1

255.255.255.0

10

Equivalent IOS Commands

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
```

Serial.

Router 1

Physical Config CLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Ethernet8/0

Serial2/0

Port Status ☒ On

Clock Rate 9600

Duplex ☐ Full Duplex

IP Address 192.8.2.1

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Equivalent IOS Commands

```
Router(config)#interface FastEthernet1/0
Router(config-if)#
Router(config-if)#exit
```


Router1

Physical Config CLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Ethernet8/0

Serial3/0

Port Status ☒ On

Clock Rate 9600

Duplex ☐ Full Duplex

IP Address 192.8.11.1

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Equivalent IOS Commands

```
Router(config)#interface Serial2/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial3/0
```

Router 3

Router2

Physical Config CLI

MODULES

PT-ROUTER-NM-1AM

PT-ROUTER-NM-1CE

PT-ROUTER-NM-1CFE

PT-ROUTER-NM-1CGE

PT-ROUTER-NM-1FFE

PT-ROUTER-NM-1FGE

PT-ROUTER-NM-1S

PT-ROUTER-NM-1SS

Physical Device View


Zoom In Original Size Zoom Out

Customize Icon in Physical View

Customize Icon in Logical View

Packet Tracer Router

RIP

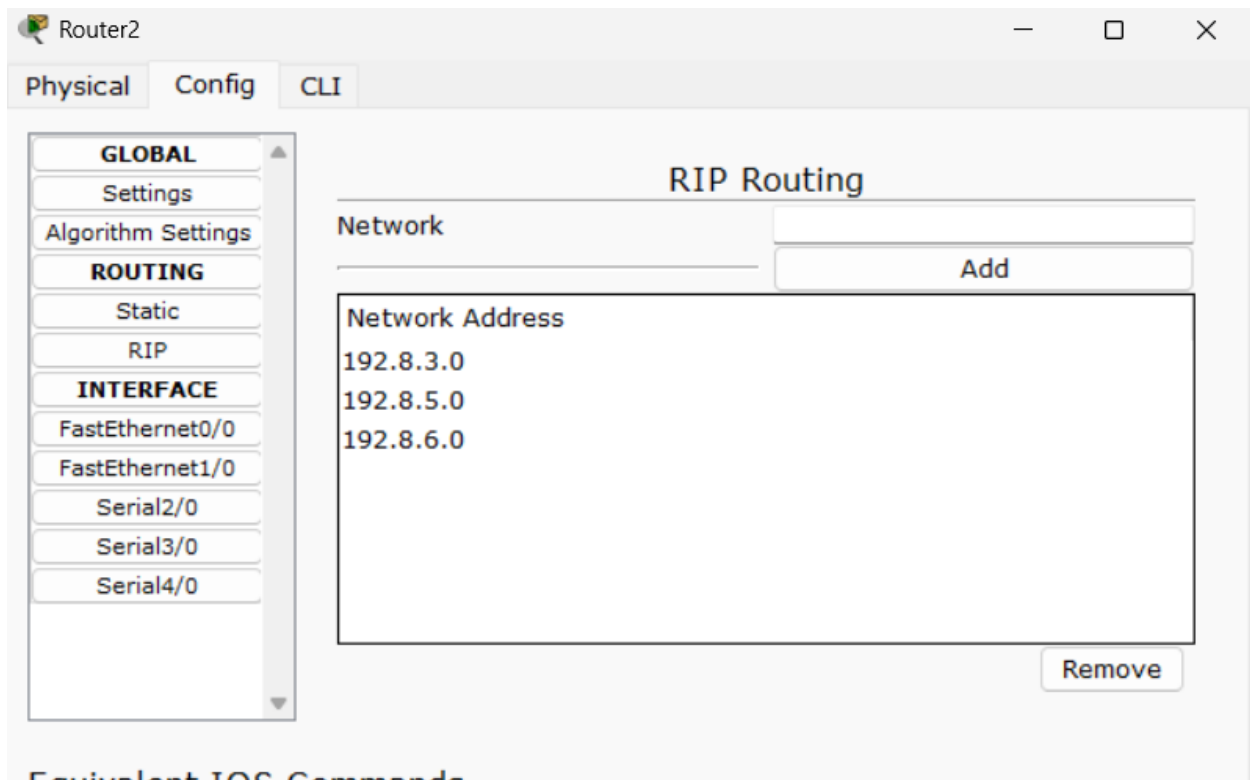

Fast Ethernet.

N/A

Serial.

Router2

Physical

Config

CLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

Serial4/0

Serial2/0

Serial2/0

Port Status

☒ On

Clock Rate

9600

Duplex

☐ Full Duplex

IP Address

192.8.5.1

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

Router(config)#interface Serial2/0

Router(config-if)#

Router(config-if)#exit

Router(config)#interface Serial2/0

Router(config-if)#

Router2

PhysicalConfigCLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

Serial4/0

Serial3/0

Port Status

☒ On

Clock Rate

9600

Duplex

☐ Full Duplex

IP Address

192.8.3.2

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

Router(config)#interface Serial2/0

Router(config-if)#

Router(config-if)#exit

Router(config)#interface Serial3/0

Router(config-if)#

Router2

PhysicalConfigCLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

Serial4/0

Serial4/0

Port Status

☒ On

Clock Rate

9600

Duplex

☒ Full Duplex

IP Address

192.8.6.1

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

```
Router(config)#interface Serial4/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial4/0
Router(config-if)#
```

Router 4

Physical Config CLI

Physical Device View

Zoom In Original Size Zoom Out



Customize Icon in Physical View Customize Icon in Logical View

Adding Modules: Drag the module to an available slot on the device.
Removing Modules: Drag the module from the device to the module list.

MODULES

- PT-ROUTER-NM-1AM
- PT-ROUTER-NM-1CE
- PT-ROUTER-NM-1CFE
- PT-ROUTER-NM-1CGE
- PT-ROUTER-NM-1FFE
- PT-ROUTER-NM-1FGE
- PT-ROUTER-NM-1S
- PT-ROUTER-NM-1SS

RIP

Router3

Physical Config CLI

RIP Routing

Network

Add

Network Address

- 192.8.5.0
- 192.8.7.0
- 192.8.8.0
- 192.8.11.0

Remove

GLOBAL

- Settings
- Algorithm Settings

ROUTING

- Static
- RIP

INTERFACE

- FastEthernet0/0
- FastEthernet1/0
- Serial2/0
- Serial3/0
- FastEthernet4/0
- Serial5/0

Fast Ethernet.

Router3

Physical Config CLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

Serial5/0

FastEthernet0/0

Port Status	☒ On
Bandwidth	☒ Auto
☐ 10 Mbps ☒ 100 Mbps	
Duplex	☒ Auto
☒ Full Duplex ☐ Half Duplex	
MAC Address	00E0.A3A5.4C56
IP Address	192.8.8.1
Subnet Mask	255.255.255.128
Tx Ring Limit	10

Equivalent IOS Commands

Router3

Physical Config CLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

Serial5/0

FastEthernet1/0

Port Status	☒ On
Bandwidth	☒ Auto
☐ 10 Mbps ☒ 100 Mbps	
Duplex	☒ Auto
☒ Full Duplex ☐ Half Duplex	
MAC Address	0004.9A4C.D078
IP Address	192.8.8.129
Subnet Mask	255.255.255.128
Tx Ring Limit	10

Equivalent IOS Commands

Serial.

Physical

Config

CLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

Serial5/0

Serial2/0

Port Status

☒ On

Clock Rate

9600

Duplex

☐ Full Duplex

IP Address

192.8.5.1

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

Router(config)#interface FastEthernet4/0

Router(config-if)#

Router(config-if)#exit

Router(config)#interface Serial2/0

Router3

Physical

Config

CLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

Serial5/0

Serial3/0

Serial3/0

Port Status

☒ On

Clock Rate

9600

Duplex

☒ Full Duplex

IP Address

192.8.11.2

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

Router(config)#interface Serial3/0

Router(config-if)#

Router(config-if)#exit

Router3

PhysicalConfigCLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

Serial5/0

Serial5/0

Port Status

☒ On

Clock Rate

9600

Duplex

☐ Full Duplex

IP Address

192.8.7.1

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

Router(config)#interface Serial5/0


Router(config-if)#

Router(config-if)#exit


Router(config)#interface Serial5/0

Router(config-if)#

Router 5

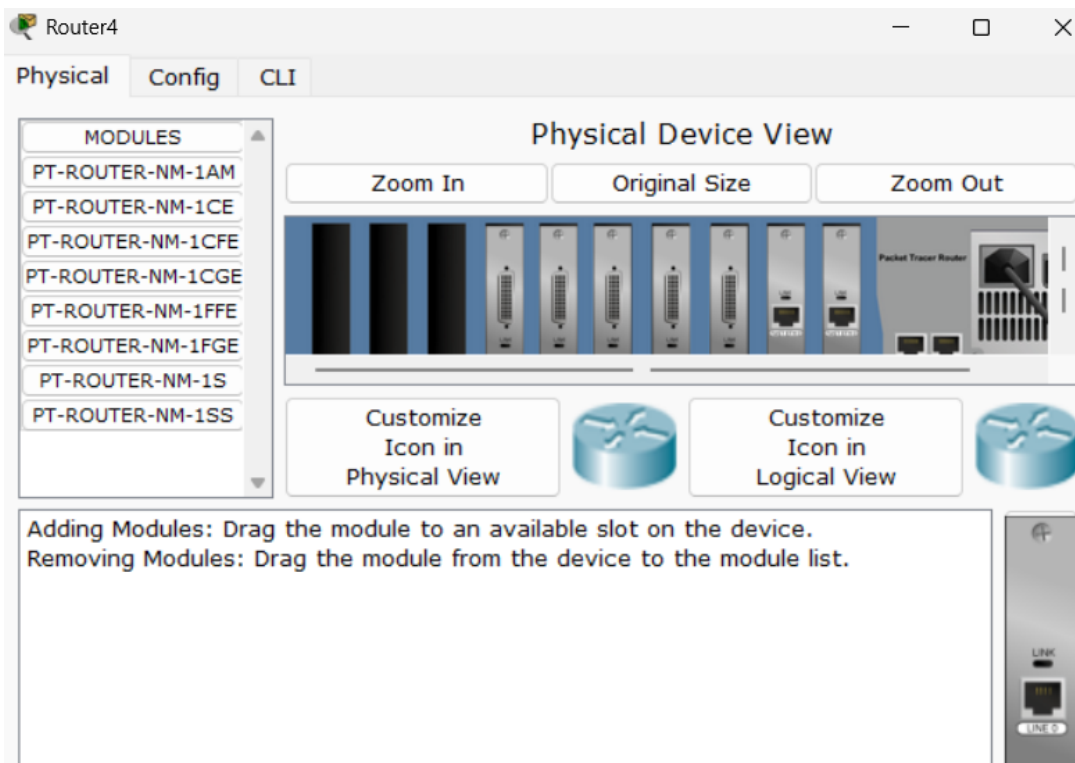

RIP

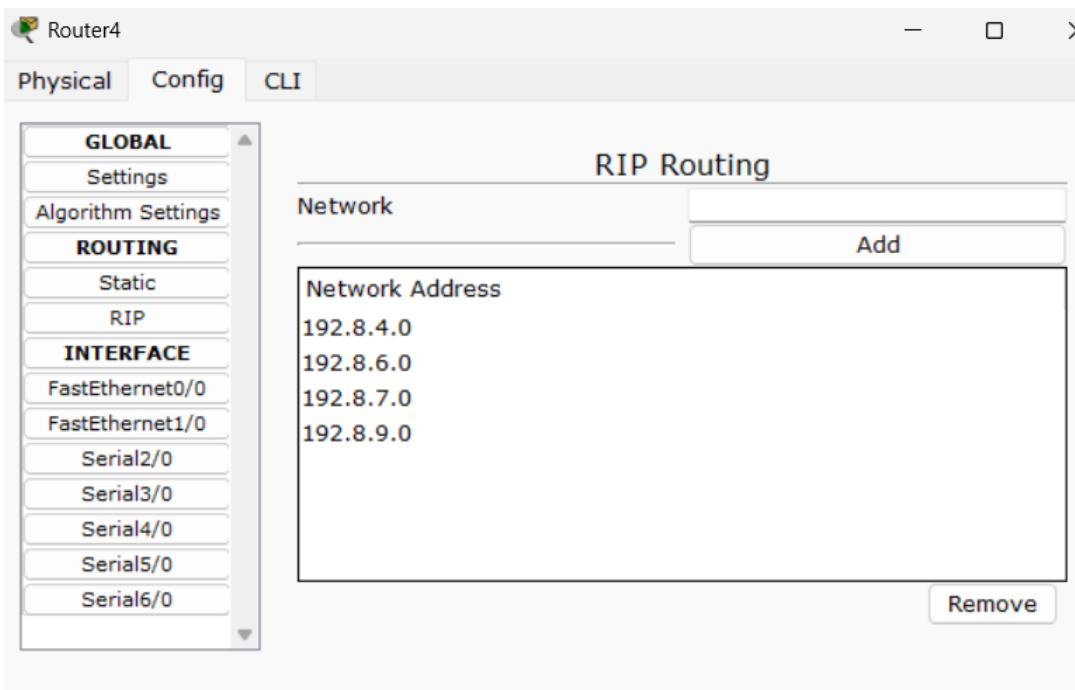

Fast Ethernet.

Router4

PhysicalConfigCLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

Serial4/0

Serial5/0

Serial6/0

FastEthernet0/0

Port Status

Bandwidth

Duplex

MAC Address

IP Address

Subnet Mask

Tx Ring Limit

On

Auto

100 Mbps

Auto

0060.7074.0B21

192.8.9.1

255.255.255.0

10

Equivalent IOS Commands

```
Router(config)#router rip
Router(config-router)#
Router(config-router)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
```

Serial.

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

Serial4/0

Serial5/0

Serial6/0

Serial4/0

Port Status ☒ On

Clock Rate 9600 ▼

Duplex ☐ Full Duplex

IP Address 192.8.6.2

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Equivalent IOS Commands

```
Router(config)#interface Serial3/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial4/0
Router(config-if)#
```

Router4

Physical

Config

CLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

Serial4/0

Serial5/0

Serial6/0

Serial5/0

Serial5/0

Port Status

☒ On

Clock Rate

9600

Duplex

☐ Full Duplex

IP Address

192.8.7.2

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Router4

hysicalConfigCLI

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

Serial4/0

Serial5/0

Serial6/0

Serial6/0

Port Status

☒ On

Clock Rate

9600

Duplex

☐ Full Duplex

IP Address

192.8.4.2

Subnet Mask

255.255.255.0

Tx Ring Limit

10

Equivalent IOS Commands

Router(config)#interface Serial6/0

Router(config-if)#

Router(config-if)#exit

Router(config)#interface Serial6/0

Router(config-if)#

MODELADO

