


## Category 6 Shielded Keystone Jack

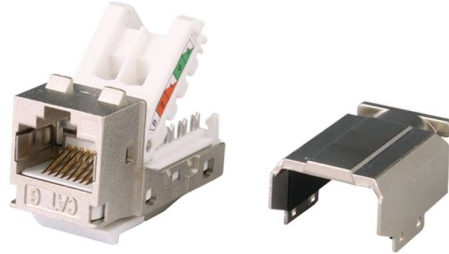

Category 6 shielded keystone jack is designed for superior performance and easy assembly, meets and exceeds ANSI/TIA-568.2-D and ISO/IEC 11801 2nd edition Category 6 standards, supporting Gigabit Ethernet application and beyond. Narrow width design fits 24 ports in one unit panel for most efficient use of 1U panel.

### Features

Zinc-alloy metal shell

Contacts are phosphor bronze plated with 50 micro inches hard gold

Dual T568A & T568B wiring

Polycarbonate 94V0 rated

Intertek ETL / Force EC Cat.6<sub>A</sub> VERIFIED

4PPoE compliant in accordance with IEEE802.3bt Type 4

### Ordering Information

Part No.	Description
<b>1A68TPZ00</b>	RJ45, 8-Conductor Cat.6, Tool-free, Shielded, 180 degree, H.D. version
<b>2A68KPS00</b>	RJ45, 8-Conductor Cat.6, KRONE/110 IDC, Shielded, 180 degree, H.D. version
<b>5A68TPZ00</b>	RJ45, 8-Conductor Cat.6, Tool-free, Shielded, 180 degree, H.D. version
<b>6A68TPZ00</b>	RJ45, 8-Conductor Cat.6, Tool-free, Shielded, 180 degree, H.D. version
<b>7A68TPZ00</b>	RJ45, 8-Conductor Cat.6, Tool-free, Shielded, 180 degree, H.D. version
<b>1B68TPZ00</b>	RJ45, 8-Conductor Cat.6, Tool-free, Shielded, 180 degree, H.D. version, fits 0.5U panel
<b>7B68TPZ00</b>	RJ45, 8-Conductor Cat.6, Tool-free, Shielded, 180 degree, H.D. version, fits 0.5U panel
<b>1K68KPS00</b>	RJ45, 8-Conductor Cat.6, KRONE/110 IDC, Shielded, 90 degree, H.D. version
<b>2K68TPZ00</b>	RJ45, 8-Conductor Cat.6, KRONE/110 IDC, Shielded, 90 degree, Short depth design, L=29.86mm

<b>0T68TPZ00</b>	RJ45, 8-Conductor Cat.6, Tool-free, Shielded, 90 degree, H.D. version
<b>1T68TPZ00</b>	RJ45, 8-Conductor Cat.6, Tool-free, Shielded, 90 degree, H.D. version, L=34.5mm